



### ODU-MAC® Blue-Line

#### **FEATURES**

- · Universal solution: fast, modular and flexible
- Variety of locking options for plastic and metal housings
- > 10,000 mating cycles
- Clip-in assembly / removal of the modules without tools
- Easy replacement of crimp-clip contacts, even when assembled
- Wide range of transmission types
- Ultra-compact connector

ATTENTION: All shown connectors and cable assemblies are defined without breaking capacity (COC) according to IEC 61984:2008 (VDE 0627:2009-11).

#### **APPLICATIONS**

- Medical
- · Test and measurement
- · Military, security and communications
- Industrial
- Automotive



The majority of ODU-MAC® modules and contacts have been certified according to UL 1977:2022/CSA C22.2 No. 182.3-16:2016 [E file no.: E110586] and tested to MIL / SAE / EIA.

#### Data transmission protocols

The contact arrangement of an ODU data transmission connector differs from a standard data transmission connector due to the robust ODU specific design. However, the ODU design meets the electrical specifications that are derived from the respective standard data transmission protocol.

#### Safety instructions / protective conductor connection

A protective conductor termination is mandatorily required if the "limits for **TOUCHABLE PARTS**" described in the respective standards are exceeded and no other protective measures against electric shock have been taken. In any case, before commissioning, a check of the protective connection and all **TOUCHABLE PARTS** must be carried out according to the relevant standards.

When mated, the housing listed in this catalog corresponds to the requirements specified in IEC 61984:2008 with regard to protection against contact in accordance with IEC 60529:1989.

When using mounting housings or comparable device parts without complete IP protection in the cable connection area or when using the connectors without housing, the required contact protection according to IEC 61984:2008 must be provided by the customer (e.g. by suitable installation in the control cabinet with IP degree of protection). The customer must ensure strain relief for the cables / strands on the device part.



Suitable modules for ODU-MAC  $^{\! \odot}$  PUSH-LOCK are marked, reversed gender is not possible.


## TABLE OF CONTENTS

PRUDULI INFURMATIUN	<u>5</u>
The ODU-MAC® Blue-Line — universal solution	6
Dos and don'ts	<u>16</u>
Configurator	
The ODU-MAC® Black-Line	
Your hybrid connection	<u>18</u>
Various locking options	<u>19</u>
Housing selection	
ODU-MAC® PUSH-LOCK	22
Information on plastic housings	24
Frames for automatic docking	26
Reliable connections — the contact principle	28
Contact retention with the clip principle (standard)	30
PCB termination modules	
The ODU-MAC® Blue-Line — for various applications	
MANUAL MATING	35
ODU-MAC® PUSH-LOCK	
Spindle locking	
Metal housing	the state of the s
Plastic housing	
Transverse locking, plastic housing.	
Lever locking, metal housing	
Frame for housing	
Accessories	
Coding options	
AUTOMATIC DOCKING	79
Requirements of the complete system	
ODU-MAC® Blue-Line docking frame	
ODU-MAC® Blue-Line strain-relief plate	83
ODU-MAC® Blue-Line strain-relief housing	<u>82</u>
MODULES	
Overview	<u></u>
Signal	
PCB termination modules	<u>10</u> 2
Coax	
Compressed air / fluid / vacuum coupling	
Shielded feedthrough / high-speed connector	<u>122</u>
Fiber optic	<u>132</u>
High-current	<u>138</u>
PE module	
High-voltage	148
Combination modules	
Thermocouples	
Blank modules	
Cable specifications	
TOOLS COIMD INCODMATION DOOCESSING INSTRUCTIONS ACCESSORIES	107
TOOLS, CRIMP INFORMATION, PROCESSING INSTRUCTIONS, ACCESSORIES	<u></u> <u>167</u>
TECHNICAL INFORMATION	177



CONFIGURE THE ODU-MAC® BLUE-LINE EASILY ONLINE AT: <u>WWW.ODU-MAC.COM</u>

ODU-MAC®

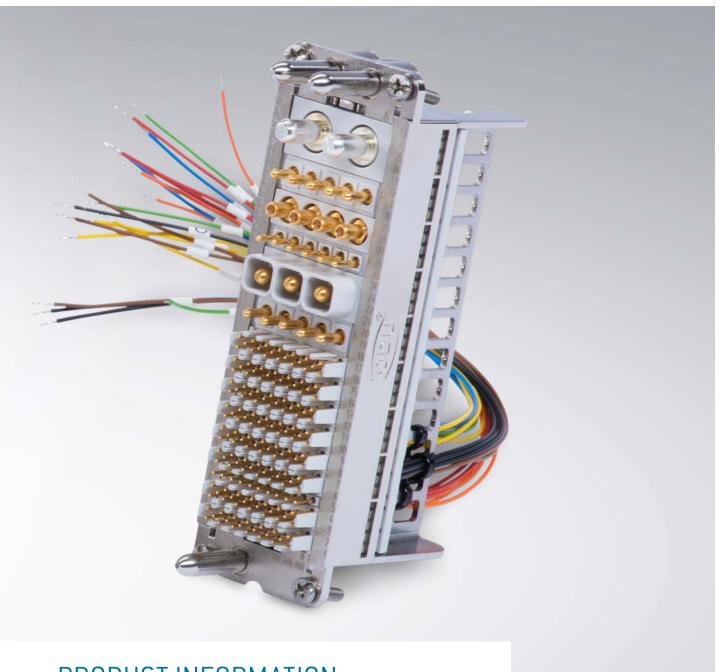

## PRODUCT INFORMATION

The ODU-MAC® Blue-Line — universal solution	<u>6</u>
Dos and don'ts	<u>10</u>
Configurator	<u>14</u>
The ODU-MAC® Black-Line	<u>16</u>
Your hybrid connection	<u>18</u>
Various locking options	<u>19</u>
Housing selection	<u>20</u>
ODU-MAC® PUSH-LOCK	<u>22</u>
Information on plastic housings	24
Frames for automatic docking	<u>26</u>
Reliable connections – the contact principle	<u>28</u>
Contact retention with the clip principle (standard)	<u>30</u>
PCB termination modules	<u>32</u>
The NNIL-MAC® Blue-Line – for various applications	33

# THE ODU-MAC® BLUE-LINE — UNIVERSAL SOLUTION



User friendly

Flexible

# AUTOMATIC DOCKING











#### **FLEXIBLE**

- 5 frame sizes (7, 12, 18, 26, 37 units)
- Transmission of signals, power, high-current, high-voltage, HF signals (coax), compressed air, fluid, vacuum, data, and fiber optic
- Additional option for the transmission of signals: separate PCB termination modules for effective contacting in the termination area
- Very high contact density via the 2.4 mm grid (1 unit)

#### HIGH-PERFORMANCE

- > 10,000 mating cycles
- Up to 370 contacts per single-row connector
- Proven ODU contact technology (turned / slotted contacts and contacts with lamella technology)

## A MODULAR ALL-ROUNDER

The flexible modular design of the ODU-MAC  $^{\circ}$  Blue-Line enables the combination of different transmission types within one connector.

Whether signal, power, high-current, high-voltage, HF signals (coax), compressed air, fluid, data, or fiber optic are being transmitted — all of the contact inserts can be integrated into the individual connector solution. For signal transmission, there is also a simple contacting option using PCB termination modules. The individual parts are supplied loose.

There are various applications possible: from installation with a stable frame into a rack or panel to the integration in one of the many housing versions.





Housing made of plastic or aluminum



**ODU-MAC®** White-Line

Manual connectors for 100,000 mating cycles and more.

ODU-MAC® ODU DOCK Silver-Line

Connectors for docking systems or automatic docking solutions for robots with 10,000 mating cycles and more.

More information: odu-connectors.com/downloads


## THE MODULAR SYSTEM AT A GLANCE 10,000 possible areas of application: manual mating or automatic docking housing wide range of strain-relief plate cable hood versions contacts for solder, crimp, and PCB termination types of locking: spindle, lever, transverse or push-pull locking modules to choose from: signal, power, high-current, high-voltage, HF signals (coax), compressed air, fluid, vacuum, data, fiber optic, thermocouple and PCB termination spindle locking different spindle geometries pin frame Contacts with the clip principle that can be dismantled (see page 30) optional: cable strain relief plate see page 83 socket frame Different versions and sizes of the bulkhead and surface-mounted housings and couplings housing

## DOS AND DON'TS

### SAFETY





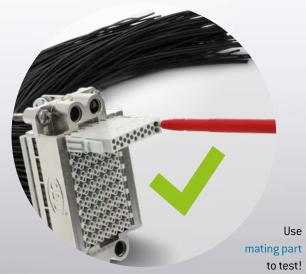

# SELECT THE BEST SUITABLE CABLE OUTLET FOR YOUR INDIVIDUAL SOLUTION!










### **BEST PRACTICE**



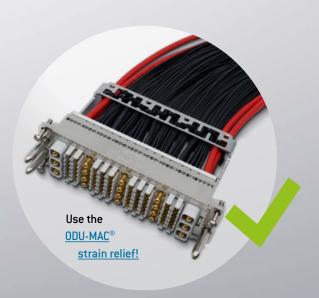

## DOS AND DON'TS

### **BEST PRACTICE**



# SELECT OUT OF A WIDE RANGE OF PRE-ASSEMBLED MODULES AND CONTACTS



### **IDEAS**




Safety measurement solution!



PARKING POSITION



SEVERAL FIRST MATE, LAST BREAK **OPTIONS** 





ORDER ADDITIONAL SPARE PARTS!



## **CONFIGURATOR**

#### Individual configuration of your ODU-MAC® Blue-Line connection

With the Product Finder it's possible to configure your connection simply according to your requirements.

The Product Finder guides you through the different choices step by step and offers many continuative information.

#### CONFIGURE YOUR ODU-MAC® BLUE-LINE HERE:



www.odu-mac.com takes you directly to the Product Finder, allowing you to start to configurate your ODU-MAC® immediately.

#### **SELECT & REQUEST OFFERS**

You will receive a drawing and a detailed offer within one working day of submitting your request.

When placing an order, you will receive a complete article number for the connector. The individual parts are supplied loose.

We ask you to enquire directly about customized versions not covered by the standard.

## **CABLE ASSEMBLY**

In addition to high quality connectors, ODU also offers complete system solutions including cable assembly. The advantage is that you receive the cable harness in an all-in-one solution from a single source. This greatly minimizes effort and installation time.




# THE ODU-MAC® PLack-Line THE MASS INTERCONNECT SOLUTION

with ODU-MAC® Blue-Line modules



More information: odu-interconnect.com



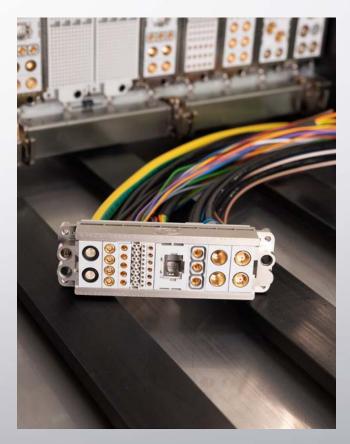

- 🕒 Easy assembly and removal of contacts
- Constantly low transition resistance
- + Flexibility through easy and fast configuration
- Free combination of the different modules
- 🕒 High packing density

## YOUR HYBRID CONNECTION

#### MANUAL MATING

4 TYPES OF LOCKING

First, select your locking type by choosing between spindle, lever, transverse or push-pull locking.

DIFFERENT CONNECTOR HOUSINGS

Then select the plastic or metal housing best suited to your requirements: cable hood, cable hood XXL, cable hood wide, RAPID or PUSH-LOCK housing.

♠ RECEPTACLE SELECTION

Depending on your requirements you choose between **bulkhead mounted housing**, **surface mounted housing**, **cable-to-cable hood**, **PUSH-LOCK receptacles or recessed mounting (RAPID)**.

#### **AUTOMATIC DOCKING**

4 DOCKING FRAMES TO CHOOSE FROM

Size	Units*
1	12
2	18
3	26
4	37

 $\begin{tabular}{lll} \textbf{Tolerance compensation radial:} & \pm 0.6 \ mm \\ \hline \textbf{Tolerance compensation axial:} & min. \ 0.1 \ mm \\ \hline \end{tabular}$ 

\*1 Unit = 2.4 mm



Get your connector ready for use including cable assembly.

## **VARIOUS LOCKING OPTIONS**



### SPINDLE LOCKING

Quick-action locking system with **10,000 locking cycles**. If required, the simple front replacement set (spindle exchange set) enables a simple adjustment of the spindle geometry. The spindle locking is integrated in a module for installation in ODU-MAC® Blue-Line frames for housings.



\*1 Unit = 2.4 mm

# HOUSING SELECTION - PLASTIC

Connecto		ODU-MAC <sup>®</sup> PUSH-LOCK	SH-LOCK					C <sup>®</sup> RAPID	
Lock		Push-Pull	Trans	verse		Spindle		Spir	ndle
Size / Type	Units*								
PUSH-LOCK	7	•	_	-	-	-	-	-	-
1	12	-	•	•	-	-	-	-	-
2	18	-	•	•	•	•	•	•	•
3	26	-	•	•	•	•	•		
4	37	-	•	•	•	•	•	•	•
5	54	-	-	-	-	-	-	-	-
6	74	-	_	-	-	-	-	-	-
Protective co (for connector		•	•	•	•	•	•	•	•
Recep	otacle				900	900			

<sup>\*1</sup> Unit = 2.4 mm

Additional information on <a href="https://vimeo.com/838690063">https://vimeo.com/838690063</a>

# HOUSING SELECTION - METAL

Connecto	or housing													
Loc	king			Lever			Le	ver	Le	ver		Spir	ndle	
Size / Type	Units*													
PUSH-LOCK	7	_	_	-	_	_	_	_	-	-	_	-	-	-
1	12	•	•	•	•	•	_	-	-	_	_	_	_	_
2	18	•	•	•	•	•	_	-	_	-	•	•	•	-
3	26	•	•	•	•	•	_	_	-	_	•	•	•	-
4	37	•	•	•	•	•	•	•	-	-	•	•	•	•
5	54	-	_	_	-	_	_	-	•	•	-	-	-	-
6	74	-	-	-	-	-	-	-	•	•	-	-	-	_
Protective co	over available r & receptacle)	•	•	•	•	•	•	•	only rec	eptacle		only	Gray	
Rece <sub>l</sub>	otacle								550					

<sup>\*1</sup> Unit = 2.4 mm

Additional information on <a href="https://vimeo.com/483607961">https://vimeo.com/483607961</a>

## **ODU-MAC® PUSH-LOCK**

#### Very high contact density for small installation space

The compact, sealed ODU-MAC® PUSH-LOCK housing with push-pull locking is based on the ODU-MAC® Blue-Line.

This hybrid connector is extremly user-friendly and allows easy operation with one hand.


#### BENEFITS OF THE PUSH-LOCK HOUSING

- Proven and secure push-pull locking
- 7 units
- Modules: signal, power, HF signals (coax), compressed air, fluid coupling, data transmission
- > 5,000 mating cycles
- IP67
- M25 cable outlet
- 6 optional coding functions
- Protective cover

FURTHER INFORMATION FROM PAGE 36





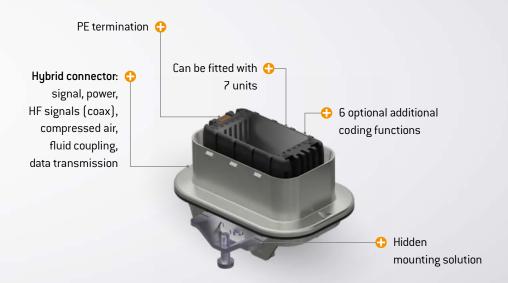



# INFORMATION ON PLASTIC HOUSINGS

Plastic housings are primarily used for applications in which a high degree of chemical resistance is required. The glass-fiber reinforced plastic housing reduces the weight and impresses in mechanical robustness.

The plastic housings of ODU-MAC® Blue-Line either use the proven ODU spindle locking technology with a minimum of 10,000 locking cycles, which has excellent ergonomic features, or the customer can choose the efficient transverse locking version instead. An additional grounding of the plastic housing is unnecessary, due to the antistatic, thermoplastic housing.

Hence manual mating becomes as easy as it is safe.



### CHEMICAL RESISTANCE

Medium	Material PA6 + GF				
	Resistant	With limited resistance			
Ammonia, 10 % aqueous solution	•	-			
Ammonia gas	at room temperature	at 100 °C			
Ammonium carbonate	•	-			
Ammonium chloride	•	-			
Aniline	-	•			
Asphalt	•	-			
Beer	•	_			
Butane gas	•	-			
Cooking salt, aqueous solution	•	-			
Copper sulfate, 10 % aqueous solution	•	-			
Cresol solution	_	•			
Cresylic acid	-	•			
Cyclohexane	•	-			
Diesel	•	-			
Diluted glycerol	•	-			
Diluted glycol	•	-			
Diluted phenol	-	•			
Dioctylphthalate	•	-			
Ethyl alcohol, not denatured	•	-			
Fruit juices	•	-			
Glycerol	•	-			
Heptane	•	-			
Hexane	•	-			
Hydrogen sulfide	gaseous	diluted solution			
Ink	•	-			
Isopropyl + ethanol	•	-			
Isopropyl alcohol	•	-			
Lactic acid	•	-			
Linseed oil	•	-			
Lubricating oil	•	-			
Mercury	•	-			
Methyl alcohol, diluted 50 %	•	-			
Mineral oil	•	-			
Mineral-based oil	•	-			
Moth balls	•	_			
Motor oil	•	-			
n-butanol	•	-			
Naphthalene	•	-			
Octane	•	-			

Medium	Material	PA6 + GF
	Resistant	With limited resistance
Oleic acid	·	—
Paraffin oil		_
Petroleum	•	_
Potassium carbonate	•	_
Potassium chloride		_
Potassium iodide	•	
Potassium nitrate	-	
	·	_
Potassium sulfate	•	_
Regular grade petrol	•	-
Seawater	•	_
Silicone oil	•	> 100 °C
Soap solution	•	-
Sodium bicarbonate	•	-
Sodium bisulfate, aqueous solution	•	-
Sodium carbonate	•	-
Sodium chlorate	•	_
Sodium chloride	•	_
Sodium hydroxide 12.5 %	at room temperature	_
Sodium nitrate	•	_
Sodium nitrite	_	•
Sodium perborate	•	_
Sodium phosphate	•	_
Sodium silicate	•	-
Sodium sulfate	•	-
Sodium sulphide	•	-
Sodium thiosulfate	•	-
Solution for developing photos	•	-
Stearic acid	•	_
Stearic acids	•	_
Sulfur	•	-
Sulfur dioxide	_	•
Tallow	•	-
Tar	•	_
Tartaric acid	•	-
Transformer oil	•	_
Urea, diluted	•	-
Urine	•	_
Vegetable oil	•	_
Water	•	-


This list gives a non-exhaustive indication of the chemical resistance offered by the plastic housing. Please contact the ODU team if you have any further questions. They will be happy to assist you.

# FRAMES FOR AUTOMATIC DOCKING

Depending on your application, you can choose between 4 different sizes and equip the frame with modules.

If your requirements for a connector are not covered by the standard products, we also offer customized solutions.

The ODU-MAC® Blue-Line is designed for 12 to 37 grid units (more on request), meaning that 370 contacts can be installed if the 10-contact module with a module width of 2.4 mm (1 unit) is used.

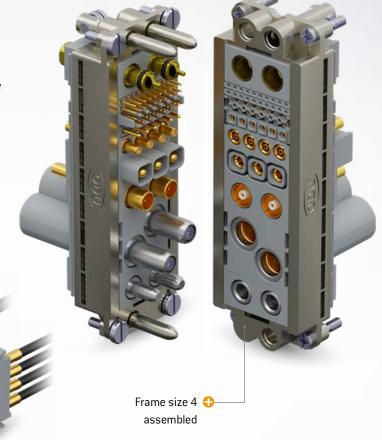

#### BENEFITS OF THE ODU-MAC® BLUE-LINE FRAMES

- User-friendly
   Quick assembly and removal of the modules in the frame without using tools
- Flexible 4 frame sizes (12, 18, 26, 37 units)
- Maximum contact density via the 2.4 mm grid (1 unit)
- High-performance
  - > 10,000 mating cycles Up to 370 contacts per connector

#### PIN FRAMES — FLOATING MOUNTING

The frame is suitable for automatic docking. Tolerance compensation  $\pm\,0.6$  mm radial, min. 0.1 mm axial





FURTHER INFORMATION FROM PAGE 80

# RELIABLE CONNECTIONS — THE CONTACTS

ODU contacts meet the highest quality standards and enable safe and reliable connections. In the turned contact category, we essentially distinguish between lamella and slotted contacts. The socket pieces differ, but the pins are always the same and always solid.

### **ODU TURNTAC®**

#### Contacts in slotted version

The universal ODU TURNTAC® contact system combines the very good contact properties and high quality with economical prices. By means of optimum guidance and assembly in the ODU-MAC® system, the longevity of 10,000 mating cycles and more can be achieved.

The contact principle can even be used in dimensions as tiny as 0.3 mm in diameter. Depending on the version of the slotted contact, the connector system offers two, four, six or more contact areas.



#### **BENEFITS**

- > 10,000 mating cycles
- Economical solution
- · Very small dimensions are possible
- Individual contacts on request


Standard contact principle for:				
Signal / High-voltage contact	Ø 0.7 – 2 mm			
Power contact	Ø 3.5 mm			
Coax	2 and 4 contacts			
Shielded feedthrough	Signal contacts			

## **ODU LAMTAC®**


#### Contacts with lamella technology

The ODU LAMTAC® consists of a turned carrier in which one or several stamped lamella strips are mounted in a fully automated process. The lamella's individual slats make for a multitude of contact points, thereby guaranteeing a high level of contact safety and ease of connecting. The adapted contact force ensures low mating and demating forces, and a long service life with low wear. The mating cycles here are minimum 10,000.

#### UNMATED

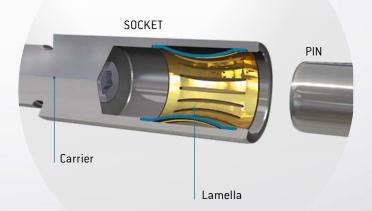



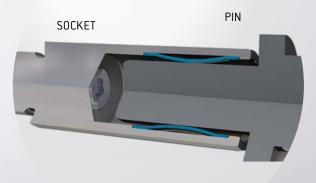

#### **BENEFITS**

- > 10,000 mating cycles
- High current-carrying capacity
- Low contact resistances
- Low mating and demating forces
- High vibration and shock resistance
- Individual contacts on request


Standard contact principle for:				
Power contact	Ø 5 – 12 mm			
Shielded feedthrough	Shielded transmission			
PE	Ø 8 mm			

# CONTACT RETENTION WITH THE CLIP PRINCIPLE (STANDARD)

The graphic below shows how the contact is fixed in the insulator. The contact is pushed from the termination side (rear insertion) into the insulator and locked in by a metal clip (barbed hook) snapping in the insulator. The contacts can be easily removed again from the front at any time with a removal tool.

Compared with permanent connections, crimp technology allows for the replacement of contacts and easy repair. Voltage values can be increased by leaving contact positions free. Contact assembly can be performed independently of the insulator.


Not all modules are equipped with the clip principle, but removal is always possible.

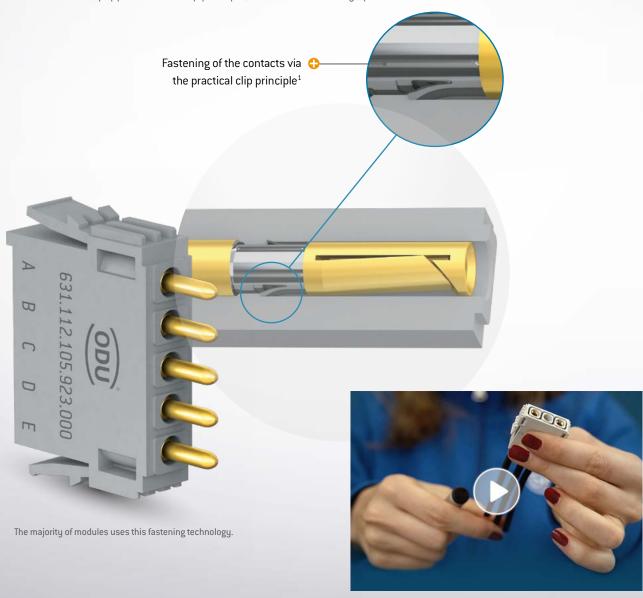


<sup>&</sup>lt;sup>1</sup> After clipping a new contact in three times, the module must be renewed.


# PERFECTLY ASSEMBLED — EASY TO HANDLE

One mechanical and two optical coding functions of the modules simplify the assembly. Modules can be assembled equipped or unequipped (contact assembly is possible at any process step).

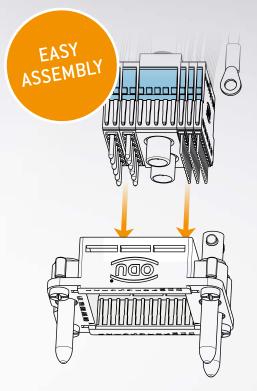


Assembly and fastening of the modules using the clip principle without any tools

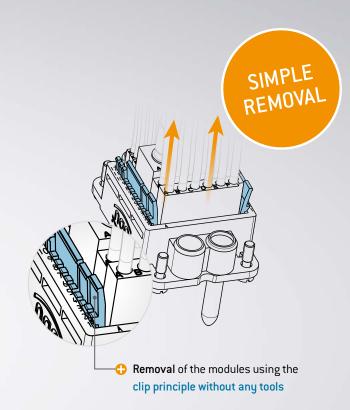

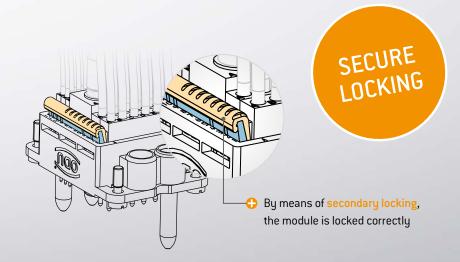

### **PCB TERMINATION MODULES**

Easy-to-use termination technology for signal modules via PCB contacting

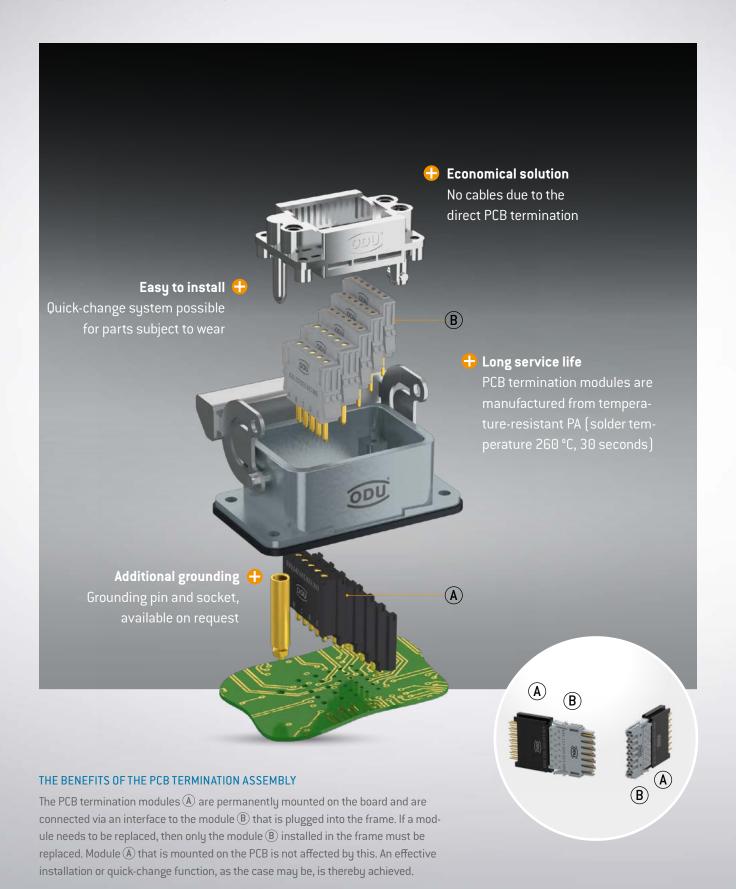

# THE ODU-MAC® BLUE-LINE — FOR VARIOUS APPLICATIONS

#### X-RAY MACHINES

The modular ODU-MAC® connector acts as an interface between a mobile X-ray machine and a monitor cart. It transmits high-current, data, and signals.



#### **AUTOMOTIVE TESTING**

The connection between a battery testing system and electrical cars is made with ODU-MAC® Blue-Line connectors including high-voltage modules.



#### **AUTONOMOUS DISINFECTION ROBOT**

The ODU-MAC® Blue-Line guarantees a secure self-centering connection between the cleaning body and the vehicle.



#### MEASURING AND TESTING TECHNOLOGY

ODU-MAC® Blue-Line customized power and signal transmission solution for a HIL testing system.





# EASILY CONFIGURE THE ODU-MAC® BLUE-LINE ONLINE AT: <u>WWW.ODU-MAC.COM</u>



## MANUAL MATING


ODU-MAC® PUSH-LOCK	36
Spindle locking	<u>40</u>
Metal housing	<u>44</u>
Plastic housing	48
Transverse locking, plastic housing	<u>55</u>
Lever locking, metal housing	<u>60</u>
Frame for housing	<u>68</u>
Accessories	<u>69</u>
Coding options	72

## ODU-MAC® PUSH-LOCK

#### Connector housing for assembly on the cable

#### **PUSH-PULL LOCKING**



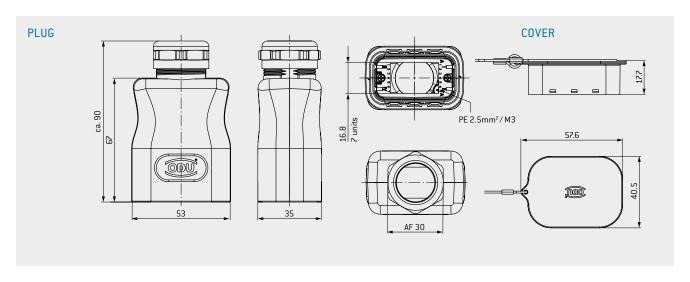

ODU-MAC® PUSH-LOCK	Part number
Cable hood Black	656.564.012.000.000
Cable hood White	656.564.012.000.001
Connector coding set	656.564.002.010.000
Connector protective cover	656.564.020.000.000

Assembly set for cable-Ø (has to be ordered separately)	Color	Part number
7 to 10.5	Green	921.000.006.999.001
7 to 10.5	Gray	921.000.006.999.011
0 . 40	Red	921.000.006.999.002
9 to 13	Gray	921.000.006.999.012
44-40	Blue	921.000.006.999.003
14 to 18	Gray	921.000.006.999.013
17 to 20.5	Brown	921.000.006.999.004
	Gray	921.000.006.999.014

#### TECHNICAL DATA

Color of housing Black (RAL 9005), White (RAL 9003)

Material housing shell Lexan PC (UL 94)

Material Assembly set TPE

Material protective cover Lexan PC

Number of locking cycles 5,000

Units<sup>2</sup> 7
International

Protection class<sup>3</sup> IP67

Operating temperature  $-40\,^{\circ}\text{C}$  to  $+125\,^{\circ}\text{C}$ 

EMC shielding acc. to

IEC 62153-4-3:2013 / -4-4:2015

Cable diameter 7 - 20.5

Coding 6 more mechanical versions as

options




SUITABLE MODULES ARE MARKED, REVERSED GENDER IS NOT ALLOWED.


<sup>1</sup> At maximum mating force for all contacts of 40 N 2 The frame is already permanently integrated and consists of seven units. 3 IEC 60529:1989 (VDE 0470-1:2014-09)

# ODU-MAC® PUSH-LOCK


#### Receptacle for integration in your device

#### PUSH-PULL LOCKING

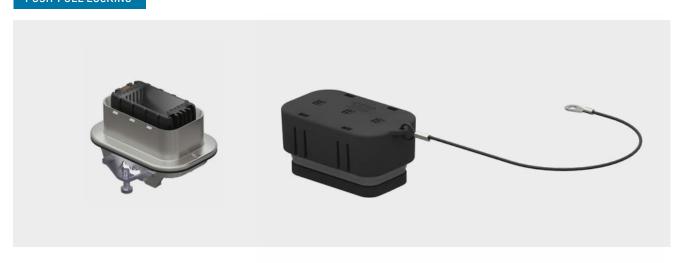

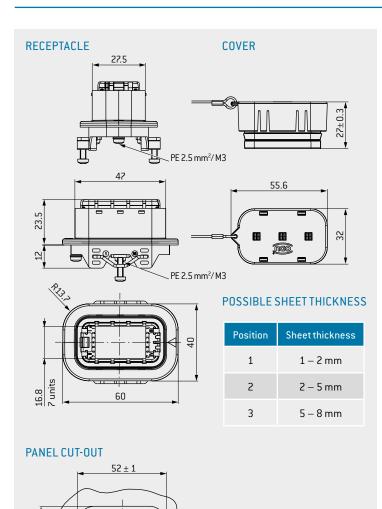

R10

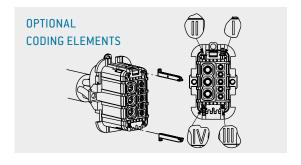

#### TECHNICAL DATA

Material receptacle Zn alloy, nickel-plated Material protective cover Lexan PC
Number of locking cycles¹ 5,000
Units² 7
International Protection class³ IP67
Operating temperature -40 °C to +125 °C

ODU-MAC® PUSH-LOCK	Part number		
Receptacle	656.564.001.000.000		
Receptacle coding set	656.564.001.010.000		
Receptacle protective cover	656.564.010.000.000		


<sup>&</sup>lt;sup>1</sup> At maximum mating force for all contacts at 40 N. <sup>2</sup> The frame is already permanently integrated and consists of seven units. <sup>3</sup> IEC 60529:1989 (VDE 0470-1:2014-09)

# ODU-MAC® PUSH-LOCK

In-Line receptacle for cable to cable assembly Connector housing for assembly on the cable

#### PUSH-PULL LOCKING



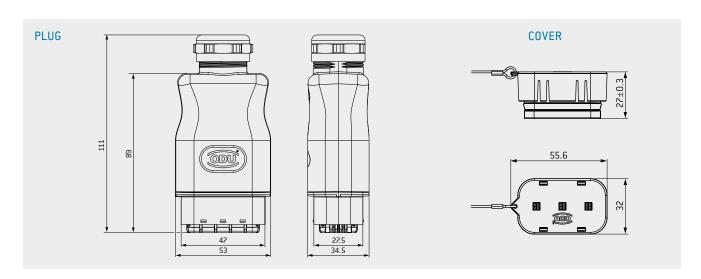

ODU-MAC® PUSH-LOCK	Part number
In-Line receptacle Black	656.564.003.000.001
In-Line receptacle White	on demand
In-Line receptacle coding set	656.564.001.010.000
In-Line receptacle protective cover	656.564.010.000.000

Assembly set for cable-Ø (has to be ordered separately)	Color	Part number
7 to 10.5	Black	921.000.006.999.021
10.5 to 13	Black	921.000.006.999.022
13 to 15.5	Black	921.000.006.999.025
15.5 to 18	Black	921.000.006.999.023
18 to 20.5	Black	921.000.006.999.024

For the Inline-receptacle only the here mentioned silicone sealings are useable.

#### TECHNICAL DATA

Color of housing

Material housing shell

Material assembly set
Material protective cover
Number of locking cycles¹

International

Black (RAL 9005),
White (RAL 9003)

Lexan PC (UL 94)

Silicone
Lexan PC

5,000

5

International

Protection class<sup>3</sup>

Operating temperature  $-40 \, ^{\circ}\text{C}$  to  $+125 \, ^{\circ}\text{C}$ 

EMC shielding acc. to

IEC 62153-4-3:2013/-4-4:2015

Cable diameter 7 - 20.5

Coding 6 more mechanical versions as

IP66

options




SUITABLE MODULES ARE MARKED, REVERSED GENDER IS NOT ALLOWED.


<sup>1</sup> At maximum mating force for all contacts of 40 N 2 The frame is already permanently integrated and consists of seven units. 3 IEC 60529:1989 (VDE 0470-1:2014-09)

# ODU-MAC® PUSH-LOCK

#### Connector housing for assembly on the cable

#### PUSH-PULL LOCKING

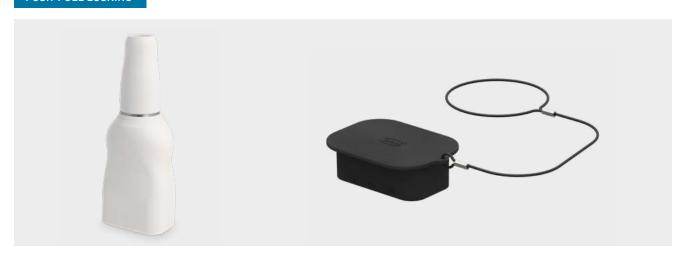

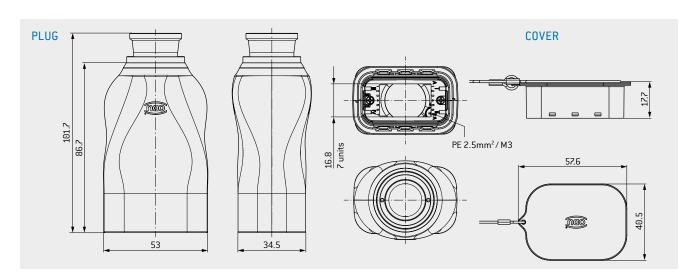

ODU-MAC® PUSH-LOCK MEDICAL	Part number
Cable hood White	656.564.004.000.000
Connector coding set	656.564.002.010.000
Connector protective cover	656.564.020.000.000

Assembly set for cable-Ø (has to be ordered separately)	Color	Part number
7 to 9.5	White	656.564.104.017.945
10 to 13.5	White	656.564.104.016.945
13.5 to 16.5	White	656.564.104.015.945
16.5 to 20.5	White	656.564.104.014.945

#### TECHNICAL DATA

Color of housing White (RAL 9003)

Material housing shell Lexan PC (UL 94)

Material Assembly set TPE (sealing)

Silicone (bend relief)

Material protective cover Lexan PC
Number of locking cycles¹ 5,000
Units² 7
International

Protection class<sup>3</sup> IP67

Operating temperature  $-40\,^{\circ}\text{C}$  to  $+125\,^{\circ}\text{C}$ 

EMC shielding acc. to

IEC 62153-4-3:2013/-4-4:2015

Cable diameter 7 - 20.5

Coding 6 more mechanical versions as

options




SUITABLE MODULES ARE MARKED, REVERSED GENDER IS NOT ALLOWED.

# SPINDLE LOCKING (VERSION 1)

Module for installation in ODU-MAC® Blue-Line frame for housing. Quick-action locking system with over 10,000 locking cycles. Easy replacement of the front (replacement spindle set) enables a simple adjustment of the spindle geometry.

# VERSION 1: FOR SOCKETS IN BULKHEAD OR SURFACE-MOUNTED HOUSING AND PINS IN CABLE HOOD

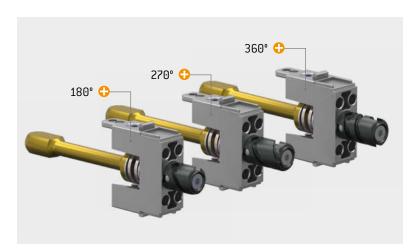


#### **TECHNICAL NOTES**


- Min. 10,000 locking cycles
- Space requirement 5 units  $(5 \times 2.4 \text{ mm})$
- Easy one-hand insertion / connection
- Force benefit by the insertion / connection
- Replaceable spindle screws
- Direct PE contacting (M3 ring cable lug)

Please note the recommended mounting position of the spindle as shown in the table below:

Frame size	Unit range
4	17 – 21
3	11 – 15
2	7 – 11

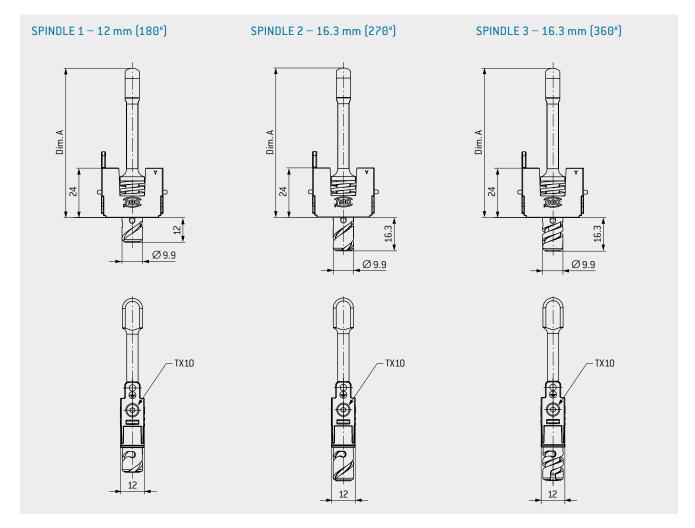



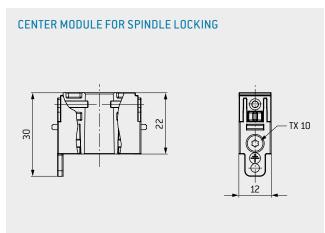

Size	Part number W	ITHOUT CODING	Part number \	Angle of rotation	Dim. A	
	Center module for bulkhead and sur- face-mounted housing and cable-to-cable hood	Spindle locking for cable hood	Center module for bulkhead and sur- face-mounted housing and cable-to-cable hood	Spindle locking for cable hood	rotation	mm
2 (52 mm high)		635.091.003.200.000		635.091.003.200.010	180°	46.5
2 (72 mm high)		635.091.001.200.000	524 000 004 204 040	635.091.001.200.010	180°	66.5
3/4	624 000 004 204 000	635.092.011.200.000		635.092.011.200.010	270°	72.5
3/4	634.090.001.304.000	635.092.011.200.003	634.090.001.304.010	635.092.011.200.013	360°	72.5
XXL/RAPID		635.093.011.200.000		635.093.011.200.010	270°	90.5
XXL/RAPID		635.093.011.200.003		635.093.011.200.013	360°	90.5

#### REPLACEMENT SPINDLE SETS 180°, 270° AND 360°



Part number replacement spindle set	Angle of rotation	Dimension mm		
615.090.104.249.000	180°	12		
615.090.104.249.004	270°	16.3		
615.090.104.249.005	360°	16.3		

Depending on the application, a simple adjustment of the spindle geometry is possible using the replacement spindle set.


#### FOR THE REQUIRED ASSEMBLY AIDS, SEE PAGE $\underline{172}$

 $<sup>^{1}</sup>$  Coding pins are included in the standard scope of delivery. For an explanation of spindle coding, see from page  $\overline{^{22}}$ 

# SPINDLE LOCKING (VERSION 2)

Module for installation in ODU-MAC<sup>®</sup> Blue-Line frame for housing. Quick-action locking system with over 10,000 locking cycles. Easy replacement of the front (replacement spindle set) enables a simple adjustment of the spindle geometry.

# VERSION 2: FOR PINS IN BULKHEAD OR SURFACE-MOUNTED HOUSING AND SOCKETS IN CABLE HOOD (REVERSED GENDER)

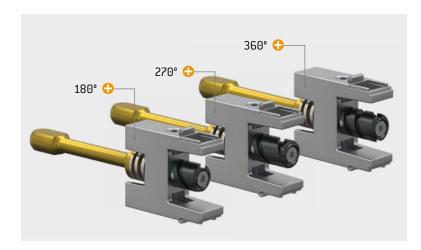


#### **TECHNICAL NOTES**


- Min. 10,000 locking cycles
- Space requirement 5 units  $(5 \times 2.4 \text{ mm})$
- Easy one-hand insertion / connection
- Force benefit by the insertion / connection
- Replaceable spindle screws

Please note the recommended mounting position of the spindle as shown in the table below:

Frame size	Unit range
4	17 – 21
3	11 – 15
2	7 – 11

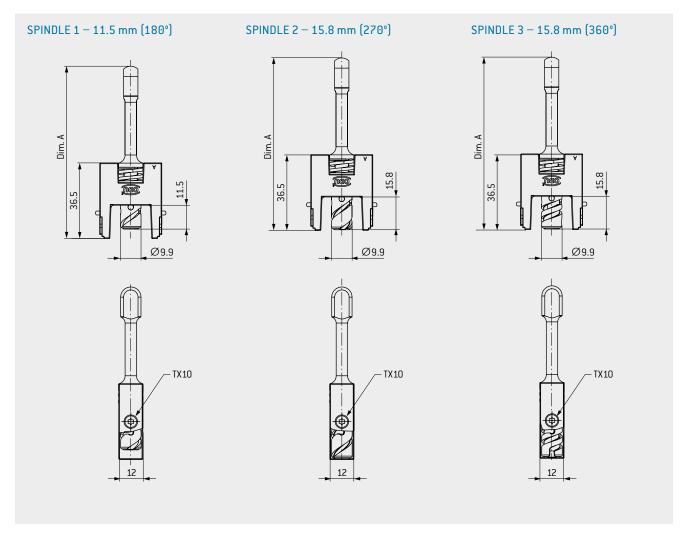



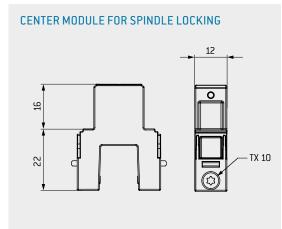

Size	Part number WITHOUT CODING		Angle of rotation	Dim. A
	Center module for bulkhead and surface-mounted housing and cable-to-cable hood	Spindle locking for cable hood		mm
2 (52 mm high)	634.090.002.304.000	635.091.004.200.000	180°	63.5
2 (72 mm high)		635.091.002.200.000	180°	83
3/4		635.092.012.200.000	270°	89.1
3/4		635.092.012.200.003	360°	89.1
XXL		635.093.012.200.000	270°	107.1
XXL		635.093.012.200.003	360°	107.1

#### REPLACEMENT SPINDLE SETS 180°, 270° AND 360°



Part number replacement spindle set	Angle of rotation	Dimension mm
615.090.104.249.000	180°	12
615.090.104.249.004	270°	16.3
615.090.104.249.005	360°	16.3


Depending on the application, a simple adjustment of the spindle geometry is possible using the replacement spindle set.

# METAL CABLE HOOD

#### Connector housing for assembly on the cable with side cable outlet

#### SPINDLE LOCKING



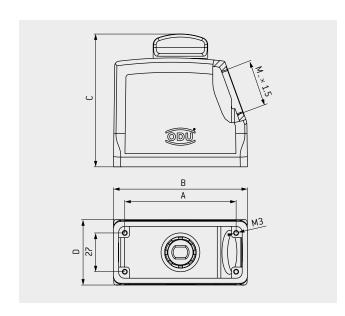

#### **TECHNICAL DATA**

Color of housing

Material International Protection class<sup>1</sup> Operating temperature Cable clamp Number of locking cycles

Adapter

Gray (standard, similar to RAL 7001) or White (similar to RAL 9010) Aluminum die casting

IP50 or IP65 -40 °C to +125 °C see page <u>69</u> see from page 40 for PG clamp see page 70

Size	IP	Part number A Color of housing gray spindle knob black	Part number B Color of housing white spindle knob white	Part number C Color of housing white spindle knob black	Dim. A mm	Dim. B <sub>mm</sub>	Dim. C <sub>mm</sub>	Dim. D mm	Dim. M Cable outlet	Part number Protective cover gray (see page <u>67</u> )
	50	613.091.513.644.208	613.091.513.653.203	-	57	73	52	43	M25	
2	50	613.091.514.644.208	613.091.514.653.203	613.091.514.653.208	57	73	90	43	M32	491.097.613.644.001
	65	613.091.574.644.008	-	-	57	73	90	43	M3Z	
	50	613.092.514.644.208	613.092.514.653.203	613.092.514.653.208	77.5	93.3	93	45.5	M32	
3	50	613.092.515.644.008	613.092.515.653.003	-	77.5	93.3	94	45.5	M40	492.097.613.644.001
	65	613.092.574.644.008	-	-	77.5	93.3	94	45.5	M32	
	50	613.093.514.644.208	613.093.514.653.203	613.093.514.653.208	104	120	93	45.5	M32	
4	טכ	On request	On request	613.093.515.653.008	104	120	94	45.5	M40	493.097.613.644.001
4	65	613.093.574.644.008	-	-	104	120	94	45.5	M32	493.097.013.044.001
	05	613.093.575.644.008	-	-	104	120	94	45.5	M40	


 $<sup>^1</sup>$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) and spindle knob used)

# METAL CABLE HOOD XXL

Connector housing for assembly on the cable with expanded assembly space and side M50 cable outlet

#### SPINDLE LOCKING



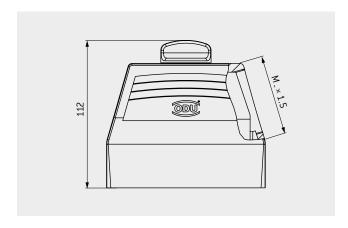

#### TECHNICAL DATA

Color of housing

Material International


Protection class<sup>1</sup>
Operating temperature
Cable clamp

Number of locking cycles

Gray (similar to RAL 7001)

White on request Aluminum die casting

IP50 or IP65 -40 °C to +125 °C see page <u>69</u> see from page 40

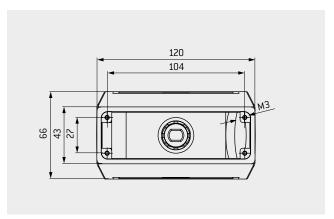

Size	IP	Part number	Dim. M	Part number protective cover
		Color of housing gray / spindle knob black	Cable outlet	(see page <u>67</u> )
4	50	613.093.516.644.208	M50	493.097.613.644.001
4	65	613.093.576.644.008	M50	493.097.613.644.001

 $<sup>^1</sup>$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) and spindle knob used)


# METAL BULKHEAD HOUSING

#### For mounting on your device

#### SPINDLE LOCKING





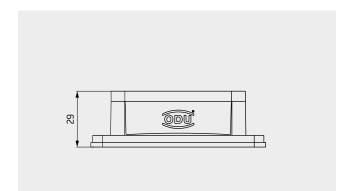

#### TECHNICAL DATA

Color of housing Gray (standard, similar to RAL 7001)

or White (similar to RAL 9010) Aluminum die casting

Material Aluminum die ca International


Protection class<sup>1</sup> IP


Operating

temperature  $-40\,^{\circ}\text{C}$  to  $+125\,^{\circ}\text{C}$  (short duration)  $-40\,^{\circ}\text{C}$  to  $+85\,^{\circ}\text{C}$  (continuous)

NDD and in a make sind

Sealing NBR; sealing material

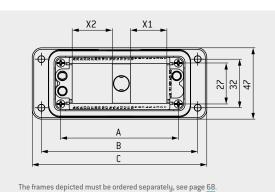



Size	Part number A	Part number B	Dim. A	Dim. B	Dim. C	Dim. D Panel cut-out	X1	Х2
	Color of housing gray	Color of housing white	mm	mm	mm	mm	Units × 2.4 mm	Units × 2.4 mm
2	612.091.010.644.000	612.091.010.653.000	57	83	95	65.2	6	7
3	612.092.010.644.000	612.092.010.653.000	77.5	103	115	85.5	10	11
4	612.093.010.644.000	612.093.010.653.000	104	130	143	112.2	16	16

 $<sup>^{\</sup>rm 1}$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable hood with spindle locking used)

# METAL SURFACE-MOUNTED HOUSING

For surface mounting on your device / wall with two side cable outlets

#### SPINDLE LOCKING





# **ODU**

#### **TECHNICAL DATA**

Color of housing

Material International Protection class<sup>1</sup> Operating temperature

Sealing Cable clamp Adapter

Gray (standard, similar to RAL 7001)

White on request Aluminum die casting

-40 °C to +125 °C (short duration) -40 °C to +85 °C (continuous) NBR; sealing material

see page 69

for PG clamp see page 70

X2 X1
<del> </del>
<b> </b>
The frames depicted must be ordered separately, see page $\underline{68}.$

Size	Part number A	Part number B	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	X1	Х2	Dim. M
	Color of housing gray	Color of housing white	mm	mm	mm	mm	mm	Units × 2.4 mm	Units × 2.4 mm	Cable outlet
2	612.091.025.644.102	612.091.025.653.102	57	82	92.5	74	55.5	6	7	M32
3	612.092.025.644.102	612.092.025.653.102	77.5	105	117	84	56.5	10	11	M32
4	612.093.025.644.102	612.093.025.653.102			4.4.4					M32
4	612.093.026.644.000	-	104	132	144	84	57.5	16	16	M40


 $<sup>^1</sup>$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) and cable hood with spindle locking used)

### ODU-MAC® RAPID PLASTIC HOUSING

Half-shell principle with individually adjustable side cable outlet

#### **SPINDLE LOCKING**



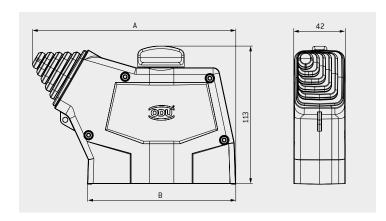

#### TECHNICAL DATA

Color of housing

Material International Protection class<sup>1</sup> Operating temperature

Number of locking cycles
Coding

Black (RAL 9005), White (RAL 9003) Plastic Lexan PC, UL 94-V0

-40 °C to +125 °C Silicone (RAL 7035), UL 94-V0 see from page 40

Spindle coding (6 options) see page 72

Part number Color Cable outlet  $\square$ Part number Dim. A Dim.B Size Description of housing protective cover mm mm 656.561.012.023.000 2 656.561.012.003.000 **RAPID** housing White 139.0 75.1 656.561.012.008.000 656.561.012.018.000 **RAPID** housing Black Max.  $26 \times 37 \, mm$ 656.563.012.003.000 **RAPID** housing White 656.563.012.023.000 4 165.7 121.0 656.563.012.018.000 656.563.012.008.000 **RAPID** housing Black Spindle locking 270° 635.093.011.200.000 2/4 without coding Spindle locking 270° 2/4 635.093.011.200.010 with coding Spindle locking 360° 635.093.011.200.003 2/4 without coding Spindle locking 360° 635.093.011.200.013 2/4 with coding 2 631.191.000.600.001 Housing frame, pin side 4 631.193.000.600.001 Housing frame, pin side 2 631.191.000.600.009 Special frame with 180° rotation 631.193.000.600.009 Special frame with 180° rotation

<sup>&</sup>lt;sup>1</sup> IEC 60529:1989 (VDE 0470-1:2014-09)

# STRAIN RELIEF SET

For ODU-MAC® RAPID housing, the option for bundling and additional strain relief of single strands





#### TECHNICAL DATA

Material Stainless steel Operating temperature  $-40 \,^{\circ}\text{C}$  to  $+125 \,^{\circ}\text{C}$ 


Size	Part number	Included accessories				
2	656.561.002.050.000	$1 \times \text{strain-relief plate including fastening screws}$ $2 \times \text{S3} \times 13.5 \text{ TX10}$				
4	656.563.002.050.000	2 x strain-relief plate including fastening screws 4 x S3 x 13.5 TX10				

# ODU-MAC® RAPID RECEPTACLE

For mounting on your device

#### SPINDLE LOCKING



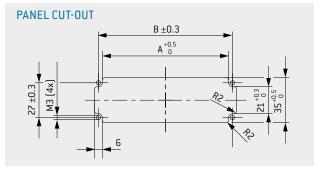

Size	Part number	Description	Dim. A mm	Dim. B mm
2	630.191.000.600.000	Frame	51	57
4	630.193.000.600.000	Frame	98	104
2/4	634.090.001.304.000	Center module v	vithout co	oding
2/4	634.090.001.304.010	Center module v	vith codin	ıg

# ODU-MAC® RAPID RECEPTACLE

#### For mounting as a recessed plastic version

#### SPINDLE LOCKING





#### **TECHNICAL DATA**


Color of housing (recessed style) Material Operating temperature International Protection class<sup>1</sup> Black (RAL 9005), White (RAL 9003)

Plastic Lexan PC, UL 94-V0  $-40\,^{\circ}\text{C}$  to  $+125\,^{\circ}\text{C}$ 

IP4X

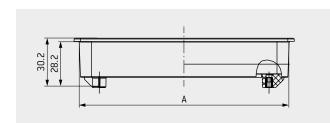

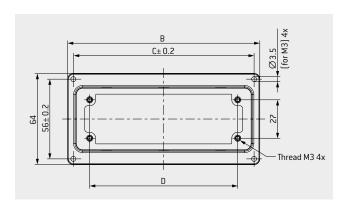

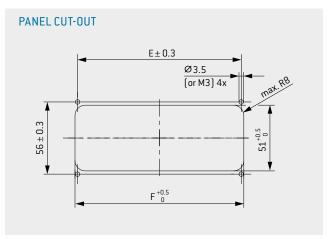

Size	Part number	Description	Color of housing	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm
2	656.561.001.003.000	Receptacle	White	82.4	88	80	57	80	84
2	656.561.001.008.000	Receptacle	Black	82.4	88	80	57	80	84
4	656.563.001.003.000	Receptacle	White	129.4	134.9	127.2	104	127	131
4	656.563.001.008.000	Receptacle	Black	129.4	134.9	127.2	104	127	131
2	630.191.000.600.000	Frame	-	-	-	-	-	-	-
4	630.193.000.600.000	Frame	-	-	-	-	-	-	-
2/4	634.090.001.304.000	Center module without coding	-	-	-	-	-	-	-
2/4	634.090.001.304.010	Center module with coding	-	-	-	-	-	-	-

 $<sup>^{\</sup>scriptscriptstyle 1}\,\text{IEC}\,60529{:}1989$  (VDE 0470-1:2014-09)

# PLASTIC PROTECTIVE COVER


#### For ODU-MAC® RAPID housing and recessed version receptacle


#### HOUSING



#### RECESSED-STYLE RECEPTACLE



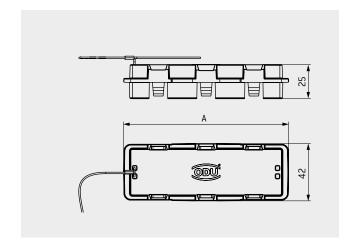

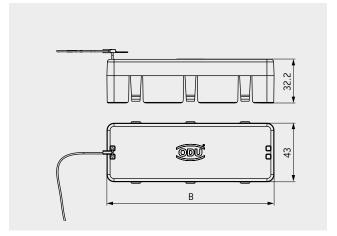

#### **TECHNICAL DATA**

Color of housing Black (RAL 9005), White (RAL 9003)
Material Plastic Lexan PC, UL 94-V0

Operating temperature -40 °C to +125 °C

Protection class<sup>1</sup> IP2X

Size	Color	Part number protective cover for housing	Part number protective cover for recessed version receptacle	Lanyard length housing	Lanyard length recessed ver- sion receptacle	Dim. A	Dim. B
				mm	mm	mm	mm
2	White	656.561.012.023.000	656.561.011.023.000			74	75.5
2	Black	656.561.012.018.000	656.561.011.018.000	300	150		
4	White	656.563.012.023.000	656.563.011.023.000	300	130	121	122 F
4	Black	656.563.012.018.000	656.563.011.018.000				122.5


<sup>&</sup>lt;sup>1</sup> DIN EN 60529:2014-09

# PLASTIC CABLE HOOD

Plastic cable hood for assembly on the cable with side cable outlet

#### SPINDLE LOCKING



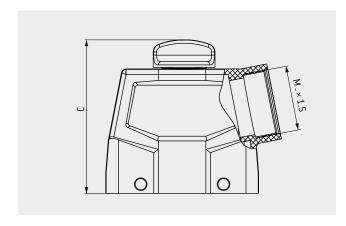


#### TECHNICAL DATA

Color of housing Black (RAL 9005)
Material Plastic PA6 GF, UL 94-V0

International

Protection class<sup>1</sup> IP5

 $\begin{array}{ccc} & & \text{IP65 on request} \\ \text{Operating temperature} & -40 \, ^{\circ}\text{C to} + 125 \, ^{\circ}\text{C} \\ \text{Cable clamp} & \text{see page } \underline{69} \\ \text{Number of locking cycles} & \text{see from page } \underline{40} \end{array}$ 

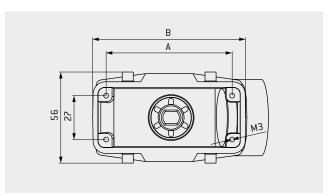

Size	Part number	Dim. A	Dim. B	Dim. C	Dim. M	Part number protective cover
		mm	mm	mm	Cable outlet	(see page <u>59</u> )
2	613.091.514.908.308	57	74	90	M32	491.097.613.908.001
3	613.092.514.908.308	77.5	94	94	M40	492.097.613.908.001
4	613.093.514.908.308	104	121	94	M40	493.097.613.908.001

#### FOR A REDUCTION FROM M40 TO M32, SEE PAGE 69


 $<sup>^{\</sup>rm 1}$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) and spindle knob used)

# PLASTIC BULKHEAD HOUSING

For mounting on your device with spindle locking

#### SPINDLE LOCKING



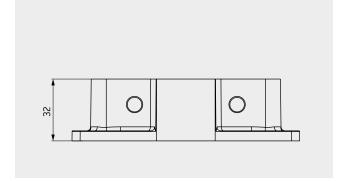

#### TECHNICAL DATA

Color of housing Black (RAL 9005)
Material Plastic PA6 GF, UL 94-V0


International


Protection class<sup>1</sup> IP50 IP65 on request

Operating temperature

Sealing

-40 °C to +125 °C NBR; sealing material

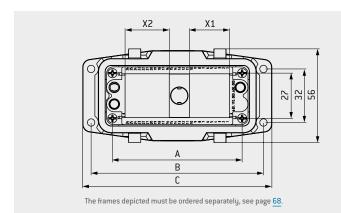

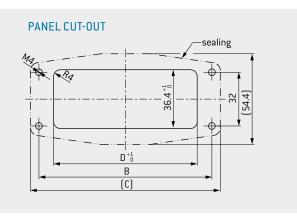

Size	Part number	Dim. A	Dim. B	Dim. C	Dim. D Panel cut-out mm	X1 Units × 2.4 mm	X2 Units × 2.4 mm	Part number protective cover
2	612.091.010.908.000	57	83	93	67	6	7	491.097.612.908.001
3	612.092.010.908.000	77.5	103	114	87	10	11	492.097.612.908.001
4	612.093.010.908.000	104	130	140	114	16	16	493.097.612.908.001


 $<sup>^{\</sup>rm 1}$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable hood with spindle locking used)

# PLASTIC SURFACE-MOUNTED HOUSING

For surface mounting on your device / wall with two side cable outlets

#### SPINDLE LOCKING



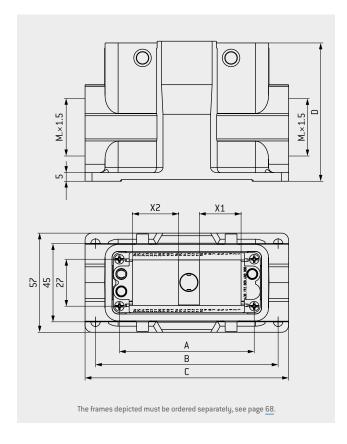

#### **TECHNICAL DATA**

Color of housing
Material
International
Protection class¹
Operating temperature
Sealing
Cable clamp

Black (RAL 9005) Plastic PA6 GF, UL 94-V0

IP50 / IP65  $-40\,^{\circ}\text{C to} + 125\,^{\circ}\text{C}$  NBR; sealing material see page  $\underline{69}$ 

Size	Part number	Dim. A	Dim. B	Dim. C	Dim. D	D X1 X2		Dim. M	Part number protective cover
		mm	mm	mm	mm	Units × 2.4 mm	Units × 2.4 mm	Cable outlet	(see page <u>58</u> )
2	612.091.020.908.000	57	82	94	82	6	7	M32	491.097.612.908.001
3	612.092.020.908.000	77.5	105	117	82	10	11	M40	492.097.612.908.001
4	612.093.020.908.000	104	132	144	82	16	16	M40	493.097.612.908.001

#### FOR A REDUCTION FROM M40 TO M32, SEE PAGE 69

 $<sup>^1</sup>$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) and cable hood with spindle locking used)

# PLASTIC CABLE HOOD


Plastic cable hood for assembly on the cable with side cable outlet

#### TRANSVERSE LOCKING





# 

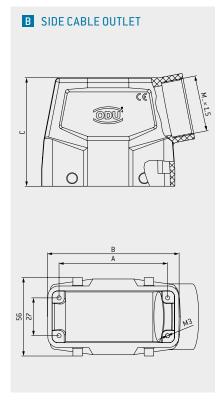

#### TECHNICAL DATA

Color of housing Black (RAL 9005)
Material Plastic PA6 GF, UL
94-V0
International

Protection class  $^1$  IP65 Operating temperature  $-40\,^{\circ}\text{C}$  to  $+125\,^{\circ}\text{C}$ 

Cable clamp see page <u>69</u>
Number of locking cycles 5,000

Size	Part number with side cable outlet	Part number with top cable outlet	Dim. A	Dim. B	Dim. C	Dim. M	Part number protective cover
	With side casic datiet	with top cable outlet	mm	mm	mm	Cable outlet	(see page <u>59</u> )
1	490.420.650.908.000	490.220.650.908.000	44	61	72.5	M32	490.097.613.908.001
2	491.420.650.908.000	491.220.650.908.000	57	74	72.5	M32	491.097.613.908.001
3	492.420.650.908.000	492.220.650.908.000	77.5	94	76.5	M40	492.097.613.908.001
4	493.420.650.908.000	493.220.650.908.000	104	121	76.5	M40	493.097.613.908.001

#### FOR A REDUCTION FROM M40 TO M32 AND FROM M32 TO M25, SEE PAGE 69


<sup>&</sup>lt;sup>1</sup> IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) used)

# PLASTIC BULKHEAD HOUSING

For assembly on your device with transverse locking

#### TRANSVERSE LOCKING



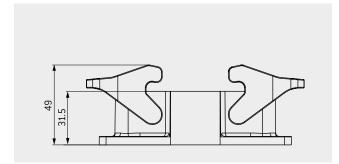



#### TECHNICAL DATA

Color of housing Black (RAL 9005)
Material Plastic PA6 GF, UL 94-V0
International

Protection class<sup>1</sup> IF

 $\begin{array}{ll} \mbox{Operating temperature} & -40\ ^{\circ}\mbox{C to } +125\ ^{\circ}\mbox{C} \\ \mbox{Sealing} & \mbox{NBR; sealing material} \end{array}$ 

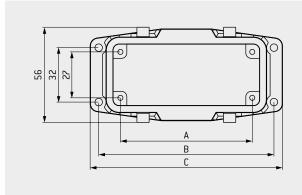

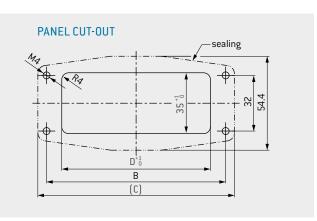

Size	Part number	Dim. A	Dim. B	Dim. C	Dim. D Panel cut-out	Part number protective cover
		mm	mm	mm	mm	(see page <u>58</u> )
1	490.120.600.908.000	44	70	80	53	490.097.612.908.000
2	491.120.600.908.000	57	83	93.2	66	491.097.612.908.000
3	492.120.600.908.000	77.5	103	113	86	492.097.612.908.000
4	493.120.600.908.000	104	130	140	113	493.097.612.908.000


 $<sup>^{1}</sup>$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable hood used)

# PLASTIC SURFACE-MOUNTED HOUSING

For surface mounting on your device / wall with two side cable outlets

#### TRANSVERSE LOCKING



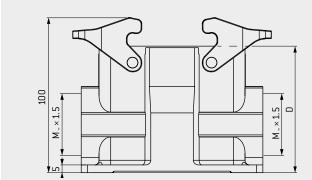


#### **TECHNICAL DATA**

Color of housing Material International Protection class<sup>1</sup> Operating temperature Sealing Cable clamp

Black (RAL 9005) Plastic PA6 GF, UL 94-V0

-40 °C to +125 °C NBR; sealing material see page 69

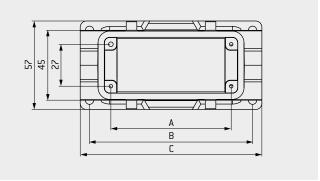

Size	Part number	Dim. A	Dim. B	Dim. C	Dim. D	Dim. M	Part number protective cover
		mm	mm	mm	mm	Cable outlet	(see page <u>58</u> )
1	490.120.650.908.000	44	70	82	74.7	M32	490.097.612.908.000
2	491.120.650.908.000	57	82	94	81.5	M32	491.097.612.908.000
3	492.120.650.908.000	77.5	105	117	81.5	M40	492.097.612.908.000
4	493.120.650.908.000	104	132	144	81.5	M40	493.097.612.908.000

#### FOR A REDUCTION FROM M40 TO M32 AND FROM M32 TO M25, SEE PAGE 69

<sup>&</sup>lt;sup>1</sup> IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) and cable hood used)

# PLASTIC PROTECTIVE COVER

#### For bulkhead and surface-mounted housing with lanyard

SPINDLE LOCKING

Α




TRANSVERSE LOCKING

В



#### SPINDLE AND TRANSVERSE LOCKING

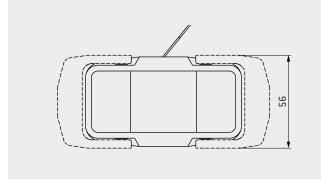

#### TECHNICAL DATA

Color of housing Material


International Protection class<sup>1</sup>

Operating temperature

Black (RAL 9005) Plastic PA6 GF, UL 94-V0

IP65

-40 °C to +125 °C

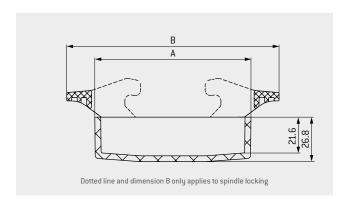

Size	Part number A Protective cover for spindle locking	Part number B Protective cover for transverse locking	Dim. A	Dim. B
	•	, and the second se	mm	mm
1	-	490.097.612.908.000	61	95
2	491.097.612.908.001	491.097.612.908.000	74	108
3	492.097.612.908.001	492.097.612.908.000	94	128
4	493.097.612.908.001	493.097.612.908.000	121	155

<sup>&</sup>lt;sup>1</sup> IEC 60529:1989 (VDE 0470-1:2014-09)


# PLASTIC PROTECTIVE COVER

#### For cable hood with lanyard

#### SPINDLE AND TRANSVERSE LOCKING




#### SPINDLE AND TRANSVERSE LOCKING

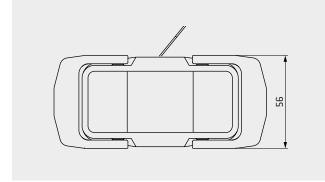

#### TECHNICAL DATA

Color of housing Material International Protection class<sup>1</sup> Operating temperature Sealing Locking Black (RAL 9005) Plastic PA6 GF, UL 94-V0

IP65 -40 °C to +125 °C NBR; sealing material via the transverse locking included in the delivery

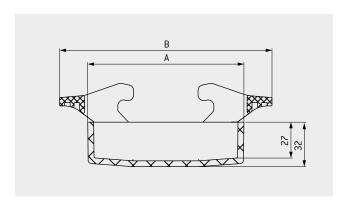

Size	Part number Protective cover for spindle locking	Part number Protective cover for transverse locking	Dim. A	Dim. B
		•	mm	mm
1	-	490.097.613.908.001	61	95
2	491.097.613.908.001	491.097.613.908.001	74	108
3	492.097.613.908.001	492.097.613.908.001	94	128
4	493.097.613.908.001	493.097.613.908.001	121	155

<sup>&</sup>lt;sup>1</sup> IEC 60529:1989 (VDE 0470-1:2014-09)


# METAL CABLE HOOD


#### Connector housing for assembly on the cable with top and side cable outlet

#### LEVER LOCKING





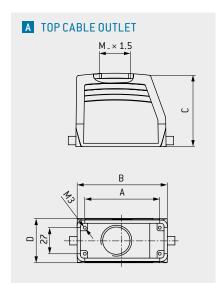

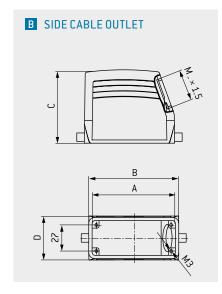

#### **TECHNICAL DATA**

Color of housing Gray (standard similar to RAL 7001) Material Aluminum die casting

International Protection class<sup>1</sup>

in mated condition -40 °C to +125 °C Operating temperature Cable clamp see page 69 for PG clamp Adapter

see page <u>70</u>

With lever locking, a minimum of 5,000 locking cycles are possible with lubrication. Up to 500 mating cycles, no lubrication is required.

Size	Part number A	Part number B	Dim. A	Dim. B	Dim. C	Dim. D	Dim. M Cable	Part number protective cover
	Top cable outlet	Side cable outlet	mm	mm	mm	mm	outlet	(see from page <u>50</u> )
1	490.214.450.644.102	490.414.450.644.102	44	60	52	43	M25	490.097.700.921.002
1	490.215.450.644.102	490.415.450.644.102	44	00	72	43	M32	430.031.1 00.321.002
2	491.214.450.644.102	491.414.450.644.102	57	73	52	43	M25	491.097.700.921.002
۷	491.215.450.644.102	491.415.450.644.102	ər	7.3	72	43	M32	491.097.700.921.002
3	492.215.450.644.102	492.415.450.644.102	77.5	93.5	76	45.5	M32	492.097.700.921.002
3	492.216.550.644.000	-	77.5	93.5	76	45.5	M40	492.097.700.921.002
4	493.215.450.644.102	493.415.450.644.102	104	120	76	4F F	M32	402 007 700 024 002
4	493.217.550.644.000	493.417.550.644.000	104	120	76	45.5	M40	493.097.700.921.002

 $<sup>^{\</sup>rm 1}\,\text{IEC}$  60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) used)

# METAL CABLE HOOD XXL


Connector housing for assembly on the cable with expanded assembly space and side and top M50 cable outlet  $\,$ 

#### LEVER LOCKING





# TOP CABLE OUTLET M.×1.5 120 104

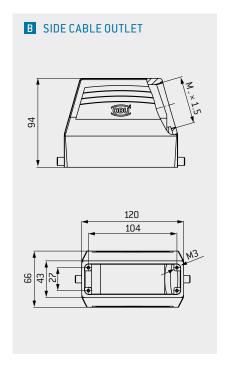

#### TECHNICAL DATA

Color of housing Gray (standard similar to RAL 7001)

Material Aluminum die casting

International

Protection class<sup>1</sup>

 $\begin{array}{c} \text{in mated condition} \\ \text{Operating temperature} & -40\,^{\circ}\text{C to} + 125\,^{\circ}\text{C} \end{array}$ 

Cable clamp see page 69

With lever locking, a minimum of 5,000 locking cycles are possible with lubrication. Up to 500 mating cycles, no lubrication is required.

Size	Part number A	Part number B	Dim. M	Part number protective cover
	Top cable outlet	Side cable outlet	Cable outlet	(see from page <u>50</u> )
4	493.218.550.644.000	493.419.550.644.000	M50	493.097.214.644.000

<sup>&</sup>lt;sup>1</sup> IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) used)


# METAL BULKHEAD HOUSING


#### For mounting on your device


#### LEVER LOCKING









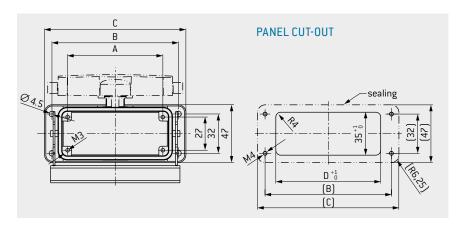

#### **TECHNICAL DATA**

Color of housing Gray (standard

similar to RAL 7001) Aluminum die casting

Material International

Protection class<sup>1</sup> IP65

 $\begin{array}{c} \text{in mated condition} \\ \text{Operating temperature} & -40\,^{\circ}\text{C to} + 125\,^{\circ}\text{C} \end{array}$ 

(short duration) -40 °C to +85 °C

(continuous)

Sealing NBR; sealing material

With lever locking, a minimum of 5,000 locking cycles are possible with lubrication. Up to 500 mating cycles, no lubrication is required.

Size	Part number A	Part number B	Dim. A	Dim. B	Dim. C	Dim. D Panel cut-out	Dim. E
	Without protective cover	With protective cover	mm	mm	mm	mm	mm
1	490.130.400.644.000	490.131.400.644.000	44	70	82	52.2	≈ 22
2	491.130.400.644.000	491.131.400.644.000	57	83	95	65.2	≈ 27
3	492.130.400.644.000	492.131.400.644.000	77.5	103	115	85.5	≈ 28
4	493.130.400.644.000	493.131.400.644.000	104	130	143	112.2	≈ 28

<sup>&</sup>lt;sup>1</sup> IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable hood used)


# METAL SURFACE-MOUNTED HOUSING


For surface mounting on your device / wall with two side cable outlets

#### LEVER LOCKING









#### **TECHNICAL DATA**

Color of housing Gray (standard similar to RAL 7001)

Material Aluminum die casting International

Protection class<sup>1</sup> IP6

in mated condition

Operating temperature -40 °C to +125 °C

(short duration) -40 °C to +85 °C (continuous)

Sealing NBR; sealing material

Adapter for PG clamp

see page 70

With lever locking, a minimum of 5,000 locking cycles are possible with lubrication. Up to 500 mating cycles, no lubrication is required.

Ø 5,5 B	
A A	
22	

Size	Part number A	Part number B	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. M
	Without protective cover	With protective cover	mm	Cable outlet						
1	490.133.450.644.102	490.135.450.644.102	44	70	82	74	≈ 17	55.5	20	
2	491.133.450.644.102	491.135.450.644.102	57	82	92.5	74	≈ 23	55.5	20	1400
3	492.133.450.644.102	492.135.450.644.102	77.5	105	117	84	≈ 23	56.5	20	M32
4	493.133.450.644.102	493.135.450.644.102	104	132	144	84	≈ 22	58	19	

#### M40 CABLE OUTLET AVAILABLE ON REQUEST

 $<sup>^{1}</sup>$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) and cable hood used)


# METAL CABLE HOOD WIDE


#### With top and side cable outlet for double frame assembly

#### LEVER LOCKING





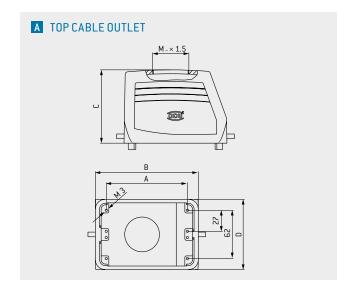

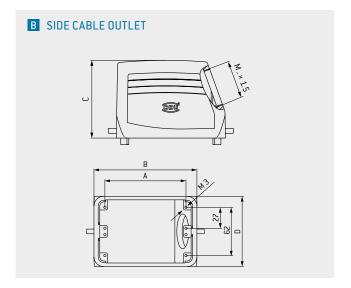

#### **TECHNICAL DATA**

Color of housing Gray (standard similar to RAL 7001)

 $\begin{array}{ll} \mbox{Material} & \mbox{Aluminum die casting} \\ \mbox{International Protection class}^1 & \mbox{IP65 in mated condition} \end{array}$ 

Operating temperature without housing sealing:  $-40\,^{\circ}\text{C}$  to  $+125\,^{\circ}\text{C}$ 

Cable clamp see page  $\underline{69}$  Housing suitable for two standard frames size 3 or 4.

 $2 \times \text{size } 3 = \text{size } 5$  $2 \times \text{size } 4 = \text{size } 6$ 

With lever locking, a minimum of 5,000 locking cycles are possible with lubrication. Up to 500 mating cycles, no lubrication is required.

Size	Part number A	Part number B	Dim. A	Dim. B	Dim. C	Dim. D	Dim. M
	Top cable outlet	Side cable outlet	mm	mm	mm	mm	Cable outlet
5	494.215.550.644.000	494.415.550.644.000	77.5	94	79	82.5	M40
6	495.215.550.644.000	495.415.550.644.000	104	132	94	90	M50

<sup>&</sup>lt;sup>1</sup> IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) used)


# METAL BULKHEAD HOUSING FOR CABLE HOOD WIDE


For mounting on your device

#### LEVER LOCKING





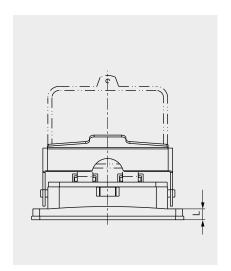

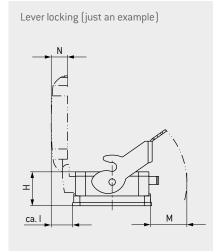

#### **TECHNICAL DATA**

Color of housing Gray (standard

similar to RAL 7001) Aluminum die casting

International

Material


Protection class<sup>1</sup>

in mated condition -40 °C to +125 °C Operating temperature

(short duration) -40 °C to +85 °C (continuous)

Sealing NBR; sealing material

With lever locking, a minimum of 5,000 locking cycles are possible with lubrication. Up to 500 mating cycles, no lubrication is required.

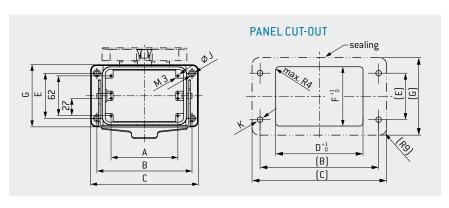

Size	Part number A	Part number B	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. H	Dim.	Dim. J	Dim. K	Dim. L	Dim. M	Dim. N
	Without protective cover	With protective cover	mm	mm	mm	mm	mm	mm	mm							
5	494.130.500.644.000	494.131.500.644.000	77.5	110	127	79	65	74	89	38	≈ 23	5.5	М5	7	31	17
6	495.130.500.644.000	495.131.500.644.000	104	148	168	117	70	80	96.7	41.5	≈ 26	7	М6	12	43	20


<sup>&</sup>lt;sup>1</sup> IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable hood wide used)


# METAL CABLE-TO-CABLE HOOD

#### With top cable outlet for a flying cable-to-cable connection

#### LEVER LOCKING



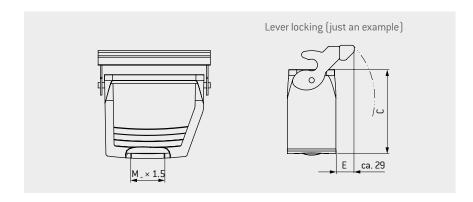

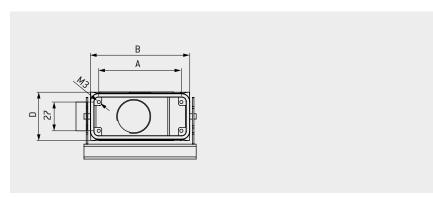

#### **TECHNICAL DATA**

To build a cable-to-cable connection. Suitable for use with cable hoods (page  $\underline{44}$ ).

Color of housing Gray (standard similar to RAL 7001)

Material Aluminum die casting

International

Protection class<sup>1</sup> IP65

in mated condition

Operating temperature  $-40\,^{\circ}\text{C}$  to  $+125\,^{\circ}\text{C}$ 

(short duration) -40 °C to +85 °C (continuous)

Sealing NBR; sealing material

Cable clamp see page 69
Adapter for PG clamp see page 70

With lever locking, a minimum of 5,000 locking cycles are possible with lubrication. Up to 500 mating cycles, no lubrication is required.


Size	Part number	Dim. A	Dim. B	Dim. C	Dim. D	Dim. M	Part number
		mm	mm	mm	mm	Cable outlet	Protective cover (see from page <u>50</u> )
1	490.331.450.644.102	44	60	75	43		490.097.500.644.001
2	491.331.450.644.102	57	73	75	43	Maa	491.097.133.644.000
3	492.331.450.644.102	77.5	93.3	79	45.5	M32	492.097.133.644.000
4	493.331.450.644.102	104	120	79	45.5		493.097.133.644.000

#### M40 CABLE OUTLET AVAILABLE ON REQUEST

 $<sup>^{\</sup>rm 1}$  IEC 60529:1989 (VDE 0470-1:2014-09) (depends on the cable clamp(s) used)

# PROTECTIVE COVERS

#### For metal housing

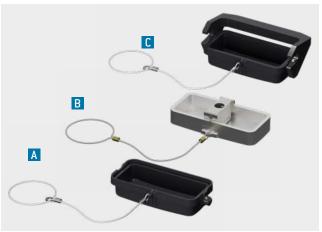

#### TECHNICAL DATA

Color (A / C) Black

Color (B) Gray (standard, similar to RAL 7001)

#### International Protection class IP65 in locked condition

Protective cover with locking latch (C) Protective cover with bolt and lanyard (A)

#### International Protection class IP40 in locked condition

Metal protective cover with center module for spindle locking


and lanyard (B)


Material (A/C) PC (Black)


Material (B) Aluminum die casting (body)

-40 °C to +125 °C Temperature range NBR; sealing material

Sealing

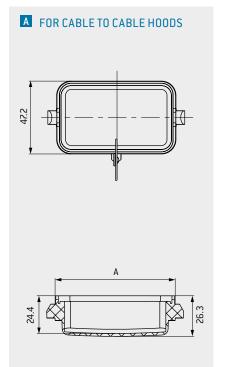

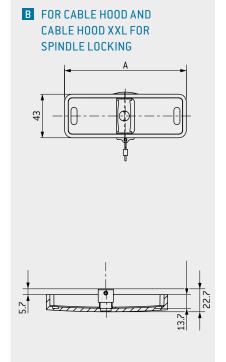

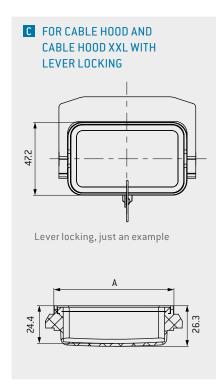

Size	IP65	IP40	IP65	Dim. A
	Туре А	Type B¹	Туре С	
	Protective cover with bolt and lanyard	Protective cover for spindle locking with lanyard and center module	Protective cover with locking latch	mm
1	490.097.700.921.001	-	490.097.700.921.002	60
2	491.097.700.921.001	491.097.613.644.001	491.097.700.921.002	73
3	492.097.700.921.001	492.097.613.644.001	492.097.700.921.002	93.5
4/XXL	493.097.700.921.001	493.097.613.644.001	493.097.700.921.002	120

# ODU-MAC® BLUE-LINE FRAME FOR HOUSING

#### With grounding for housing



#### **TECHNICAL DATA**

- Material: nickel-plated zinc die casting
- 1 unit = 2.4 mm


# Included in the scope of delivery: secondary locking part

For use and assembly, see page 31




# For optional strain relief see page 83



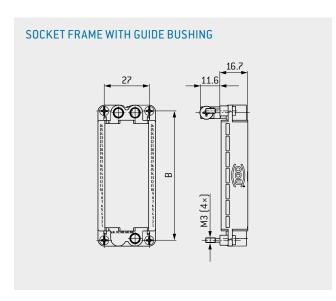

Sockets in bulkhead and surface-mounted housing or cable-to-cable hood. Pins in the cable hood. Modules are not mounted, contacts are supplied loose. See the options for coding from page 72

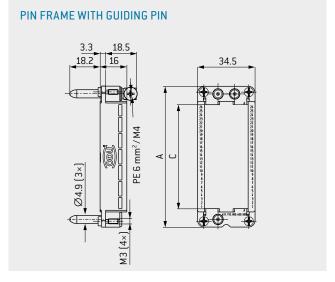

For the height of the contact pins, the same dimensions as described for the respective modules apply.

Size	Part number Socket frame	Part number Pin frame	Max. units 2.4 mm <sup>1</sup>	Dim. A	Dim. B	Dim. C
1	630.190.000.600.000	631.190.000.600.000	12	51	44	$12 \times 2.4 = 28.8$
2	630.191.000.600.000	631.191.000.600.000	18	64	57	18 × 2.4 = 43.2
3	630.192.000.600.000	631.192.000.600.000	26	84.5	77.5	26 × 2.4 = 62.4
4	630.193.000.600.000	631.193.000.600.000	37	111	104	37 × 2.4 = 88.8
RAPID						
2	630.191.000.600.000	631.191.000.600.001	18	64	57	$18 \times 2.4 = 43.2$
4	630.193.000.600.000	631.193.000.600.001	37	111	104	37 × 2.4 = 88.8
FRAMES FOR	CABLE HOOD WIDE					
5	2 × part number size 3	2 × part number size 3	2 x 26	84.5	77.5	$26 \times 2.4 = 62.4$
6	2 × part number size 4	2 x part number size 4	2 x 37	111	104	37 × 2.4 = 88.8

 $<sup>^1</sup>$  If the configuration doesn't fill the frame completely, please use blank modules (see page  $\underline{157}$ ). Please note that when equipping size 5 and 6 housings two frames are required.

# CABLE CLAMP AND REDUCING RING

#### CABLE CLAMP¹ FOR HOUSINGS ACCORDING TO IEC 62444:2010 (VDE 0619:2014-05)



#### **TECHNICAL DATA**

Material for body Sealing

NBR; sealing material

International

Protection class IP68 to 5 bar Temperature range  $-40 \, ^{\circ}\text{C}$  to  $+100 \, ^{\circ}\text{C}$ 

EMC and metal clamps available on request

Part number	Thread	Color	Width across flats	Tight- ening torque	Cable-Ø mm		
				Nm	Min.	Max.	
027.825.060.130.007	M25 × 1 5		30	8	6	13	
027.825.090.170.007	M23 × 1.5		30	0	9	17	
027.832.070.150.007	M32 × 1.5	Gray	36	10	7	15	
027.832.110.210.007		(RAL 7001)	36	10	11	21	
027.840.190.280.007	M40 × 1.5		46	13	19	28	
027.850.270.350.007	M50 × 1.5		55	15	27	35	
027.825.060.130.003	M25 4.5	M25 × 1.5		30	8	6	13
027.825.090.170.003	M23 × 1.5	Light	30	0	9	17	
027.832.070.150.003	M32 × 1 5	Gray	36	10	7	15	
027.832.110.210.003	M32 × 1.5		36	10	11	21	
027.840.190.280.003	M40 × 1.5		46	13	19	28	
027.832.070.150.008	M32 × 1.5	Black	ack 36	36 10	7	15	
027.832.110.210.008	M32 × 1.5	(RAL	36	10	11	21	
027.840.190.280.008	M40 × 1.5	9005)	46	13	19	28	

#### REDUCING RING FOR PLASTIC HOUSING



#### TECHNICAL DATA

Color Black (RAL 9005)

Material Plastic PA6 GF20, UL 94-V0

International

Protection class IP65

 $\begin{array}{ll} \mbox{Temperature range} & -40\,^{\circ}\mbox{C to }125\,^{\circ}\mbox{C} \\ \mbox{Sealing} & \mbox{NBR; sealing material} \end{array}$ 

Tightening torque  $4 \pm 0.5 \text{ Nm}$ 

Part number	Outside thread	Inside thread
921.000.006.000.360	M32 × 1.5	M25 × 1.5
921.000.006.000.356	M40 × 1.5	M32 × 1.5

 $<sup>^{\</sup>scriptsize 1}$  Cable clamp not included in the scope of delivery, but 0-ring is supplied with the housing.

# ADAPTER RING, BLIND PLUG, AND LOCKNUT

#### ADAPTER RING FOR CABLE CLAMP WITH PG THREAD




#### **TECHNICAL DATA**

Material Nickel-plated brass

Part number	Outside thread	Inside thread
921.000.006.000.254	M25 × 1.5	PG 21
921.000.006.000.255	M32 × 1.5	PG 29
921.000.006.000.267	M32 × 1.5	M40 × 1.5

#### **BLIND PLUG FOR SURFACE-MOUNTED HOUSING**

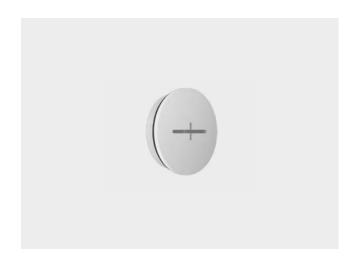

#### TECHNICAL DATA

Color Gray

Material PA glass-fiber reinforced

International Protection class IP68

Temperature range  $-40\,^{\circ}\text{C}$  to  $+125\,^{\circ}\text{C}$  Sealing NBR; sealing material

Part number	Thread
921.000.006.000.279	M25 × 1.5
921.000.006.000.268	M32 × 1.5
On request	M40×1.5
On request	M50 × 1.5

#### LOCKNUT FOR CABLE CLAMP



For fixing the cable clamp in the ODU-MAC® strain-relief housing

#### TECHNICAL DATA

Material Nickel-plated brass

Part number	Thread
931.000.003.000.112	M32 × 1.5
931.000.003.000.113	M40 × 1.5

# PROTECTIVE TRANSPORT COVER AND SECONDARY LOCKING PART

#### $PROTECTIVE\ TRANSPORT\ COVER\ FOR\ METAL\ HOUSING-for\ protecting\ the\ assembled\ cable\ hood\ during\ transport$




#### TECHNICAL DATA

Material Plastic PP

Color Black (similar to RAL 9002)

Size	Dim. B mm	Part number With holding rope	Part number Without holding rope
1	63	490.097.900.924.000	490.097.900.924.101
2	76	491.097.900.924.000	491.097.900.924.101
3	96.5	492.097.900.924.000	492.097.900.924.101
4/XXL	123	493.097.900.924.000	493.097.900.924.101

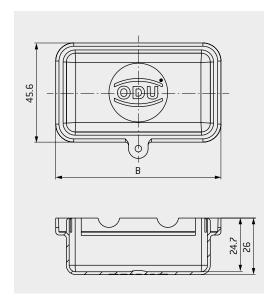

Please note: protective transport covers do not fit in case of using the coding option for housings.

#### SECONDARY LOCKING FOR MODULES



#### TECHNICAL DATA

Material Thermoplastic, glass-fiber reinforced

Part number – only if a replacement is required1
631.000.001.923.000

 $^{1}\mbox{The secondary locking part is included in the standard scope of delivery.}$ 

# CODING OPTIONS FOR HOUSINGS WITH LEVER LOCKING


#### To prevent mismating


In order to prevent mismating, it is in some cases useful to provide the connection systems with a coding.


Instead of cylinder screws, coding pins and coding sockets can be used in the housing of the ODU-MAC® Blue-Line. ODU offers 16 different coding options. Standard frames do not include additional coding upon delivery. If several adjacent connectors are used, this can prevent mismating.



#### **CODING OPTIONS**

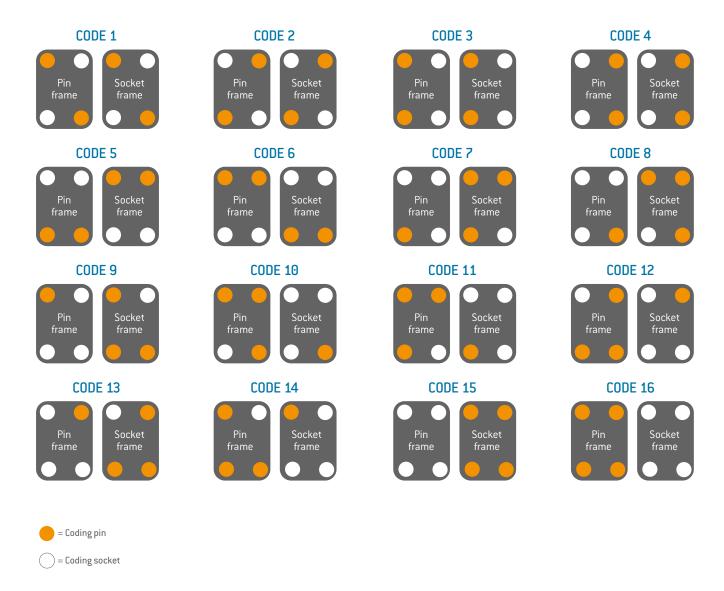

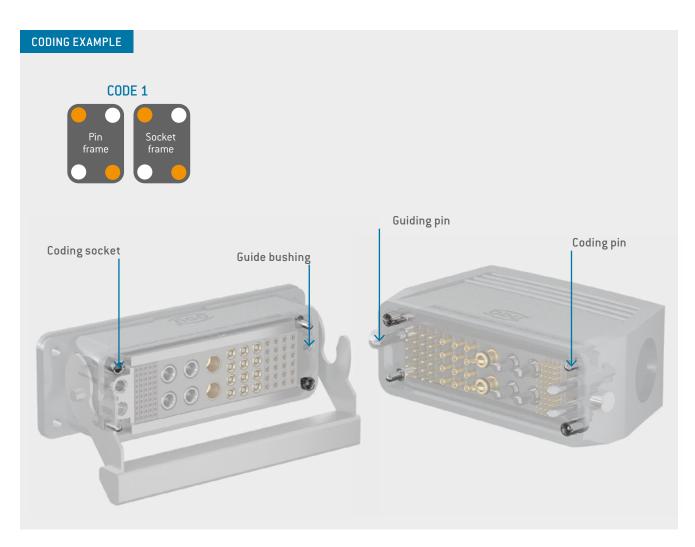

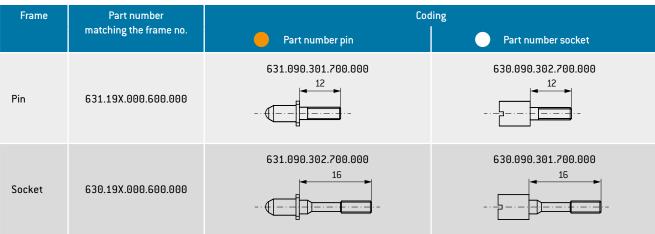

PART NUMBER BASIC TOOL, TORQUE WRENCH / 1.2 Nm: 598.054.002.000.000

PART NUMBER TOOL INSERT FOR ASSEMBLY OF CODING PIN: 598.054.203.000.000


PART NUMBER TOOL INSERT FOR ASSEMBLY OF CODING SOCKET: 598.054.110.000.000 OR 598.054.113.000.000

# CODING OPTIONS FOR HOUSINGS WITH SPINDLE LOCKING

#### To prevent mismating

In order to prevent mismating, it is in some cases useful to provide the connection systems with a coding.


Instead of cylinder screws, coding pins and coding sockets can be used in the housing of the ODU-MAC® Blue-Line. ODU offers 4 coding variations with these coding options in combination with spindle locking. Standard frames do not include additional coding upon delivery. If several adjacent connectors are used, this can prevent mismating.






#### **CODING OPTIONS**


#### CODE 1



#### CODE 2



#### CODE 5



#### CODE 6








= Coding socket



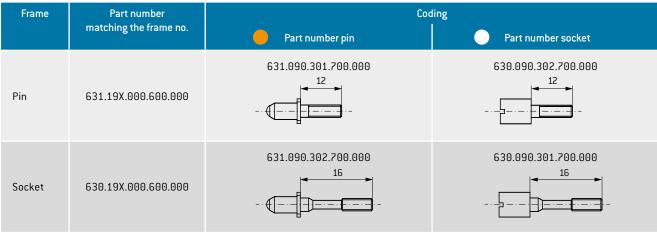

PART NUMBER BASIC TOOL, TORQUE WRENCH / 1.2 Nm: 598.054.002.000.000
PART NUMBER TOOL INSERT FOR ASSEMBLY OF CODING PIN: 598.054.203.000.000
PART NUMBER TOOL INSERT FOR ASSEMBLY OF CODING SOCKET: 598.054.113.000.000

# **CODING OPTIONS FOR CODED SPINDLES**

#### To prevent mismating

In order to prevent mismating, it is in some cases useful to provide the connection systems with a coding.

For this purpose, ODU has developed innovative coding that is directly integrated into the spindle for the ODU-MAC® Blue-Line housing versions. ODU provides up to 6 different coding options by installing 2 coding pins in the spindle locking and  $2\,$ closure plugs in the center module. If several adjacent connectors are used, this can prevent mismating.



#### **CODING OPTIONS**











Pin







CODE D



**CODE E** 
















= Coding pin





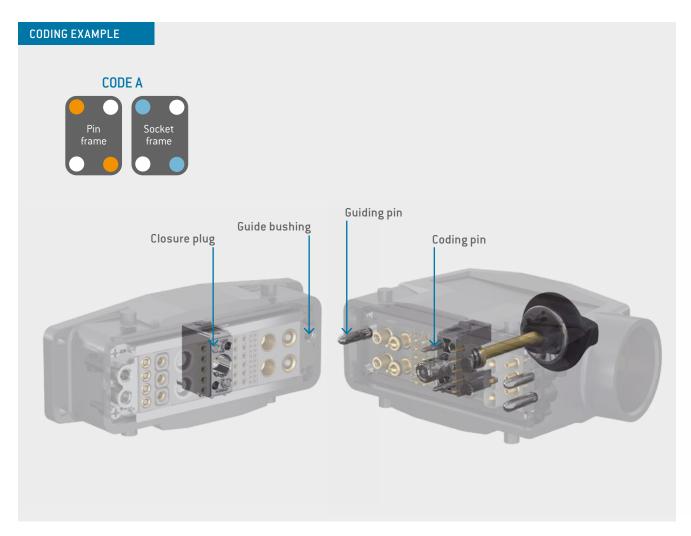

Size	With codin	Angle of	
	Part number Center module for spindle for bulkhead and surface-mounted housing and cable-to-cable hood	Part number Spindle locking for cable hood	rotation
2 (52 mm high)		635.091.003.200.010	180°
2 (72 mm high)		635.091.001.200.010	180°
3/4	634.090.001.304.010	635.092.011.200.010	270°
3/4	034.030.001.304.010	635.092.011.200.013	360°
XXL/RAPID		635.093.011.200.010	270°
XXL/RAPID		635.093.011.200.013	360°

Only if a replacement is required <sup>2</sup>						
Part number Coding pin	Part number Closure plug					
635.090.105.902.000	634.090.106.902.000					

# TORQUE WRENCH / 0.9 Nm FOR LEFT-HAND THREAD PART NUMBER BIT SLOT FOR THE ASSEMBLY OF THE SPINDLE CODING: 598.054.109.000.000

 $<sup>^{\</sup>rm 1}\!$  Coding pins and closure plugs are included as loose parts.

<sup>&</sup>lt;sup>2</sup> They are included in the standard scope of delivery.



# EASILY CONFIGURE THE ODU-MAC® BLUE-LINE ONLINE AT: <u>WWW.ODU-MAC.COM</u>

ODU-MAC®




# **AUTOMATIC DOCKING**


Requirements of the complete system	80
ODU-MAC® Blue-Line docking frame	82
ODU-MAC® Blue-Line strain-relief plate	83
ODU-MAC® Blue-Line strain-relief housing	84

# REQUIREMENTS OF THE COMPLETE SYSTEM

High mating cycles and high-speed data rates — in order to ensure these for automatic docking over the long term, the docking system must be a design consideration (e.g., centering systems).

Clean and smooth docking is secured by special guiding pins that are designed for the forces which guide the connector. Please also note the mechanical necessities as described on page  $\underline{81}$ .

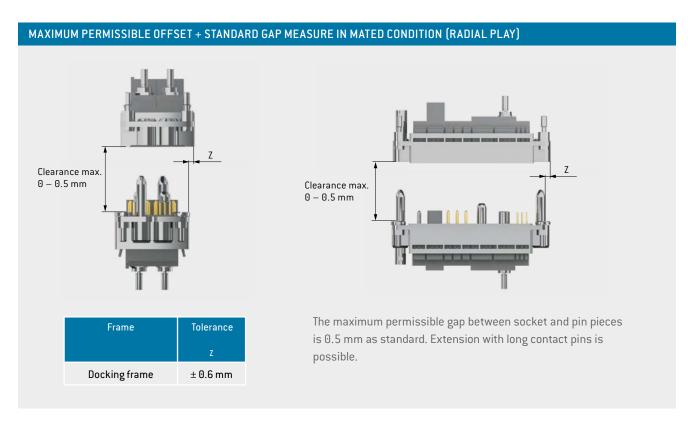

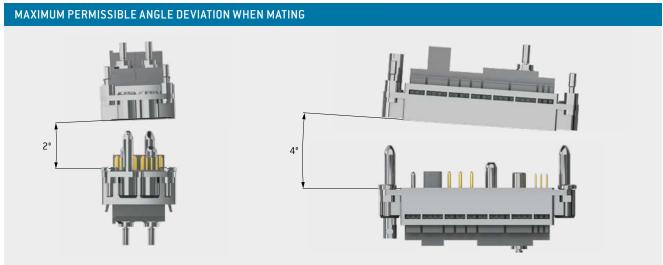

OUR TEAM IS HAPPY TO ANSWER ANY QUERIES YOU MAY HAVE.

# YOU REQUIRE GREATER VARIETY? A MORE COMPREHENSIVE OFFER IS PROVIDED BY OUR ODU-MAC® SILVER-LINE — THE SPECIALIST FOR AUTOMATIC DOCKING SOLUTIONS

#### ALIGNMENT SYSTEM (MECHANICAL NECESSITY) Strain relief for the cables / strands must be provided by the customer. Please see our strain-0 ์ ร relief plate (see page 83 or / and our strain-relief housing (see page 84). 1 ODU-MAC® Blue-Line socket piece (fixed) (screwed tight without play to wall B) 2 Fastening screw with TÔ) tolerance compensation: Axial play: 0.1 mm Radial play: ± 0.6 mm 3 Pins for self-centering of ODU-MAC® Blue-Line 0 4 ODU-MAC® Blue-Line pin piece (floating) (with play via centering bushing; screwed tight to wall S) 5 Pin for guiding from wall B to S (to be done by customer) Ô The values for the mated condition (pin S in B) result from the axial play of the centering bushings.

#### NOTE: AUTOMATIC DOCKING SYSTEMS

- The pin piece of the ODU-MAC® Blue-Line is to be fixed with the centering bushings supplied and so that the frame can float.
- The guiding system of the ODU-MAC® Blue-Line provides no guiding hardware for the overall plug-in.
- The maximum permissible gap between socket and pin pieces is 0.5 mm as standard. Extension with long contact pins is possible.
- An alignment system (e.g., guide rails) must be provided through the plug-in unit. The maximum permissible alignment error is, for example, less than  $\pm$  0.6 mm radial for the ODU-MAC® Blue-Line docking frame.
- Strain relief for the cables / strands must be provided by the customer, please use our strain relief plate (see page 83) or / and our strain-relief housing (see page 84).

#### FAILURE TO OBSERVE THESE SPECIFICATIONS MAY RESULT IN DAMAGE.

# ODU-MAC® BLUE-LINE DOCKING FRAME

#### Standard solution for docking applications (such as rack & panel)




#### TECHNICAL DATA

- Tolerance compensation: Axial play: min. 0.1 mm Radial play: ± 0.6 mm
- Pin piece (floating)

Included in the scope of delivery: secondary locking part For use and assembly, see page  $\underline{31}$ 



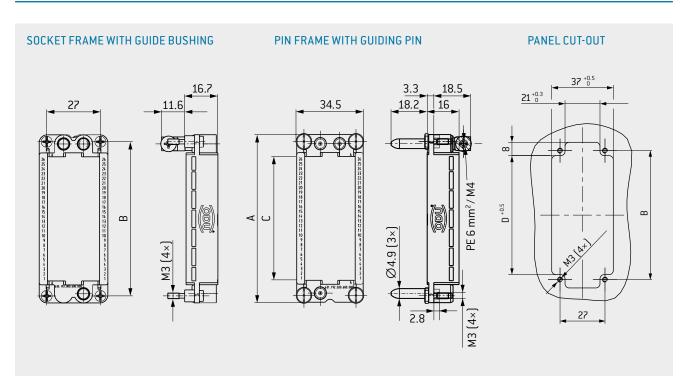

Modules are not mounted, contacts are supplied loose.

For the height of the contact pins, the same dimensions as described for the respective modules apply.


Size	Part number Socket frame	Part number Pin frame	Max. units × 2.4 mm1	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm
1	630.190.000.600.000	631.190.020.600.000	12	51	44	$12 \times 2.4 = 28.8$	38
2	630.191.000.600.000	631.191.020.600.000	18	64	57	$18 \times 2.4 = 43.2$	51
3	630.192.000.600.000	631.192.020.600.000	26	84.5	77.5	$26 \times 2.4 = 62.4$	71.5
4	630.193.000.600.000	631.193.020.600.000	37	111	104	37 × 2.4 = 88.8	98

<sup>&</sup>lt;sup>1</sup> If the configuration doesn't fill the frame completely, please use blank modules (see page <u>157</u>).

# ODU-MAC® BLUE-LINE STRAIN-RELIEF PLATE

#### For ODU-MAC® Blue-Line frames, the option for bundling and additional strain relief of single strands



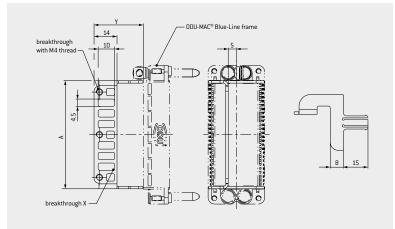

#### **TECHNICAL DATA**

Material Stainless stee

The plate can be used for both the pin and the socket side.

Size	Version	Part number	Dim. A mm	Number of breakthrough X	Length Y
1	Short	631.000.002.902.190	32.3	2	30
1	Long	631.000.001.902.190	32.3	2	44
2	Short	631.000.002.902.191	46.7	4	30
۷	Long	631.000.001.902.191	46.7	4	44
3	Short	631.000.002.902.192	65.9	6	30
3	Long	631.000.001.902.192		O	44
4	Short	631.000.002.902.193	02.2	9	30
4	Long	631.000.001.902.193	92.3	9	44

- If the strain relief is used, the voltage specifications of the single modules may be reduced. A check is necessary.
- With regard to the bending radius of the cables in conjunction with different housings, the use of the plate always has to be considered specifically, as there is a very large variety of variants possible.
- Doesn't work with the following housings:
  - Metal housing with spindle locking
  - Metal housing with lever locking and side cable outlet
  - ODU-MAC® PUSH-LOCK and ODU-MAC® RAPID Housing
- Long versions are working only for a very limited selection of housings.


Modul	Modul The respective strain relief plate can be used for the following modules:														
	Signal	Р	E	Power	High- current	Hi volt	gh age	Coax	High- speed	Fiber	optic				
	all	1 pos. 16 mm²	1 pos. 10 mm²	3 pos.	2 pos. 5 mm	2 pos.	6 pos.	4 pos. for 50 $\Omega$	RJ 45	POF	GOF				
pin side short								•					•		•
socket side short				-		_	_		-		-				
pin side long	·	•								•					
socket side long						•	·		·		•				


# ODU-MAC® BLUE-LINE STRAIN-RELIEF HOUSING

#### Accessories for docking solutions







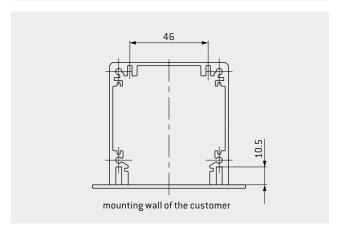

#### <sup>1</sup> A higher International Protection class is possible for additional sealing of the housing

#### **TECHNICAL DATA**


- Material: Aluminum
- Operating temperature: -40 °C to +125 °C
- International Protection class¹ can be adjusted individually
- Cable clamps, see page 69
- Locknut for cable clamp, see page 70

#### **FEATURES**

- Robust and compact
- Protection of the termination area
- Individual strain-relief variations, cable outlets as well as grounding connections
- Suitable for all ODU-MAC® docking frames (additional lengths available on request)
- Optional fixing of the PCBs and components in the protected interior
- ODU logo included as standard; customer logo can also be delivered on request


# ODU-MAC® BLUE-LINE STRAIN-RELIEF HOUSING

#### Accessories for docking solutions

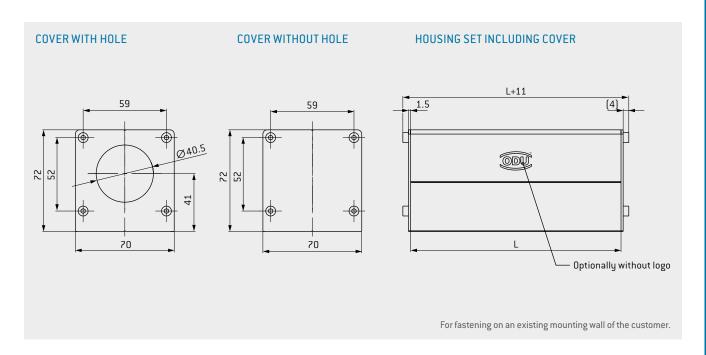

The set comprises a housing profile including 2 covers and corresponding fastening screws for assembly of the included cover. Fastening material for an existing mounting wall of the customer is not included in the scope of delivery.

Part number 2 × cover without hole	Part number 1 × cover with /1 × cover without hole	Part number 2 × cover with hole	Frame size	Dim. L mm
616.010.100.600.000	616.010.114.600.000	616.010.144.600.000	1 – 3	97
616.020.100.600.000	616.020.114.600.000	616.020.144.600.000	4	123

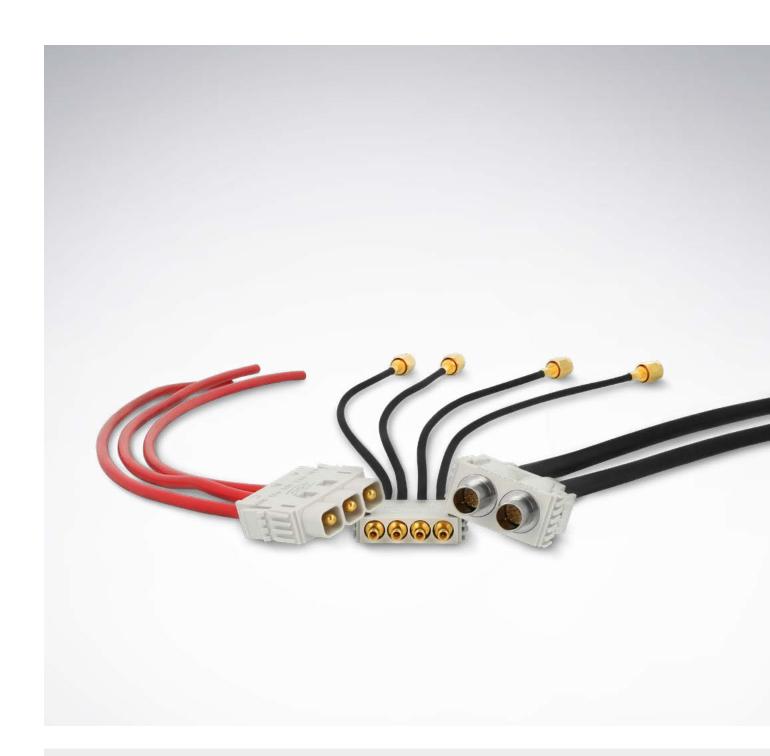

EASILY CONFIGURE THE ODU-MAC® BLUE-LINE ONLINE AT: <u>WWW.ODU-MAC.COM</u>

ODU-MAC



uverview	<u>88</u>
Signal	94
PCB termination	<u>102</u>
Coax	<u>106</u>
Compressed air / fluid / vacuum coupling	<u>114</u>
Shielded feedthrough / high-speed connector	<u>122</u>
Fiber optic	132
High-current	<u>138</u>
PE module	<u>146</u>
High-voltage	<u>148</u>
Combination modules	<u>152</u>
Thermocouples	<u>156</u>
Blank modules	<u>157</u>
Cable specifications	158



 ${\bf Modules\ marked\ with\ this\ symbol\ can\ be\ used\ in\ the\ PUSH-LOCK;\ note\ the\ space\ requirements.}$ 

	Modules marked with this symbol ca	Description	Units/width	Features (refer to module level only)		Page
		20 contacts  Contact-Ø: 0.7 mm	Units 4.8 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles	200 V 2,000 V 11 A for 0.38 mm <sup>2</sup> 2 min. 10,000 and pin protection	<u>94</u>
Signal	ALL LIVE TO SECOND TO SECO	10 contacts  Contact-Ø: 0.7 mm	1 Unit 2.4 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles  Maximum contact densi	320 V 2,500 V 11 A for 0.38 mm <sup>2</sup> 2 min. 10,000	<u>96</u>
Sig		6 contacts  Contact-Ø: 1.3 mm	Units 4.8 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles	400 V 3,000 V 19.5 A for 1 mm <sup>2</sup> 2 min. 10,000	<u>98</u>
	A B E O E O	5 contacts  Contact-Ø: 2 mm	3 Units 7.2 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles	630 V 3,000 V 33 A for 2.5 mm <sup>2</sup> 2 min. 10,000	<u>100</u>
PCB termination		20 contacts  Contact-Ø: 0.7 mm	Units 4.8 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles	200 V 2,000 V 7 A 2 min. 10,000 and pin protection	<u>102</u>
PCB tern		10 contacts  Contact-Ø: 0.7 mm	1 Unit 2.4 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles	320 V 2,500 V 7 A 2 min. 10,000	<u>103</u>

 $<sup>^1</sup>$ According to IEC 60664-1:2020 (VDE 0110-1:2022-07) for pollution degree 2  $^2$  For a definition of max. continuous current, see page  $\underline{186}$ 



Modules marked with this symbol can be used in the PUSH-LOCK; note the space requirements.

	Modules marked with this	Description		Features (refer to module level only)		Page
nination		6 contacts  Contact-Ø: 1.3 mm	Units 4.8 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles	400 V 3,000 V 13 A 2 min. 10,000	<u>104</u>
PCB termination	ANNUAL DESCRIPTION OF THE PROPERTY OF THE PROP	5 contacts  Contact-Ø: 2 mm	Junits 7.2 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles	550 V 3,000 V 25 A 2 min. 10,000	<u>105</u>
	Adda Adda	4 contacts for $50\Omega$ coax contacts	Units 7.2 mm	Frequency range Mating cycles  High contact density	0 – 2.8 GHz min. 10,000	<u>106</u>
Соах		$\begin{array}{c} \text{2 contacts for} \\ \text{50}\Omega\text{coax} \\ \text{contacts} \end{array}$	5 Units 12 mm	Frequency range Mating cycles	0 – 4 GHz min. 10,000	<u>108</u>
3	Discourse sealing	2 contacts for 50 Ω coax contacts SMA termination	Units 12 mm	Frequency range Mating cycles  12 GHz	0 – 12 GHz min. 10,000	<u>110</u>
		2 contacts for 75 $\Omega$ coax cont	acts 5 Units 12 mm	Frequency range Mating cycles	0 – 2.6 GHz min. 10,000	112

<sup>&</sup>lt;sup>1</sup>According to IEC 60664-1:2020 (VDE 0110-1:2022-07) for pollution degree 2 <sup>2</sup> For a definition of max. continuous current, see page 186



 $\label{thm:modules} \textbf{Modules marked with this symbol can be used in the PUSH-LOCK; note the space requirements.}$ 

	Modules marked with this symbol ca	Description	Units/width	Features (refer to module level only)	Page
		2 contacts	Units 12 mm	Tube-Ø inner-Ø: max. 4 mm outer-Ø Push-in: max. 6 mm  Mating cycles min. 10,000   12 bar	<u>114</u>
Compressed air / fluid / vacuum coupling		2 contacts	5 Units 12 mm	Tube-Ø M5 max. 4 mm Mating cycles min. 10,000  + 10 bar	<u>116</u>
Compressed air / flu		2 contacts	5 Units 12 mm	Tube-Ø M5 inside thread Mating cycles min. 10,000  + 10 bar	118
		1 contact	12 <sub>Units</sub> 28.8 mm	Tube inner-Ø 16 mm Mating cycles min. 10,000	<u>120</u>
Shielded feedthrough / high-speed connector		2 to 14 contacts for 2 insert size 1	6 Units 14.4 mm	Mating cycles min. 10,000 Suitable for all common bus systems CAT 5, USB® 2.0, USB® 3.2 Gen 1x1, FireWire®, Ethernet, SPE 10G BASE-T1 <sup>1</sup>	122
Shielded fe high-speec		2 to 14 contacts for 1 insert size 1	6 Units 14.4 mm	Mating cycles min. 10,000 Suitable for all common bus systems CAT 5, USB® 2.0, USB® 3.2 Gen 1x1, FireWire®, Ethernet, SPE 10G BASE-T1¹	<u>122</u>

<sup>&</sup>lt;sup>1</sup> Single Pair Ethernet according to IEC 63171-6:2020 (IEEE 802.3ch)



 $\label{thm:modules} \textbf{Modules marked with this symbol can be used in the PUSH-LOCK; note the space requirements.}$ 

	Modules marked with this symbol ca					D
	Modules	Description	Units/width	Feature: (refer to module l		Page
edthrough / connector		3 to 22 contacts for 1 insert size 2	7 Units 16.8 mm	Mating cycles  Suitable for all common bus HDMI® up to 48 Gbit/s, Displa Gbit/s, USB® up to 10 Gbit/s	3	<u>126</u>
Shielded feedthrough Andrewshish-Speed connector		RJ45 insert	7 Units 16.8 mm	Mating cycles min. 5,000  10 gigabit Ethernet <sup>1</sup> according to IEEE 802.3 an CAT 6 according to ANSI/TIA/EIA-568-C.2 CAT 6 <sub>A</sub> according to ANSI/TIA-568.2-D		<u>130</u>
Fiber optic (on request)		4 contacts for fiber optic only pre-assembled Physical Contact	Junits 7.2 mm	Mating cycles max. Insertion loss Single mode Multi mode	min. 1,000 0.5 dB 9 / 125 µm 50 / 125 µm	132
Fiber optic	January Control of the Control of th	4 contacts for fiber optic only pre-assembled Expanded Beam	Junits 7.2 mm	Mating cycles Max. Insertion loss Multi mode	min. 10,000 1.5 dB 50 / 125 μm	<u>134</u>
	COCCO COCCO	5 contacts for fiber optic POF	Junits 7.2 mm	Mating cycles Insertion loss typical	min. 10,000 1,5 dB for 660 nm	<u>136</u>



 $\label{thm:modules} \textbf{Modules marked with this symbol can be used in the PUSH-LOCK; note the space requirements.}$ 

	Modules marked with this symbol ca	Description	Units/width	Features (refer to module level only)		Page
		2 contacts for turned contacts with ODU LAMTAC®3 Contact-Ø: 5 mm	5 Units 12 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles	400 V 4,000 V 108 A for 16 mm <sup>2</sup> 2 min. 10,000	<u>138</u>
High-current		2 contacts for turned contacts with ODU LAMTAC®3 Contact-Ø: 8 mm	9 Units 21.6 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles	400 V 3,000 V 154 A for 25 mm <sup>2</sup> 2 min. 10,000	<u>140</u>
High-c	and 6 Out	1 contact for turned contacts with ODU LAMTAC®3 Contact-Ø: 12 mm	8 Units 19.2 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles  + High-voltage	2,500 V 10,000 V 225 A for 50 mm <sup>2</sup> 2 min. 10,000	<u>142</u>
		3 contacts  Contact-Ø: 3.5 mm	Units 9.6 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Max. continuous current <sup>2</sup> Pollution degree <sup>1</sup> Mating cycles  + High-voltage	2,500 V 10,000 V 58 A for 6 mm <sup>2</sup> 2 min. 10,000	<u>144</u>
PE		1 contact with ODU LAMTAC® 3 Contact-Ø: 8 mm	Units 12 mm	Mating cycles Conduct cross-section	min. 10,000 10 / 16 / 25 mm²	<u>146</u>

<sup>&</sup>lt;sup>1</sup>Single Pair Ethernet according to IEC 63171-6:2020(IEEE 802.3ch) <sup>2</sup> For a definition of max. continuous current, see page 186 <sup>3</sup> Contact with lamella technology

	Modules marked with this symbol can be used in the PUSH-LOCK; note the space requirements.					
	Modules	Description	Units/width	Features (refer to module le		Page
High-voltage		2 contacts  Contact-Ø: 1.3 mm	5 Units 12 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Pollution degree <sup>1</sup> Mating cycles	4,000 V 12,000 V 2 min. 10,000	<u>148</u>
High-v		6 contacts  Contact-Ø: 1.3 mm	Units 4.8 mm	Operating voltage <sup>1</sup> Rated surge voltage <sup>1</sup> Pollution degree <sup>1</sup> Mating cycles	1,500 V 6,000 V 2 min. 10,000	<u>150</u>
Combination		2 contacts High-speed & coax	Units 14.4 mm	Mating cycles Coax  Selected inserts are suitable rates up to 5 Gbit/s. Suitable for CAT 5, USB® 2.0, UFireWire®, Ethernet, SPE 10G	JSB® 3.2 Gen 1x1,	<u>152</u>
Combi		2 contacts High-speed & compressed air	G <sub>Units</sub>	Mating cycles Compressed air  Selected inserts are suitable rates up to 5 Gbit/s. Suitable USB® 2.0, USB® 3.2 Gen 1x1, SPE 10G BASE-T1²	for CAT 5,	<u>152</u>
Thermocoupling	LALLA LALLA CONTRACTOR OF THE PARTY OF THE P	6 contacts  Contact-Ø: 1.0 mm	Units 4.8 mm	Thermocouple type  Mating cycles	K & T, others on request min. 5,000	<u>156</u>
Blank modules		Blank modules	2.4 mm 3 7.2 mm 5 12 mm	Used to fill incomplete frame:	5.	<u>157</u>

<sup>&</sup>lt;sup>1</sup>According to IEC 60664-1:2020 (VDE 0110-1:2022-07) for pollution degree 2 <sup>2</sup> Single Pair Ethernet according to IEC 63171-6:2020 (IEEE 802.3ch)

# MODULE 20 CONTACTS 1

#### Pin protection against mechanical damage



Contact diameter: 0.7 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 11 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be  $\,$ reduced according to VDE 0298-4:2023-06 (see page 188).
- For crimp information, see from page 168

Materials			
Insulator	Thermoplastic acc. to UL 94		
Contact	Cu alloy		
Contact finishing	Gold-plated		

Insulator	Thermoplastic acc. to UL 94			
Contact	Cu alloy			
Contact finishing	Gold-plated			
Technical data				

Voltage data according to IEC 60664-1:2020
(VDE 0110-1:2022-07) <sup>2,3</sup>

Operating voltage	200 V	10 V	
Pollution degree	2	3	
Rated surge voltage <sup>3</sup>	2,000 V		
Clearance distance	1.0 m	m	
Creepage distance	1.0 m	m	

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	475 V
Test voltage	1,425 V


#### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)6

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V	
Operating voltage	200 V	10 V	
Pollution degree	2 3		
Test voltage	1,076 V	/ AC	

Part number insulator				
Socket insulator	Pin insulator			
630.119.120.922.000	631.119.120.922.000			

Contact	Part number	Conductor cross- section mm²	Termination AWG		minal rrent <sup>5</sup> Module fully equipped A	Max. continuous current <sup>1</sup> Single contact A	Contact resistance mΩ		
Pin short	185.710.000.270.000	0.38	9						
Pin long	185.711.000.270.000	0.14 – 0.	1	22 – 26	7.0	5.5	11.0	3.5	
Socket	175.581.000.270.000		2						
Pin short	185.B26.000.270.000	5 – 0.14	14	.14	•				
Pin long	185.B27.000.270.000		26 – 30	6.5	3.2	10.0	3.5		
Socket	175.C09.000.270.000	0.02	2						
Contact removal	087.7CC.070.005.000								

PCB termination available on request, for suitable modules, please see page 102.

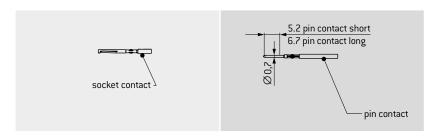

<sup>1</sup> For a definition of max. continuous current, see page 188 2 IEC 60664-1:2020 (VDE 0110-1:2022-07) see page 179 3 This voltage specification is according to IEC 60664-1:2020 (VDE 0110-1:2022-07) only valid for equipment with a maximum expected rated surge voltage of 2,000 V, which is not directly connected to the lowvoltage grid. <sup>4</sup> See page 185 Determined according to IEC 60512-5-2:2002 at increased temperature 45 K <sup>6</sup> See page 182.


# CABLE ASSEMBLY - MODULE 20 CONTACTS




Technical data wires 0.34 mm² / AWG 22, see page <u>163</u>			
TPC – tin plated copper acc. to EN 13602			
UL-PVC semi rigid (UL-Style 1061 / 10002)			
−10 up to +105 °C			
−30 up to +105 °C			
1,500 V / AC (UL-Style 1061/10002)			
300 V (UL-Style 1061/10002)			

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.


# PRE-ASSEMBLED MODULES

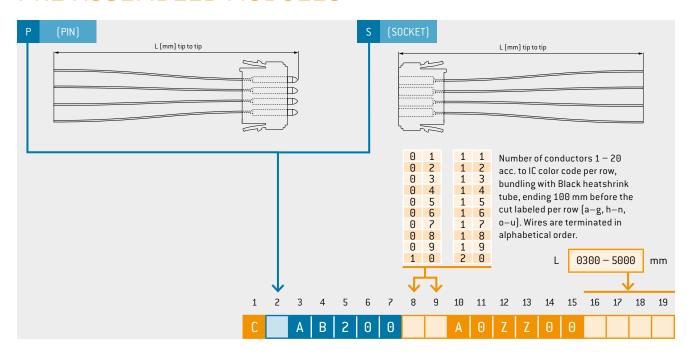

# PRE-ASSEMBLED CONTACTS

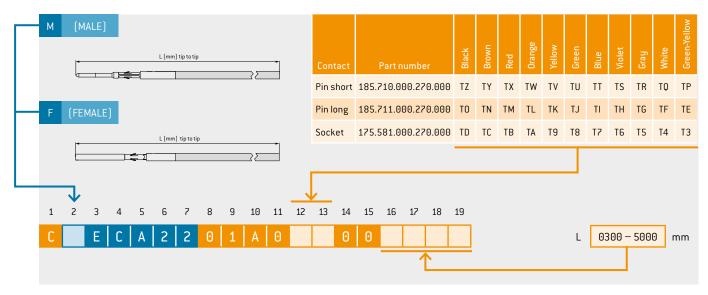

# MODULE 10 CONTACTS [6]

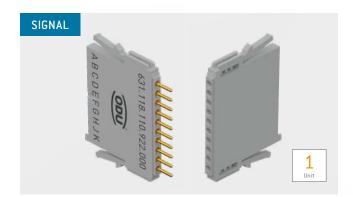

Contact diameter: 0.7 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 11 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be  $\,$ reduced according to VDE 0298-4:2023-06 (see page 188).
- For crimp information, see from page 168

Materials			
Insulator	Thermoplastic acc. to UL 94		
Contact	Cu alloy		
Contact finishing	Gold-plated		

Insulator	Thermoplastic acc. to UL 94
Contact	Cu alloy
Contact finishing	Gold-plated

Technical data

#### Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)<sup>2</sup>

Operating voltage	320 V	63 V	
Pollution degree	2	3	
Rated surge voltage	2,500 V		
Clearance distance	1.4 mm		
Creepage distance	1.6 mm		

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	475 V
Test voltage	1,425 V


#### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)3

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	320 V	63 V
Pollution degree	2	3
Test voltage	1,320 V AC	

Part number insulator			
Socket insulator	Pin insulator		
630.118.110.922.000	631.118.110.922.000		

Contact	Part number	Conductor cross- section mm²	Termination AWG		ominal Irrent <sup>5</sup> Module fully equipped A	Max. continuous current <sup>1</sup> Single contact A	Contact resistance mΩ																									
Pin short	185.710.000.270.000	0.38	56																													
Pin long	185.711.000.270.000	0.14 – 0	22 – 2	7.0	5.5	11.0	3.5																									
Socket	175.581.000.270.000	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	2				
Pin short	185.B26.000.270.000	0.14	0																													
Pin long	185.B27.000.270.000	1	26 – 30	6.5	5.0	10.0	3.5																									
Socket	175.099.000.270.000	0.05	2																													
Contact removal	087.7CC.070.005.000																															


PCB termination available on request, for suitable modules, please see page 103.

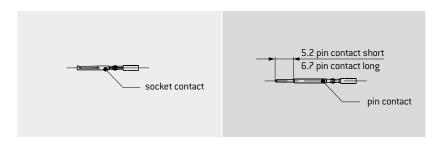

 $<sup>^{1}</sup>$ For a definition of max. continuous current, see page  $\underline{188}$   $^{2}$  IEC 60664-1:2020 (VDE 0110-1:2022-07) see page  $\underline{179}$   $^{3}$  See page  $\underline{182}$   $^{4}$  See page  $\underline{185}$ 

<sup>&</sup>lt;sup>5</sup> Determined according to IEC 60512-5-2:2002 at increased temperature 45 K


# CABLE ASSEMBLY - MODULE 10 CONTACTS

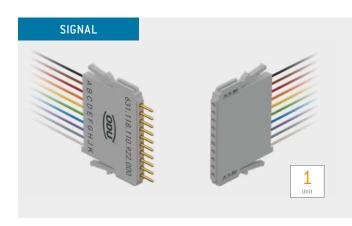


Technical data wires 0.34 mm² / AWG 22, see page <u>163</u>		
Conductor	TPC – tin plated copper acc. to EN 13602	
Insulation	UL-PVC semi rigid (UL-Style 1061 / 10002)	
Temperature range in motion	−10 up to +105 °C	
Temperature range at rest	−30 up to +105 °C	
Test voltage	1,500 V / AC (UL-Style 1061/10002)	
Operating voltage	300 V (UL-Style 1061/10002)	

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.


# PRE-ASSEMBLED MODULES

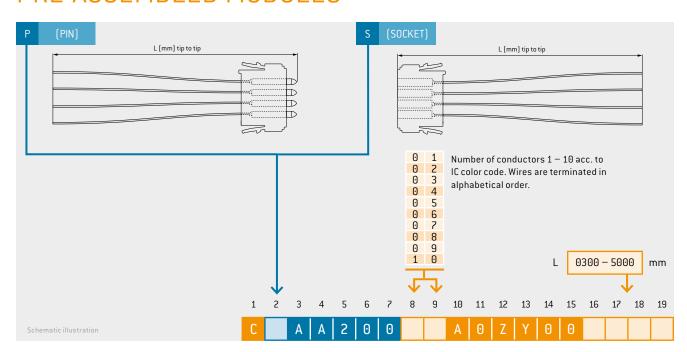

# PRE-ASSEMBLED CONTACTS

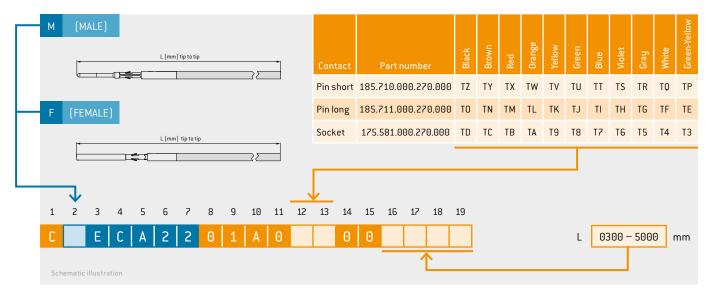

# MODULE 6 CONTACTS

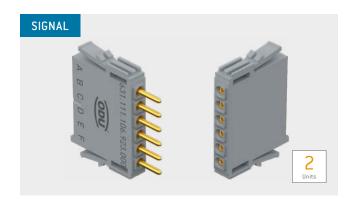

Contact diameter: 1.3 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 19.5 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be  $\,$ reduced according to VDE 0298-4:2023-06 (see page 188).
- For crimp information, see from page 168

Materials		
Insulator	Thermoplastic acc. to UL 94	
Contact	Cu alloy	
Contact finishing	Gold-plated	

Insulator	Thermoplastic acc. to UL 94
Contact	Cu alloy
Contact finishing	Gold-plated

Technical data

#### Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)<sup>2</sup>

400 V	160 V	
2	3	
3,000 V		
2.1 mm		
2.5 mm		
	2 3,000 2.1 m	

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	775 V
Test voltage	2,325 V


#### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)3

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	500 V	200 V
Pollution degree	2	3
Test voltage	1,730 V AC	

Part number insulator	
Socket & Pin 631.111.106.923.000	

Contact	Part number	Conductor cross- section mm²	Termination AWG		ominal irrent <sup>5</sup> Module fully equipped A	Max. continuous current <sup>1</sup> Single contact A	Contact resistance mΩ					
Pin short	185.432.000.270.000	1.00	20									
Pin long	185.424.000.270.000	0.50 - 1.	18 – 2	12.5	11.5	19.5	1.8					
Socket	175.535.000.270.000		0.5	0.5	0.5	0.5	0.5	0.5	П			
Pin short	185.714.000.270.000	0.38	56									
Pin long	185.713.000.270.000		22 – 2	9.5	7.0	14.0	1.8					
Socket	175.A42.000.270.000	0.14	2									
Contact removal tool	087.7CC.130.004.000											


PCB termination available on request, for suitable modules, please see page 104.

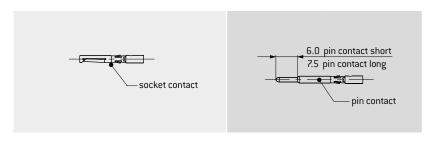

 $<sup>^{1}</sup>$ For a definition of max. continuous current, see page  $\underline{188}$   $^{2}$  IEC 60664-1:2020 (VDE 0110-1:2022-07) see page  $\underline{179}$   $^{3}$  See page  $\underline{182}$   $^{4}$  See page  $\underline{185}$ 

<sup>&</sup>lt;sup>5</sup> Determined according to IEC 60512-5-2:2002 at increased temperature 45 K


# CABLE ASSEMBLY - MODULE 6 CONTACTS

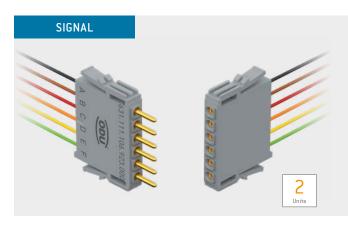


Technical Data wires 1.0 mm² / AWG 18, see page. <u>163</u>				
Conductor	TPC – tin plated copper acc. to EN 13602			
Insulation	UL-PVC +105 °C (UL-Style 1007/1569)			
Temperature range in motion	−10 up to +105 °C			
Temperature range at rest	−30 up to +105 °C			
Test voltage	3,000 V/AC (UL-Style 1007 / 1569)			
Operating voltage	300 V (UL-Style 1007/1569)			

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.

# PRE-ASSEMBLED MODULES

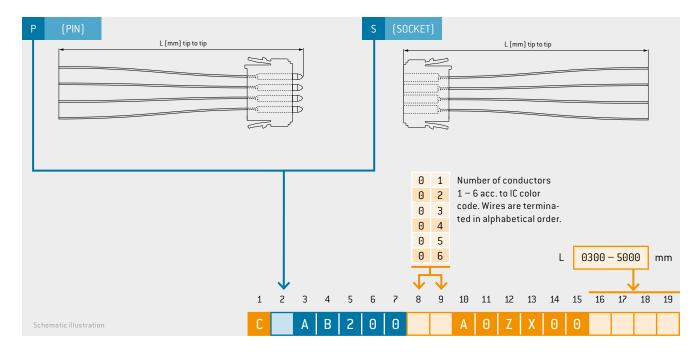

# PRE-ASSEMBLED CONTACTS

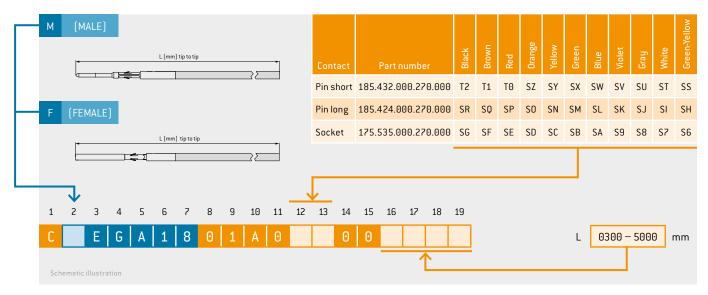

# MODULE 5 CONTACTS ©



Contact diameter: 2 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 33 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be  $\,$ reduced according to VDE 0298-4:2023-06 (see page 188).
- For crimp information, see from page 168

Materials				
Insulator	Thermoplastic acc. to UL 94			
Contact	Cu alloy			
Contact finishing	Gold-plated			

Insulator	Thermoplastic acc. to UL 94
Contact	Cualloy
Contact finishing	Gold-plated

Technical data

#### Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)<sup>2</sup>

630 V	250 V	
2	3	
3,000 V		
2.5 m	m	
3.4 m	m	
	2 3,000 2.5 m	

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	1,025 V
Test voltage	3,075 V


#### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)3

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	672 V	267 V
Pollution degree	2	3
Test voltage	1,959 \	'AC

Part number insulator	
Socket & Pin 631.112.105.923.000	

Contact	Part number	Conductor cross- section mm²	Termination AWG	-	ominal irrent <sup>5</sup> Module fully equipped A	Max. continuous current <sup>1</sup> Single contact A	Contact resistance mΩ						
Pin short	185.441.000.270.000												
Pin long	185.440.000.270.000	2.50	14	24.0	19.0	33.0	1.0						
Socket	175.570.000.270.000								10				
Pin short	185.437.000.270.000	50	m										
Pin long	185.436.000.270.000	1.00-1.50	16–18	18.0	15.0	27.0	1.0						
Socket	175.567.000.270.000	1.6											
Contact removal	087.7CC.200.003.000												

PCB termination available on request, for suitable modules, please see page 105.

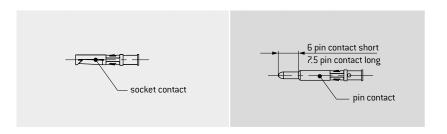

 $<sup>^{1}</sup>$ For a definition of max. continuous current, see page  $\underline{188}$   $^{2}$  IEC 60664-1:2020 (VDE 0110-1:2022-07) see page  $\underline{179}$   $^{3}$  See page  $\underline{182}$   $^{4}$  See page  $\underline{185}$ 

<sup>&</sup>lt;sup>5</sup> Determined according to IEC 60512-5-2:2002 at increased temperature 45 K


# CABLE ASSEMBLY — MODULE 5 CONTACTS [6]




Technical data wires 2.50 mm² / AWG 14, see page <u>163</u>				
Conductor	TPC – tin plated copper acc. to EN 13602			
Insulation	UL-PVC +105 °C (UL-Style 1569)			
Temperature range in motion	−10 up to +105 °C			
Temperature range at rest	−30 up to +105 °C			
Test voltage	3,000 V/AC (UL-Style 1569)			
Operating voltage	300 V (UL-Style 11569)			

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.

# PRE-ASSEMBLED MODULES

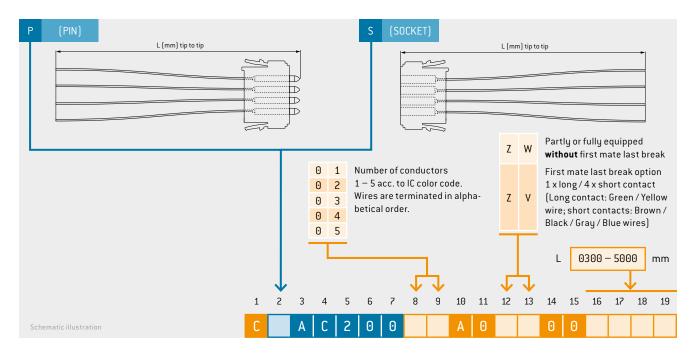

# PRE-ASSEMBLED CONTACTS

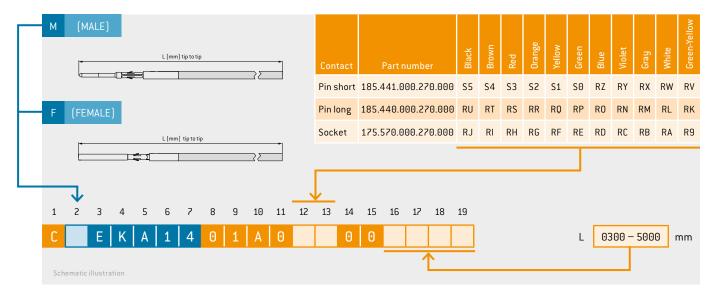

# **MODULE 20 CONTACTS**



Contact diameter: 0.7 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 7 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be reduced according to VDE 0298-4:2023-06 (see page <u>188</u>).
- Solder temperature for PCB termination module (Black PA) 260 °C for 30 seconds
- Maximum adjacent arrangement of 10 modules, more modules on request acc. configuration

Materials				
Insulator pin / socket- frame	Thermoplastic acc. to UL 94 (Gray)			
Insulator PCB	Thermoplastic acc. to UL 94 (Black)			
Contact	Cu alloy			
Contact finishing	Gold-plated			

#### Technical data

# Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)<sup>2</sup>

200 V	10 V
2	3
2,000 V	
1.0 m	m
1.0 m	m
	2

#### Voltage data according to MIL<sup>4</sup>


Operating voltage	450 V
Test voltage	1,400 V

# Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)<sup>3</sup>

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	200 V	10 V
Pollution degree	2	3
Test voltage	1,076 V	'AC

# Compatible with module 20 contacts on page <u>94</u>

- Frame for the transfer of grounding to the board and corresponding grounding socket on request
- Explanations of the structure on page <u>32</u>.



Description	Part number	Nominal current <sup>5</sup>	Max. continuous current <sup>1</sup>	Contact resistance <sup>6</sup>
		Α	A	mΩ
Insulator socket incl. contacts	630.117.020.923.000	4.5	7	7
Insulator pin incl. contacts	631.117.020.923.000	4.5	7	7
Insulator PCB incl. injected contacts <sup>4</sup>	630.143.020.922.000	4.5	7	7

<sup>&</sup>lt;sup>1</sup>For a definition of max. continuous current, see page 188 <sup>2</sup>See page 179. This voltage specification is according to IEC 60664-1:2020 (VDE 0110-1:2022-07) only valid for equipment with a maximum expected rated surge voltage of 2,000 V, which is not directly connected to the low-voltage grid. <sup>3</sup> See page 182 <sup>4</sup> See page 185 <sup>5</sup> Determined according to IEC 60512-5-2:2002 at increased temperature 45 K <sup>6</sup> Due to the double transfer between the modules and the PCB termination modules, the contact resistance is twice as high as with a normal signal module. <sup>7</sup> PCB contacts are injected in the insulator, can be conditionally removed. See page 32

# **MODULE 10 CONTACTS**



Contact diameter: 0.7 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 7 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be reduced according to VDE 0298-4:2023-06 (see page 186).
- Solder temperature for PCB termination module (Black PA) 260 °C for 30 seconds
- Maximum adjacent arrangement of 10 modules, more modules on request acc. configuration

Materials		
Insulator pin/socket- frame	Thermoplastic acc. to UL 94 (Gray)	
Insulator PCB	Thermoplastic acc. to UL 94 (Black)	
Contact	Cu alloy	
Contact finishing	Gold-plated	

#### Technical data

# Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)<sup>2</sup>

320 V	63 V
2	3
2,500 V	
1.4 mm	
1.6 m	m
	2 2,500 1.4 m

#### Voltage data according to MIL<sup>4</sup>


Operating voltage	450 V
Test voltage	1,400 V

# Voltage data according to standard IEC 61010-1:2010 (VDE 0411-1:2020-03)3

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	320 V	63 V
Pollution degree	2	3
Test voltage	1,320 V	'AC

# Compatible with module 10 contacts on page <u>96</u>

- Frame for the transfer of grounding to the board and corresponding grounding socket on request
- Explanations of the structure on page <u>32</u>.



Description	Part number	Nominal current <sup>5</sup>	Max. continuous current <sup>1</sup>	Contact resistance <sup>6</sup>
		А	А	mΩ
Insulator socket incl. contacts	630.110.010.923.000	4.5	7	7
Insulator pin incl. contacts	631.110.010.923.000	4.5	7	7
Insulator PCB incl. injected contacts <sup>7</sup>	630.140.010.922.000	4.5	7	7

<sup>&</sup>lt;sup>1</sup>For a definition of max. continuous current, see page 188 <sup>2</sup>See page 179 <sup>3</sup>See page 185 <sup>5</sup>Determined according to IEC 60512-5-2:2002 at increased temperature 45 K <sup>6</sup>Due to the double transfer between the modules and the PCB termination modules, the contact resistance is twice as high as with a normal signal module. <sup>7</sup>PCB contacts are injected in the insulator, can be conditionally removed. See page 32

# **MODULE 6 CONTACTS**



Contact diameter: 1.3 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 13 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be reduced according to VDE 0298-4:2023-06 (see page <u>186</u>).
- Solder temperature for PCB termination module (black PA) 260 °C for 30 seconds
- Maximum adjacent arrangement of 10 modules, more modules on request acc. configuration

Materials		
Insulator pin/socket- frame	Thermoplastic acc. to UL 94 (Gray)	
Insulator PCB	Thermoplastic acc. to UL 94 (Black)	
Contact	Cu alloy	
Contact finishing	Gold-plated	

#### Technical data

### Voltage data according to IEC 60664-1:2020 [VDE 0110-1:2022-07]<sup>2</sup>

(**************************************		
Operating voltage	400 V	160 V
Pollution degree	2	3
Rated surge voltage	3,000	) V
Clearance distance	2.1 m	m
Creepage distance	2.5 m	m

#### Voltage data according to MIL<sup>4</sup>


Operating voltage	350 V
Test voltage	1,100 V

# Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)<sup>3</sup>

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	500 V	200 V
Pollution degree	2	3
Test voltage	1,730 \	/ AC

# Compatible with module 6 contacts on page <u>98</u>

- Frame for the transfer of grounding to the board and corresponding grounding socket on request
- Explanations of the structure on page <u>32</u>.



Description	Part number	Nominal current <sup>5</sup>	Max. continuous current <sup>1</sup>	Contact resistance <sup>6</sup>
		Α	A	mΩ
Insulator socket incl. contacts	630.111.006.923.000	8	13	3.6
Insulator pin incl. contacts	631.111.006.923.000	8	13	3.6
Insulator PCB incl. injected contacts <sup>7</sup>	630.141.006.922.000	8	13	3.6

<sup>&</sup>lt;sup>1</sup>For a definition of max. continuous current, see page 188 <sup>2</sup>See page 179 <sup>3</sup>See page 185 <sup>5</sup>Determined according to IEC 60512-5-2:2002 at increased temperature 45 K <sup>6</sup>Due to the double transfer between the modules and the PCB termination modules, the contact resistance is twice as high as with a normal signal module. <sup>7</sup>PCB contacts are injected in the insulator, can be conditionally removed. See page 32

# **MODULE 5 CONTACTS**



Contact diameter: 2 mm
Mating cycles: min. 10,000
Current-carrying capacity<sup>1</sup>: 25 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be reduced according to VDE 0298-4:2023-06 (see page 186).
- Solder temperature for PCB termination module (black PA) +260 °C for 30 seconds
- Maximum adjacent arrangement of 10 modules, more modules on request acc. configuration

Materials		
Insulator pin/socket- frame	Thermoplastic acc. to UL 94 (Gray)	
Insulator PCB	Thermoplastic acc. to UL 94 (Black)	
Contact	Cualloy	
Contact finishing	Gold-plated	

#### Technical data

# Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)<sup>2</sup>

Operating voltage	550 V	220 V
Pollution degree	2	3
Rated surge voltage	3,000	) V
Clearance distance	2.5 m	m
Creepage distance	2.8 m	m

#### Voltage data according to MIL<sup>4</sup>


Operating voltage	700 V
Test voltage	2,200 V

# Voltage data according to standard IEC 61010-1:2010 (VDE 0411-1:2020-03)3

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	555 V	221 V
Pollution degree	2	3
Test voltage	1,959 V	'AC

# Compatible with module 5 contacts on page 100

- Frame for the transfer of grounding to the board and corresponding grounding socket on request
- Explanations of the structure on page <u>32</u>.



Description	Part number	Nominal current <sup>5</sup>	Max. continuous current <sup>1</sup>	Contact resistance <sup>6</sup>
		Α	А	mΩ
Insulator socket incl. contacts	630.112.005.923.000	16	25	2
Insulator pin incl. contacts	631.112.005.923.000	16	25	2
Insulator PCB incl. injected contacts <sup>7</sup>	630.142.005.922.000	16	25	2

<sup>&</sup>lt;sup>1</sup>For a definition of max. continuous current, see page 188 <sup>2</sup>See page 179 <sup>3</sup> See page 182 <sup>4</sup>See page 185 <sup>5</sup>Determined according to IEC 60512-5-2:2002 at increased temperature 45 K <sup>6</sup>Due to the double transfer between the modules and the PCB termination modules, the contact resistance is twice as high as with a normal signal module. <sup>7</sup> PCB contacts are injected in the insulator, can be conditionally removed. See page 32

# MODULE 4 CONTACTS FOR 50 $\Omega$



Mating cycles: min. 10,000 Frequency range⁵: 0 − 2.8 GHz

#### **TECHNICAL NOTES**

• For crimp information, see from page 168

Materials		
Insulator	Thermoplastic acc. to UL 94	
Contact/insulator	Cu alloy / PTFE	
Contact finishing	Gold-plated	

Technical data				
Voltage data according to IEC 60664-1:2020 [VDE 0110-1:2022-07] <sup>2</sup>				
Operating voltage 160 V				
Pollution degree	2			
Rated surge voltage	1,500 V			
Frequency range <sup>5</sup>	0 – 2.8 GHz			
Insulation resistance	$>$ 100 G $\Omega$			
Clearance distance <sup>6</sup>	0.8 mm			
Creepage distance <sup>6</sup>	0.8 mm			

Description	Part number	Characteristic impedance $\Omega$	Frequency range GHz	Cable <sup>3</sup>	Part number outer conductor crimp dies for crimping tool 080.000.039.000.000
Pin	122.133.003.270.000	50	2.8	RG 174, RG 188, RG 316	082.000.039.102.001
contact	122.133.001.270.000		0.5	RG 178 RG 196	082.000.039.101.000
Socket	122.133.004.270.000	50	2.8	RG 174, RG 188, RG 316	082.000.039.102.001
contact	122.133.002.270.000		0.5	RG 178, RG 196	082.000.039.101.000
Crimping tool inner conductor	080.000.051.000.000				
Positioner inner conductor	080.000.051.102.000				
Removal tool	087.7CC.310.001.000				

Module 4 contacts	Part number
Insulator	631.121.104.923.000

#### Voltage data according to MIL<sup>4</sup>


Operating voltage	525 V
Test voltage	1,575 V

# Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)<sup>3</sup>

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub> ≤ 300 V
Operating voltage	160 V
Pollution degree	2
Test voltage	984 V AC

#### HIGH-FREQUENCY CHARACTERISTICS FOR 50 Ω COAX CONTACTS<sup>5</sup>






<sup>&</sup>lt;sup>1</sup> Loss levels depend on used conductor type at a VSWR of 1.25. More are available on request. Each test was performed with a conductor length of 2 × 5 cm.
<sup>2</sup> IEC 60664-1:2020 (VDE 0110-1:2022-07) see page 179 See page 182 See page 185 Special lines and alternative models on request Clearance and creepage distance between inner conductor and outer conductor


# CABLE ASSEMBLY - MODULE 4 CONTACTS FOR 50 $\Omega$



### PRE-ASSEMBLED MODULES

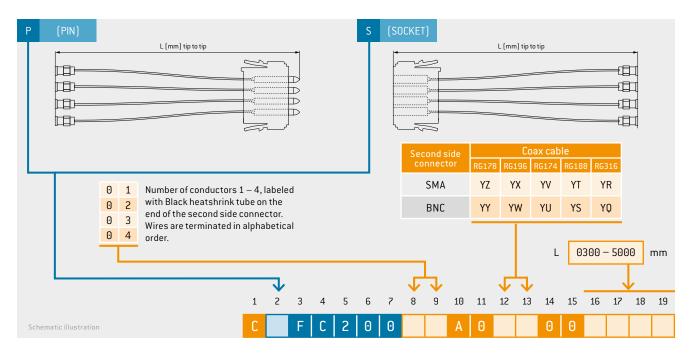

# PRE-ASSEMBLED CONTACTS

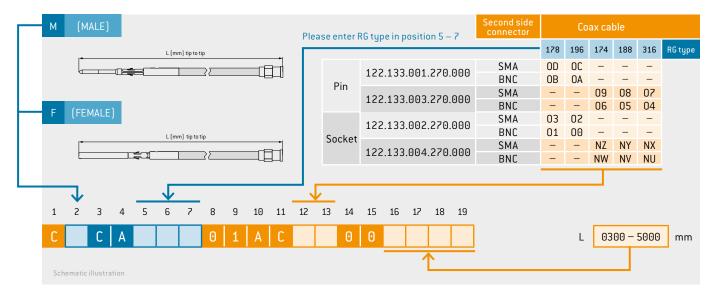

# MODULE 2 CONTACTS FOR 50 $\Omega$



Mating cycles: min. 10,000 Frequency range<sup>1</sup>: 0 – 4 GHz

#### **TECHNICAL NOTES**

• For crimp information, see from page 168

Materials		
Insulator	Thermoplastic acc. to UL 94	
Contact/insulator	Cu alloy / PTFE	
Contact finishing	Gold-plated	

# Voltage data according to IEC 60664-1:2020 [VDE 0110-1:2022-07]<sup>2</sup>

Technical data

Operating voltage	630 V	250 V	
Pollution degree	2	3	
Rated surge voltage	4,00	90 V	
Frequency range <sup>1</sup>	0 – 4 GHz		
Insulation resistance	> 100	ο GΩ	
Clearance distance <sup>6</sup>	3.4 mm		
Creepage distance <sup>6</sup>	3.4	mm	

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	800 V
Test voltage	2,400 V

# Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)<sup>3</sup>


Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	672 V	267 V
Pollution degree	2	3
Test voltage	2,394 V AC	

Description	Part number	Characteristic impedance $\Omega$	Frequency range GHz	Cable <sup>1</sup>	Outer conductor crimp dies for crimping tool 080.000.039.000.000
Pin contact	122.132.001.270.000	50	0.2	RG 178, RG 196	082.000.039.101.000
	122.132.003.270.000		0.4	RG 174, RG 188, RG 316	082.000.039.102.001
	122.132.007.270.000		3.5	RG 58	082.000.039.106.000
	122.132.013.270.000		4	RG223, RG142	082.000.039.108.000
	122.132.002.270.000		0.2	RG 178, RG 196	082.000.039.101.000
Socket contact	122.132.004.270.000	50	0.4	RG 174, RG 188, RG 316	082.000.039.102.001
	122.132.008.270.000		3.5	RG 58	082.000.039.106.000
122.132	122.132.014.270.000		4	RG 178, RG 196	082.000.039.108.000
Crimping tool for inner conductor	080.000.051.000.000				
Positioner for inner conductor	080.000.051.102.000				
Removal tool	087.7CC.690.001.000				

Module 2 contacts	Part number
Insulator	631.120.102.923.000
Dummy contact	021.341.202.946.000

#### HIGH-FREQUENCY CHARACTERISTICS FOR 50 $\Omega$ COAX CONTACTS<sup>5</sup>







 $<sup>^1</sup>$  Loss levels depend on used conductor type at a VSWR of 1.25. More are available on request. Each test was performed with a conductor length of 2 × 5 cm.  $^2$  IEC 60664-1:2020 (VDE 0110-1:2022-07) see page  $\frac{179}{3}$  See page  $\frac{182}{3}$  See page  $\frac{185}{3}$  Special lines and alternative models on request  $^6$  Clearance and creepage distance between inner conductor and outer conductor

## CABLE ASSEMBLY - MODULE 2 CONTACTS FOR 50 $\Omega$



### PRE-ASSEMBLED MODULES

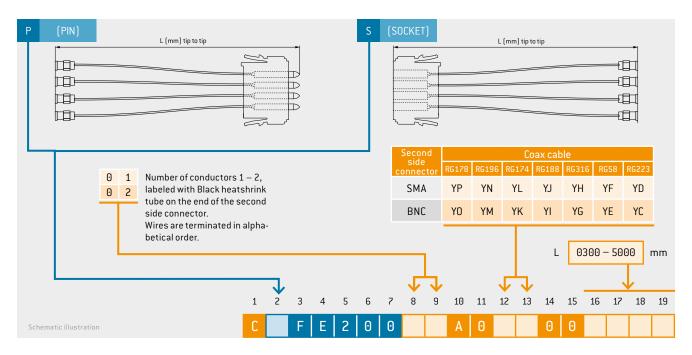

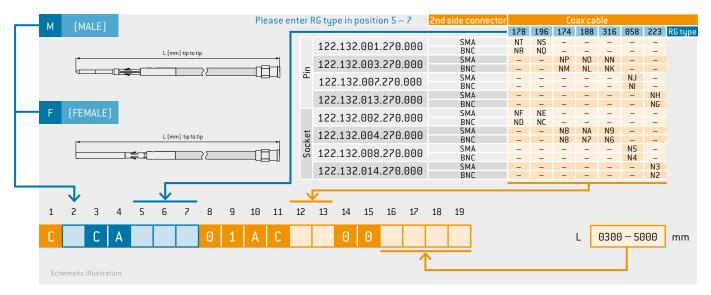

## MODULE 2 CONTACTS FOR 50 $\Omega$ WITH SMA TERMINATION 1



Mating cycles: min. 10,000 Frequency range<sup>1</sup>: 0 – 12 GHz<sup>2</sup>

#### **TECHNICAL NOTES**

• For crimp information, see from page 168

Materials		
Insulator	Thermoplastic acc. to UL 94	
Contact/insulator	Cu alloy / PTFE	
Contact finishing	Gold-plated	

ilisulatoi	acc. to UL 94	
Contact/insulator	Cu alloy / PTFE	
Contact finishing	Gold-plated	
Technical data		

#### Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)

(ADE 0110-1:5055-01)			
Operating voltage	320 V	63 V	
Pollution degree	2	3	
Rated surge voltage	2,500 V		
Frequency range <sup>1</sup>	0 – 12 GHz²		
Insulation resistance	$>$ 100 G $\Omega$		
Clearance distance <sup>6</sup>	1.6 mm		
Creepage distance <sup>6</sup>	1.6 mm		

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	565 V
Test voltage	1,700 V

#### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)5


Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	320 V	63 V
Pollution degree	2	3
Test voltage	1,444 V AC	

Module 2 contacts	Part number
Insulator	631.122.102.923.000
Dummy contact	021.341.202.946.000

Description	Part number	Characteristic impedance Ω	Frequency range GHz
Pin contact	122.143.001.270.000	F0	12 <sup>2</sup>
Socket contact	122.143.002.270.000	50	12 <sup>2</sup>
Removal tool	087.7CC.690.001.000		

#### HIGH-FREQUENCY CHARACTERISTICS FOR 50 $\Omega$ COAX CONTACTS<sup>1</sup>





<sup>1</sup> Loss levels depend on used conductor type at a VSWR of 1.25. More are available on request. Each test was performed with a conductor length of 2 × 5 cm.

 $<sup>^2</sup>$  Frequency range 0 - 16 GHz, if gap between pin and socket frame is < 0.2 mm and particular coax cables are used. Example: docking application

 $<sup>^3</sup>$  IEC 60664-1:2020 (VDE 0110-1:2022-07) see page  $\underline{179}$   $^4$  See page  $\underline{185}$   $^5$  See from page  $\underline{182}$   $^6$  Clearance and Creepage distance between inner conductor and outer conductor



## MODULE 2 CONTACTS FOR 75 $\Omega$



Mating cycles: min. 10,000 Frequency range<sup>1</sup>: 0 – 2.6 GHz

#### **TECHNICAL NOTES**

• For crimp information, see from page 168

Materials		
Insulator	Thermoplastic acc. to UL 94	
Contact/insulator	Cu alloy / PTFE	
Contact finishing	Gold-plated	

Technical data

## Voltage data according to IEC 60664-1:2020

(VDE 0110-1:2022-07)			
Operating voltage	500 V	200 V	
Pollution degree	2	3	
Rated surge voltage	4,000 V		
Frequency range <sup>1</sup>	0 – 2.6 GHz		
Insulation resistance	$>$ 100 G $\Omega$		
Clearance distance <sup>6</sup>	3.1 mm		
Creepage distance <sup>6</sup>	3.1 mm		

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	930 V
Test voltage	2,790 V


### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)<sup>3</sup>

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	612 V	243 V
Pollution degree	2	3
Test voltage	2,251 V AC	

Description	Part number	Characteristic impedance $\Omega$	Frequency range GHz	Cable⁵	Outer conductor crimp dies for crimping tool 080.000.039.000.000
Pin	122.131.003.270.000		2.1	RG 179, RG 187 ST2081 (6G-SDI)	082.000.039.102.001
contact	122.131.009.270.000	75	2.6	RG59/U (Belden) ST2082 (12G-SDI)	082.000.039.109.000
Socket	122.131.004.270.000	75	2.1	RG 179, RG 187 ST2081 (6G-SDI)	082.000.039.102.001
contact	122.131.010.270.000		2.6	RG59/U (Belden) ST2082 (12G-SDI)	082.000.039.109.000
Crimping tool inner conductor	080.000.051.000.000				
Positioner inner conductor	080.000.051.102.000				
Removal	087.7CC.690.001.000				

Module 2 contacts	Part number
Insulator	631.120.102.923.000
Dummy contact	021.341.202.946.000

#### HIGH-FREQUENCY CHARACTERISTICS FOR 75 $\Omega$ COAX CONTACTS<sup>1</sup>



Voltage standing-wave ratio VSWR

1.5
1.4
1.3
1.2
1.0
0.75
1.5
2.25
3

Insertion loss


 $<sup>^1</sup>$  Loss levels depend on used conductor type at a VSWR of 1.25. More are available on request. Each test was performed with a conductor length of 2  $\times$  5 cm.


<sup>&</sup>lt;sup>2</sup> IEC 60564-1:2020 (VDE 0110-1:2022-07) see page 179 <sup>3</sup> See from page 182 <sup>4</sup> See page 185 <sup>5</sup> Special lines and alternative models on request <sup>6</sup> Clearance and Creepage distance between inner conductor and outer conductor

## CABLE ASSEMBLY - MODULE 2 CONTACTS FOR 75 $\Omega$



## PRE-ASSEMBLED MODULES

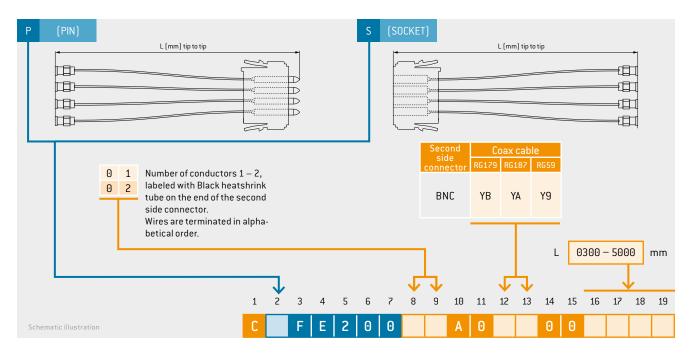

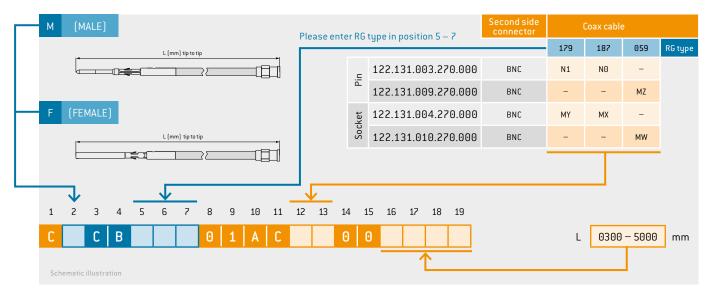

## MODULE 2 CONTACTS FOR PNEUMATIC VALVES [6]

Inner-Ø of tube max. 4 mm, Push-in-Ø max. 6 mm



Operating pressure¹: 12 bar
Mating cycles <sup>2</sup> : minimum 10,000
Tube termination: M5

#### **TECHNICAL NOTES**

- The function dictates that contacts are spring loaded in the mated state. The frame must maintain this spring load with a holding device.
- Vacuum modules and further termination types on request
- No 0, model<sup>3</sup>

Materials		
Insulator	Thermoplastic acc. to UL 94	
Valve body	Cu alloy / blank	
Dummy contact	NBR; sealing material	

Dummy contact	NBR; sealing material	
Technical data		
Mechanical data		
Permissible max. operating pressure	12 bar	

10.4 N / module

Module 2 contacts	Part number	
Insulator	631.120.102.923.000	
Dummy contact	021.341.202.946.000	

Description	Part number	Termination
Plug sleeve (non shut-off)	196.035.001.300.000	
Coupling (non shut-off)	196.035.003.300.000	M5
Coupling (shut-off)	196.035.002.300.000	
Removal tool	087.7CC.680.001.000	

#### FLOW RATE DIAGRAM

Operating force



The flow rate diagram refers to the locking version with a maximum gap between socket and pin piece of  $\leq 0.5$  mm. If the clearance is modified, the drop of pressure increases.


<sup>&</sup>lt;sup>1</sup>Burst pressure min. 40 bar <sup>2</sup>The stated mating cycles are possible if regular maintenance intervals are observed <sup>3</sup> Not suitable for mixtures with over 25% oxygen content or explosive gases.

## CABLE ASSEMBLY - MODULE 2 CONTACTS



Technical data		
Hose type	Polyamide Blue	
Dimension (mm) Outer- $\varnothing$ / Inner- $\varnothing$	6.00 / 2.50	
Hose type	Polyurethane Black	
Dimension (mm) Outer-Ø/Inner-Ø	6.00 / 4.00	
Operating temperature	Polyamide Blue −30 °C to +90 °C	
	Polyurethane Black −35 °C to +60 °C	

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.

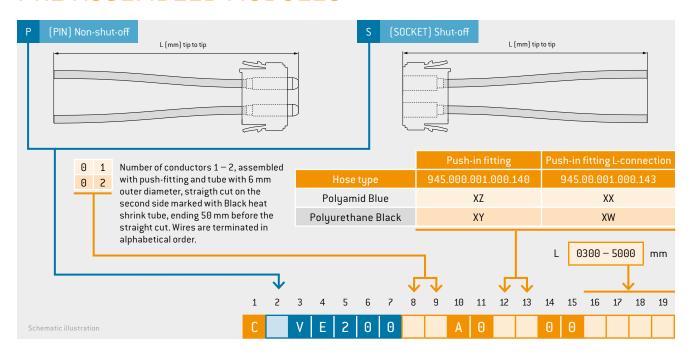

## MODULE 2 CONTACTS FOR PNEUMATIC VALVES [6]

Inner-Ø of tube max. 4 mm, Push-in-Ø max. 6 mm.



Operating pressure: 10 bar	
Mating cycles¹: min. 10,000	
Tube termination: M5 or max. 4 mn	n

#### **TECHNICAL NOTES**

- The function dictates that contacts are spring-loaded in the mated state. The frame must maintain this spring load with a holding device.
- Vacuum modules and further termination types on request
- No 0, model<sup>2</sup>

Materials		
Insulator	Thermoplastic acc. to UL 94	
Valve body	Cu alloy / blank	
Dummy contact	NBR; sealing material / FKM	

Technical data			
Mechanical data Permissible max. operating pressure	10 bar		
Relative operating pressure	-0.8 bar <sup>6</sup>		
Operating force Non shut-off One-sided shut-off Two- sided shut-off	27 N 28 N 29 N		

Module 2 contacts	Part number	
Insulator	631.132.102.923.000	
Dummy contact	021.341.205.946.000	

Description	Part number	Termination diameter (inner diameter)	Termination types see page <u>121</u>	
			1	Ш
Plug sleeve (non shut-off)	196.023.001.300.000	3	•	-
Plug sleeve (non shut-off)	196.024.001.300.000	4	•	-
Coupling (non shut-off)	196.023.003.300.000	3	•	-
Coupling (non shut-off)	196.024.003.300.000	4	•	-
Plug sleeve (shut-off) <sup>4,5</sup>	196.025.014.300.000	M5	-	•
Coupling (shut-off)	196.023.002.300.000	3	•	-
Coupling (shut-off)	196.024.002.300.000	4	•	-
Coupling (shut-off) <sup>2</sup>	196.025.012.300.000	M5	-	•

#### FLOW RATE DIAGRAM




The flow rate diagram refers to the locking version with a maximum gap between socket and pin piece of  $\leq 0.5$  mm. If the clearance is modified, the drop of pressure increases.


<sup>&</sup>lt;sup>1</sup> The stated mating cycles are possible if regular maintenance intervals are observed <sup>2</sup> Not suitable for mixtures with over 25% oxygen content or explosive gases

<sup>&</sup>lt;sup>3</sup> In mated condition or in the case of shut-off variants in unmated condition also <sup>4</sup> Only pluggable on coupling 196.025.012.300.000 <sup>5</sup> Sealing material: FKM

 $<sup>^{\</sup>rm 6}$  Pressure specification as relative value (absolute value: 0.2 bar)

## CABLE ASSEMBLY - MODULE 2 CONTACTS

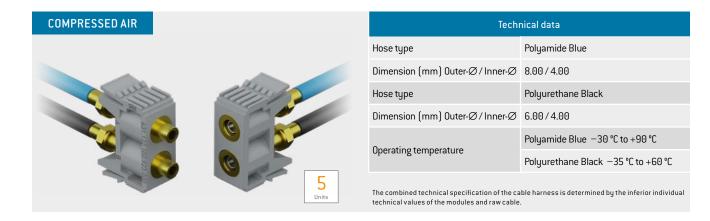

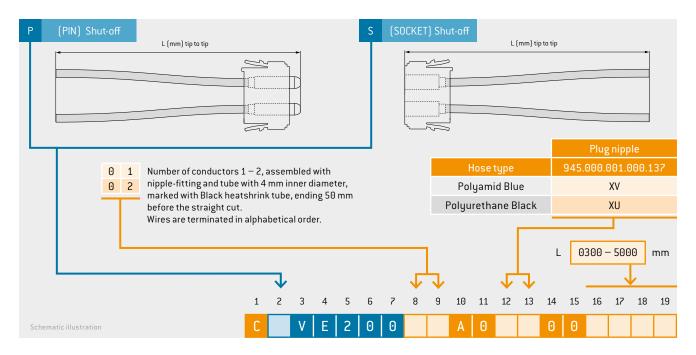

## MODULE 2 CONTACTS FOR FLUID COUPLING





Operating pressure: 10 bar low-leakage model

Mating cycles<sup>1</sup>: min. 10,000

Tube termination: M5

#### **TECHNICAL NOTES**

- The function dictates that contacts are spring loaded in the mated state. The frame must maintain this spring load with a holding device.
- The use of flammable or explosive liquids or gases is not permitted.
- No O<sub>2</sub> model<sup>2</sup>

Materials			
Insulator	Thermoplastic acc. to UL 94		
Fluid coupling	Cu alloy / nickel-plated		
Sealing	Sealing material / FKM		

Module 2 contacts	Part number
Insulator	631.132.102.923.000
Dummy contact	021.341.205.946.000


Description	Part number	Termination
Plug sleeve (shut-off)	196.025.015.338.000	M5
Coupling (shut-off)	196.025.016.338.000	M5

Technical data

М	اءد	hani	ical	data

Permissible max. operating pressure	10 bar
Relative operating pressure	-0.8 bar <sup>4</sup>
Operating force	48 N / module
Tube termination	M5 inside thread for commercially available Push-in terminations


#### FLOW RATE DIAGRAM WATER

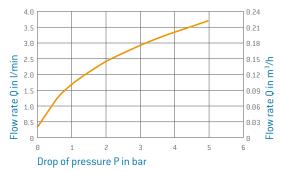

The flow rate diagram refers to the locking version with a maximum gap between socket and pin piece of  $\leq 0.5~\text{mm}.$ 

If the clearance is modified, the drop of pressure increases.


#### FLOW RATE DIAGRAM AIR

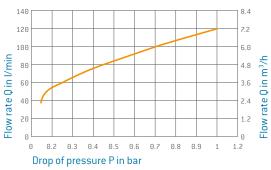


<sup>&</sup>lt;sup>1</sup> The stated mating cycles are possible if regular maintenance intervals are observed <sup>2</sup> Not suitable for mixtures with over 25% oxygen content or explosive gases

<sup>&</sup>lt;sup>3</sup> In unmated condition also <sup>4</sup> Pressure specification as relative value (absolute value: 0,2 bar)

## CABLE ASSEMBLY — MODULE 2 CONTACTS 🐧

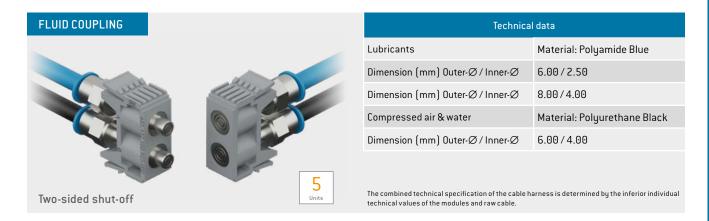

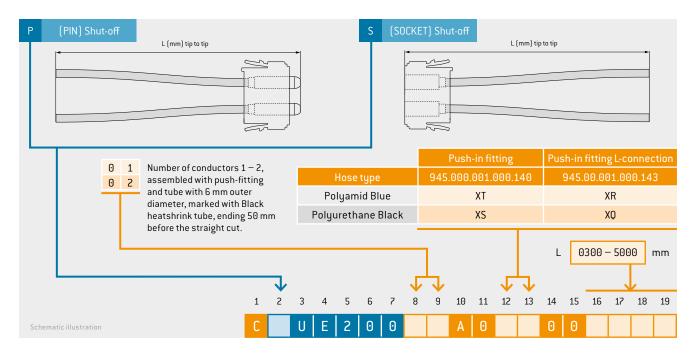

## MODULE 1 CONTACT FOR VACUUM

Inner- $\varnothing$  of tube 16 mm, vacuum -0.8 bar



Relative operating pressure:  $-0.8 \text{ bar}^4$  Mating cycles<sup>1</sup>: min. 10,000

Tube connection: max. Ø 16 mm

#### **TECHNICAL NOTES**

• No O<sub>2</sub> model<sup>2</sup>

	Materials
Insulator	Thermoplastic
Coupling / Plug sleeve	Cu alloy
Sealing	VMQ

Module 1 contact	1 al Ciluitibei
Insulator	631.133.101.923.000

Description	Part number	Inner-Ø of tube in mm
Plug sleeve	196.052.001.300.000	16
Coupling	196.052.002.300.000	16

Technical data		
Mechanical data		
Operating pressure	$-0.8  \text{bar} \left(-0.8  \text{x}  10^5  \text{Pa}\right)$	
Max. pressure drop in 5 s 50 x 10 <sup>-5</sup> bar (50 Pa)		
Operating force	5.2 N / module	
Permissible max. operating pressure	8.5 bar	

 $<sup>^{\</sup>mathrm{1}}$  The stated mating cycles are possible if regular maintenance intervals are observed.

<sup>&</sup>lt;sup>2</sup> Not suitable for mixtures with over 25 % oxygen content or explosive gases. <sup>4</sup> Pressure specification as relative value (absolute value: 0,2 bar)

## M5 TERMINATION ACCESSORIES



#### **TECHNICAL NOTES**

• Tightening torque  $0.9 \pm 0.2 \text{ Nm}$ 


#### TECHNICAL DATA

#### Mechanical data

Permissible operating pressure (static) 0.95-14 bar Operating temperature for Push-in Thread termination

 $-10\,^{\circ}\mathrm{C}$  to  $+80\,^{\circ}\mathrm{C}$ 

Description	Part number	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
		Inner-Ø of tube	Outer-Ø of tube	mm	mm	mm	
		mm	mm	inc	l. sealing was	her	mm
Plug nipple	945.000.001.000.123	2	-	10.2	-	-	-
Plug nipple	945.000.001.000.136	3	-	14.2	-	-	-
Plug nipple	945.000.001.000.137	4	-	15.8	-	-	=
Push-in fitting	945.000.001.000.138	-	3	-	13	-	-
Push-in fitting	945.000.001.000.139	-	4	-	13.2	-	-
Push-in fitting	945.000.001.000.140	-	6	-	14.2	-	-
L connection Push-in	945.000.001.000.141	-	3	-	-	14	11
L connection Push-in	945.000.001.000.142	-	4	-	-	14.9	15.6
L connection Push-in	945.000.001.000.143	-	6	-	-	17.2	16.2

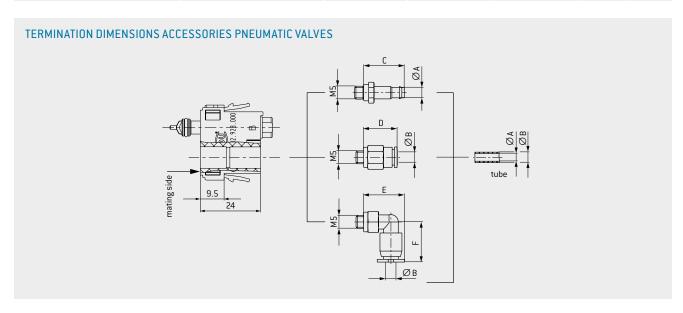

## MODULE FOR MULTI-POSITION SHIELDED FEEDTHROUGH / HIGH-SPEED CONNECTOR

Size 1 (e.g., for use in bus systems)




Mating cycles: min. 10,000 CAT 5, USB® 2.0, USB® 3.2 Gen 1x1, FireWire®, Ethernet, SPE 2 to 14 contacts

#### **TECHNICAL NOTES**

- The inserts listed here for shielded feedthroughs/ high-speed connectors are ideal for all common bus systems, e.g., Profibus®, RS485, FlexRay®, CAN-Bus, and RS232.
- Selected inserts are suitable and qualified for data rates up to 5 Gbit/s, e.g., Gigabit-Ethernet, Fast-Ethernet, IEEE 1394, USB® 2.0, USB® 3.2 Gen 1x1, FireWire® S400 (on request), SPE 10G BASE-T1.

#### HOW TO CONFIGURE YOUR HIGH-SPEED CONNECTOR

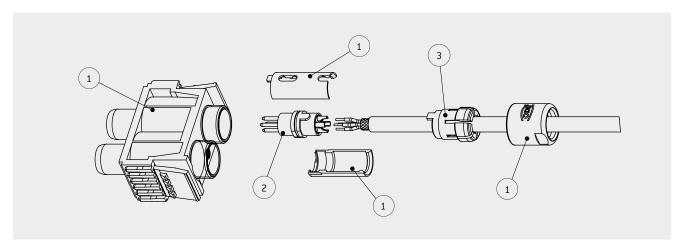

#### **ASSEMBLY SET**

Order	Base parts	Part number
1	Insulator socket incl. 1 socket housing	630.131.101.923.000
1	Insulator pin incl. 1 connector housing	631.131.101.923.000
1	Insulator socket incl. 2 socket housings	630.131.102.923.000
1	Insulator pin incl. 2 connector housings	631.131.102.923.000
2	Insert cpl. solder contacts <sup>1</sup>	See next page
3	Assembly set	See table on the right

Cable-Ø	Part number
mm	
1.5 to 2.1	751.020.188.304.022
2 to 3.2	751.020.188.304.032
3 to 4.2	751.020.188.304.042
4 to 5.2	751.020.188.304.052
5 to 6.2	751.020.188.304.062
6 to 7.2	751.020.188.304.072
7 to 7.7	751.020.188.304.077

¹Insert for crimp contacts on request ² Single Pair Ethernet according to IEC 63171-6:2019 (IEEE 802.3bp) contacts on request

#### VIEW PIN INSULATION BODY

CONTACT ARRANGE-MENTS



















 2 contacts
 3 contacts
 4 contacts
 5 contacts
 6 contacts
 7 contacts
 8 contacts
 8 contacts
 10 contacts
 14 contacts

 SPE 10G
 CAT 5
 CAT 5
 USB®


 BASE-T1
 USB® 2.0
 3.2 Gen 1x1

Number of contacts	Contact-Ø mm	Termination cross- section AWG	Rated voltage <sup>1</sup> V	Rated surge voltage <sup>1</sup> kV	Pollution degree <sup>1</sup>	Nominal voltage <sup>2</sup> V AC	Model	Cate- gory³	Insert cpl. <sup>4</sup> part number	Total mating force N	Total sliding force N
INSERT W	INSERT WITH ODU TURNTAC® (MATING CYCLES MIN. 10,000)										
2	1.3	20	32	2	2	550	Pin Socket	-	701.844.724.002.200 701.744.724.002.200	8.6	7.1
2	0.7	22	32	1.5	2	300	Pin Socket	SPE 10G BASE-T1	701.848.724.002.D00 701.748.724.002.D00	6.1	5.1
3	1.3	20	32	1.5	2	500	Pin Socket	-	701.844.724.003.200 701.744.724.003.200	10.4	8.7
4	0.9	22	40	2	2	500	Pin Socket	CAT 5 up to 100 Mbit/s	701.849.724.004.200 701.749.724.004.200	8.3	6.9
4	0.9	22	40	2	2	500	Pin Socket	USB <sup>®</sup> 2.0	701.849.724.004.D00 701.749.724.004.D00	8.3	6.9
5	0.9	22	32	1.5	2	450	Pin Socket	-	701.849.724.005.200 701.749.724.005.200	9.1	7.6
6	0.7	22	32	1.5	2	400	Pin Socket	-	701.848.724.406.200 701.748.724.406.200	8.3	7.0
7	0.7	22	32	1.5	2	400	Pin Socket	-	701.848.724.407.200 701.748.724.407.200	8.9	7.4
8	0.7	22	10	1.2	2	333	Pin Socket	-	701.848.724.408.200 701.748.724.408.200	9.5	7.9
8	0.5	26	32	1.5	2	333	Pin Socket	CAT 5 up to 1 Gbit/s	701.841.724.408.D00 701.741.724.408.D00	9.3	7.8
10	0.5	28	25	1.5	2	333	Pin Socket	-	701.841.724.010.400 701.741.724.010.200	10.4	8.7
10	6 × 0.3 4 × 0.5	28 24	7.5	1.2	2	100	Pin Socket	USB® 3.2 Gen 1x1	701.831.724.410.D00 701.731.724.410.D00	12.6	10.5
14	0.5	28	25	1.5	2	300	Pin Socket	-	701.841.724.014.400 701.741.724.014.200	15.7	13.1

<sup>&</sup>lt;sup>4</sup> Insert for crimp version on request


## CABLE ASSEMBLY — SHIELDED FEEDTHROUGH FOR DATA PROTOCOLS



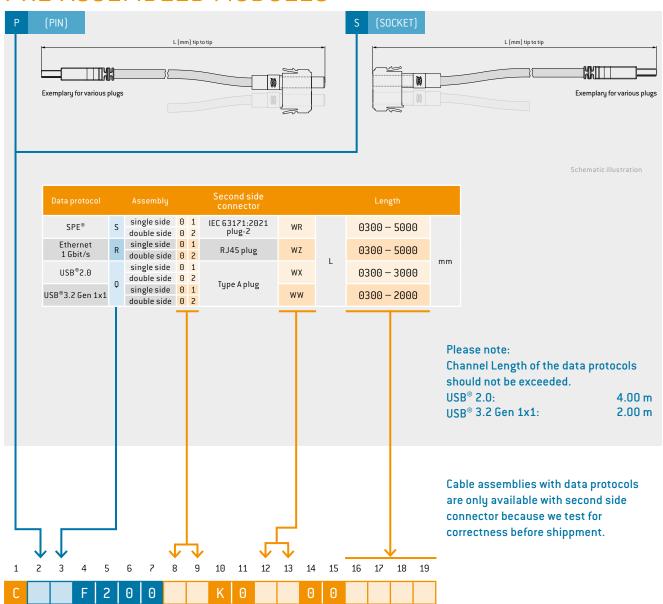

## CABLE ASSEMBLY — SHIELDED FEEDTHROUGH WITH SIGNAL CABLES



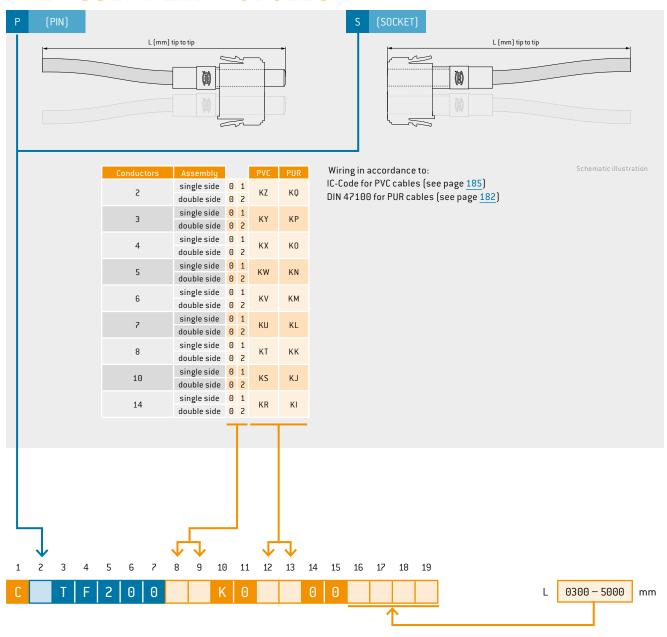

## MODULE FOR MULTI-POSITION SHIELDED FEEDTHROUGH/HIGH-SPEED CONNECTOR

Size 2 (e.g., for use in bus systems), 1 feedthrough




Mating cycles: min. 10,000 HDMI® up to 48 Gbit/s DisplayPort® up to 40 Gbit/s USB® up to 10 Gbit/s 3 to 22 contacts

#### **TECHNICAL NOTES**

- The inserts listed here for shielded feedthroughs/high-speed connectors are ideal for all common bus systems with transfer rates,
   e.g., Profibus®, RS485, FlexRay®, CAN-Bus, and RS232.
- Selected inserts are suitable and qualified for data rates up to 10 Gbit/s, e.g. HDMI® up to 48 Gbit/s, DisplayPort® up to 40 Gbit/s, USB® up to 10 Gbit/s

#### HOW TO CONFIGURE YOUR HIGH-SPEED CONNECTOR

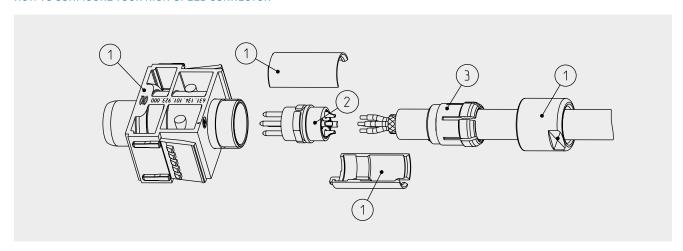

#### Order Base parts Part number Insulator socket 630.134.101.923.000 1 incl. socket housing Insulator pin 631.134.101.923.000 1 incl. connector housing 2 Insert cpl. solder contacts1 See next page 3 Assembly set See table on the right

#### **ASSEMBLY SET**

Cable-Ø mm	Part number
2 to 3.2	752.020.188.304.032
3 to 4.2	752.020.188.304.042
4 to 5.2	752.020.188.304.052
5 to 6.2	752.020.188.304.062
6 to 7.2	752.020.188.304.072
7 to 8.2	752.020.188.304.082
8 to 9.2	752.020.188.304.092
9 to 9.9	752.020.188.304.099

<sup>&</sup>lt;sup>1</sup>Insert for crimp contacts on request

#### **VIEW PIN INSULATION BODY**

CONTACT ARRANGE-**MENTS** 





















CAT 5

 $3 \ contacts \quad 4 \ contacts \quad 6 \ contacts \quad 7 \ contacts \quad 8 \ contacts \quad 12 \ contacts \quad 14 \ contacts$ CAT 5, CAT 6<sub>A</sub>,

16 contacts 19 contacts HDMI® 2.0


22 contacts HDMI® up to 48 Gbit/s DisplayPort® up to 40 Gbit/s USB® up to 10 Gbit/s


Number of contacts	Contact-Ø mm	Termination cross- section AWG	Rated voltage <sup>1</sup> V	Rated surge voltage <sup>1</sup> kV	Pollution degree <sup>1</sup>	Nominal voltage <sup>2</sup> V AC	Model	Category <sup>3</sup>	Insert cpl. <sup>4</sup> part number	Total mating force N	Total sliding force N
INSERT W	INSERT WITH ODU TURNTAC® (MATING CYCLES MIN. 10,000)										
3	1.6	18	- 125	2.5	- 2	800	Pin Socket	+	702.851.724.003.200 702.751.724.003.200	13.9	11.6
4	1.3	20	- 160	2.5	_ 2	650	Pin Socket	CAT 5 up to 100 Mbit/s	702.844.724.004.200 702.744.724.004.200	13.1	10.9
6	1.3	20	- 80	2	_ 2	600	Pin Socket		702.844.724.006.200 702.744.724.006.200	16.2	13.5
ь	1.5	18	32	1.5	2	366	Pin Socket	+	702.844.724.406.200 702.744.724.406.200	16.2	13.5
	4.3	20	- 80	2	- 2	600	Pin Socket		702.844.724.007.200 702.744.724.007.200	17.8	14.8
7	1.3	18	32	1.5	2	366	Pin Socket	-	702.844.724.407.200 702.744.724.407.200	17.8	14.8
8	0.9	22	- 40	2	– 2	500	Pin Socket	CAT 6 <sub>A</sub>	702.849.724.008.D00 702.749.724.008.D00	16.2	13.5
12	0.7	26	- 32	2	_ 2	450	Pin Socket	-	702.848.724.012.200 702.748.724.012.200	16.1	13.4
14	0.7	26	32	1.5	2	400	Pin Socket	-	702.848.724.014.200 702.748.724.014.200	17.6	14.7
16	0.5	26	- 32	1.5	_ 2	250	Pin Socket	HDMI 2.0	702.841.724.416.D00 702.741.724.416.D00	19.1	15.9
19	0.7	26	32	1.5	2	333	Pin Socket	-	702.848.724.019.200 702.748.724.019.200	21.4	17.9
22	0.5	22/28	-	1.2	-	200	pin	HDMI <sup>®</sup> up to 48 Gbit/s DisplayPort <sup>®</sup>	702.841.724.022.D00	23.7	19.8
LL	0.5	22/20	6.3	1.2	2	200	socket	up to 40 Gbit/s USB® up to 10 Gbit/s	702.741.724.022.D00	23.1	13.0
INSERT W	VITH ODU S	PRINGTAC	(MATIN	G CYCLES	S MIN. 10,	000)					
8	0.76	22	- 40	2	- 2	550	pin socket	CAT 5	702.842.724.008.D00 702.742.724.008.D00	23.5	19.6

<sup>&</sup>lt;sup>1</sup> According to IEC 60664-1:2020 (VDE 0110-1:2022-07), see page 179 <sup>2</sup> According to EIA-364-20F:2009 <sup>3</sup> Classification according to ISO/IEC 11801:2017-1:2017-11

<sup>&</sup>lt;sup>4</sup> Insert for crimp version on request

## CABLE ASSEMBLY FOR — SHIELDED FEEDTHROUGH FOR DATA PROTOCOLS 10

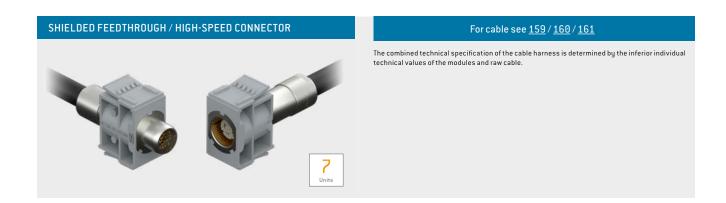

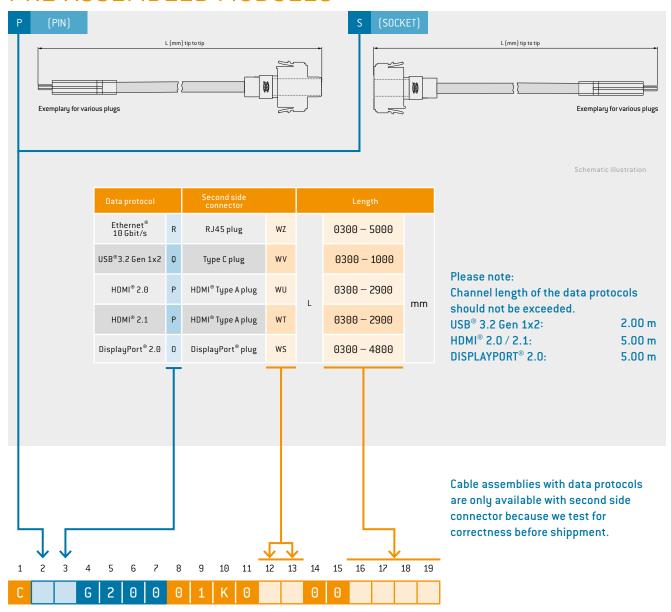


## CABLE ASSEMBLY — SHIELDED FEEDTHROUGH WITH SIGNAL CABLES



#### For cable specification, see page 164

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.

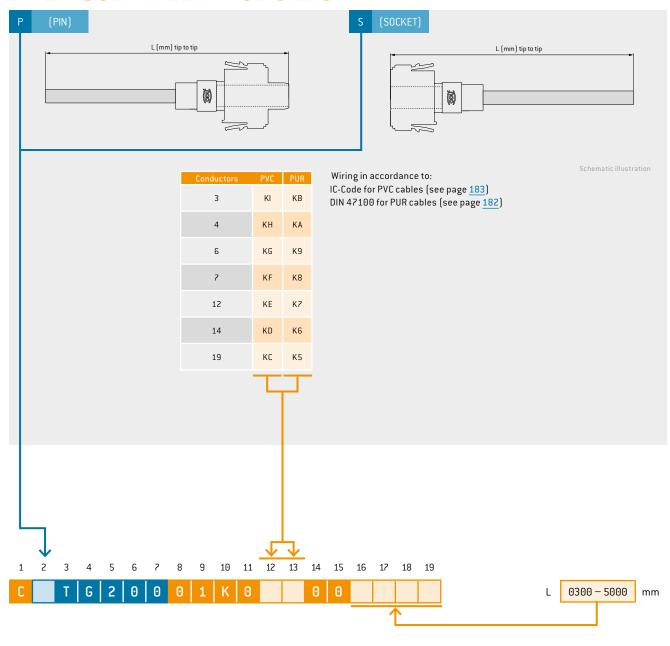

## MODULE FOR INDUSTRIAL ETHERNET® RJ45/10 GBIT/S

STEADYTEC® Technology



Mating cycles: min. 5,000 CAT 6, CAT  $_{\rm A}$  8 contacts

#### **TECHNICAL NOTES**

- Data transmission
- This module is suitable for transmitting data of CAT 6 according to ANSI/TIA/EIA-568-C.2 and CAT 6, according to ANSI/TIA-568.2-D.
   Suitable for the transmission of 10 Gbit/s according to IEEE 802.3an.
- 8-way RJ45 field connector and RJ45 connector insert CAT 6<sub>A</sub>
   (assembly w/o special tools) for stranded and solid wire cables
- Improved vibration and shock resistance by, for example, using 4 springs at the shrouds in the RJ45 socket of the RJ45 module CAT  $6_a$  and RJ45 coupling CAT  $6_a$
- Multi-port capable

Materials			
Surface	Sn		

Technical data				
Contact resistance	$<$ 20 m $\Omega$			
Insulation resistance	$>$ 500 m $\Omega$			
Mating cycles	min. 5,000			
Temperature range	−40 °C to +70 °C			

#### Dielectric strength

Contact – contact	> 1,000 V, DC
Contact – shield	> 1,500 V, DC
Current-carrying capacity	1 A


#### Transfer impedance

at 1 MHz	< 100 m $\Omega$
at 10 MHz	$<$ 200 m $\Omega$
at 80 MHz	$<$ 1,600 $m\Omega$

Multi-position module	Part number
Insulator pin	631.130.101.923.000
Insulator socket	630.130.101.923.001

Description	Part number	Category	Termination	
			AWG / mm	
Coupling for RJ45	923.000.005.000.145		RJ45, 8 contacts	
	923.000.005.000.146	TIAA		
Socket insert	923.000.005.000.147	TIA B	22 – 26	
	923.000.005.000.148	Profinet®		
Connectorinsert	923.000.005.000.149	TIAA/TIAB/ Profinet®	22 – 26	

#### **NEXT**

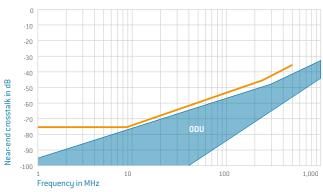



# MODULE 4 CONTACTS FOR FIBER OPTIC GOF



Physical contact Mating cycles: min. 1,000 Polish: PC / APC

#### **TECHNICAL NOTES**

 The function dictates that contacts are spring loaded in the mated state. The frame must maintain this spring load with a holding device.

Mate	Materials				
Insulator	Thermoplastic acc. to UL 94 Glass-fiber reinforced acc. to UL 94				
Fiber optic contact	PARA, stainless steel, Cu alloy, ceramic				
Type of fiber GOF Singlemode Multimode	9/125 μm 50/125 μm				

Description	Part number
Insulator pin	631.136.104.923.000
Insulator socket	630.136.104.923.000
Removal tool	087.7CC.125.001.000


Contacts only available as pre-assembled solution. See next page!

#### Technical data


#### Mechanical data


Max. insertion loss	0.5 dB
Temperature range	-40 °C to +85 °C

## CABLE ASSEMBLY — MODULE 4 CONTACTS

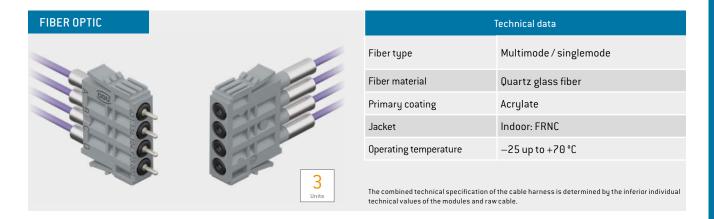


## PRE-ASSEMBLED MODULES

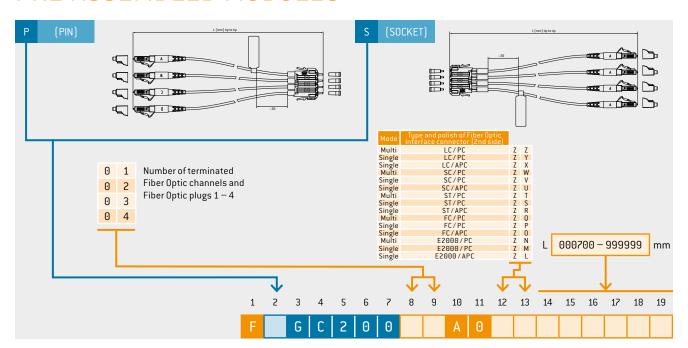

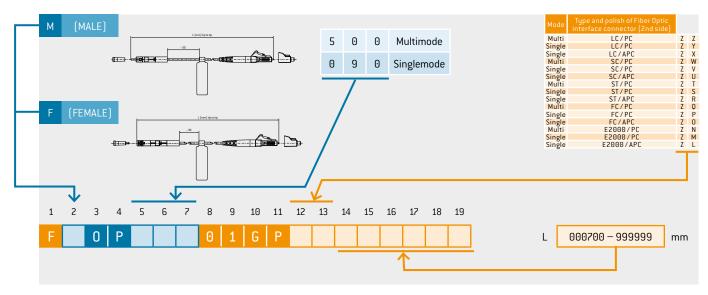

# MODULE 4 CONTACTS FOR FIBER OPTIC GOF

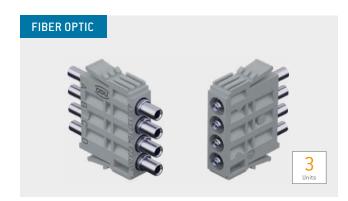

## Expanded Beam Mating cycles: min. 10,000

#### **TECHNICAL NOTES**

• The function dictates that contacts are spring loaded in the mated state. The frame must maintain this spring load with a holding device.

Mate	rials
Insulator	Thermoplastic acc. to UL 94
Fiber optic contact	Cu alloy, stainless steel, ceramic
Type of fiber GOF Multimode	50/125 μm

Description	Part number
Insulator pin (suitable for female contacts)	631.137.104.923.000
Insulator socket (suitable for male contacts)	630.137.104.923.000
Removal tool	087.7CC.125.001.000


Contacts only available as pre-assembled solution. See next page!

#### Technical data


#### Mechanical data


Insert loss	≤ 1.5 dB
Return loss	≥ 32.0 dB (MM)
Operating temperature	-40 °C to +85 °C

## CABLE ASSEMBLY — MODULE 4 CONTACTS

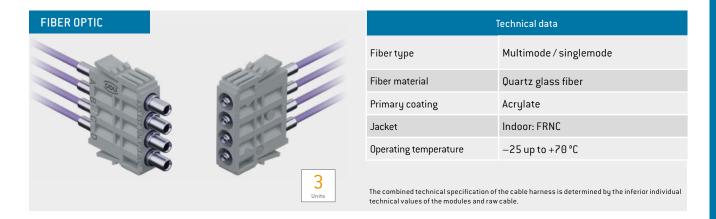

## PRE-ASSEMBLED MODULES

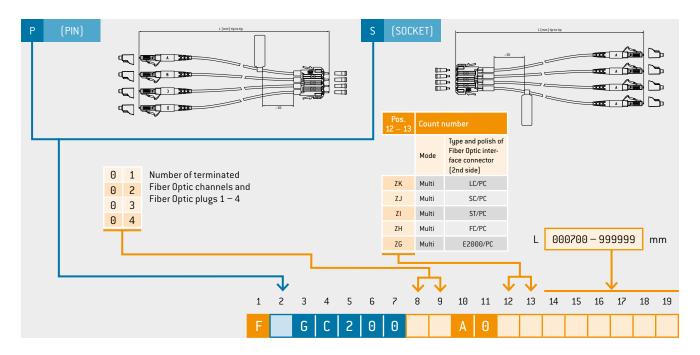

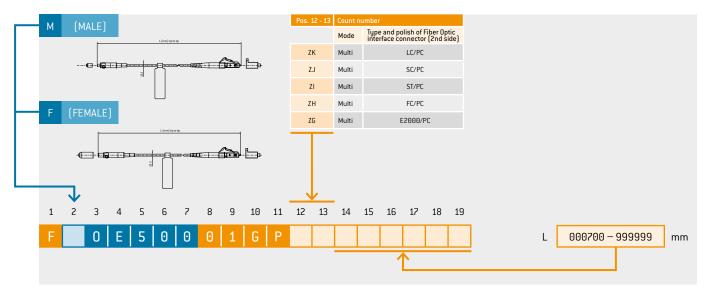

# MODULE 5 CONTACTS FOR FIBER OPTIC POF



### Polymere Optical Fiber Mating cycles: min. 10,000

#### **TECHNICAL NOTES**

• The function dictates that contacts are spring loaded in the mated state. The frame must maintain this spring load with a holding device.

Mate	rials
Insulator	Thermoplastic acc. to UL 94
Fiber optic contact	Cu alloy, stainless steel
Type of fiber POF	980 / 1,000 µm

Techr	nical	data
	u.	uutu


#### Mechanical data

POF	1 mm
Outer diameter cable	2.2 – 2.3 mm
Insertion loss (typical)	≤ 1.5 dB
Total mating force (average)	<17.5 N per module
Operating temperature (depending on fiber) Standard fiber	−40°C to +85°C
Mating cycles	min. 10,000


Technical data	Part number
Insulator	631.112.105.923.000


Description	Part number
Pin contact 980 / 1,000 μm	196.503.002.204.000
Socket contact 980 / 1,000 µm	196.503.001.204.000
Processing set (Multi-purpose and crimping tool)	080.000.048.000.000
Cutting / stripping universal pliers	080.000.048.100.000
Crimping tool	080.000.048.300.000
Removal tool	087.7CC.200.003.000

## CABLE ASSEMBLY MODULE 5 CONTACTS

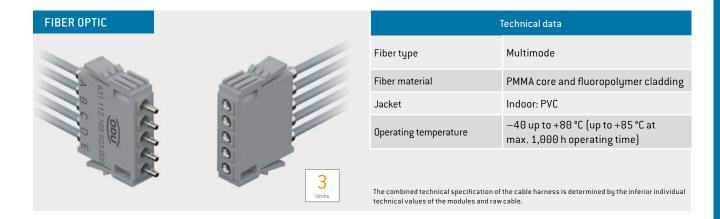

## PRE-ASSEMBLED MODULES

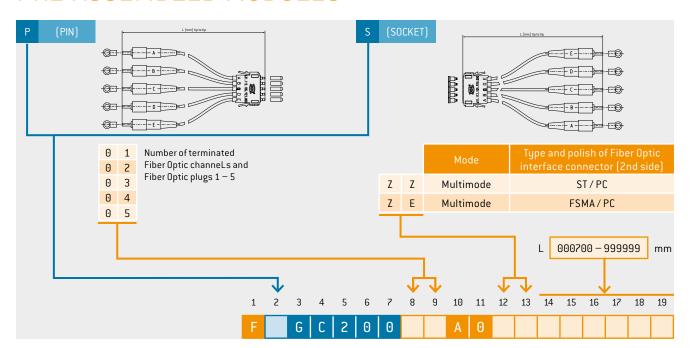

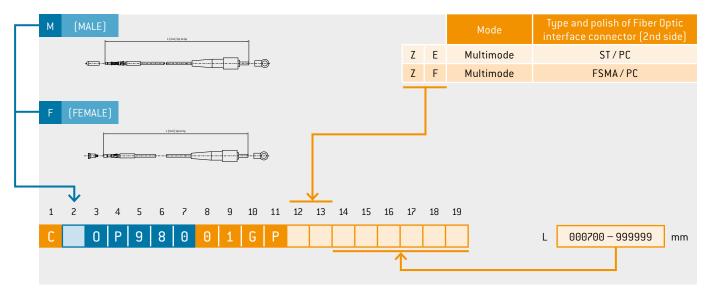

## **MODULE 2 CONTACTS**

#### ODU LAMTAC® (contact with lamella technology)



Contact diameter: 5 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 108 A

#### **TECHNICAL NOTES**

Module 2 contacts

178.879.100.201.000

087.7CC.680.001.000

Insulator

Socket contact

Removal tool

Dummy contact

• The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be  $\,$ reduced according to VDE 0298-4:2023-06 (see page 186).

Part number

631.120.102.923.000 021.341.202.946.000

• For crimp information, see from page 168

Mate	rials
Insulator	Thermoplastic acc. to UL 94
Contact body	Cu alloy
Contact lamella	CuBe alloy
Contact finishing	Silver-plated

Techni	cal data	
Voltage data according to (VDE 0110-1:2022-07) <sup>2</sup>	oltage data according to IEC 60664-1:2020 /DE 0110-1:2022-07] <sup>2</sup>	
Operating voltage	400 V	160 V
Pollution degree	2	3
Rated surge voltage	4,000 V	3,000 V
Clearance distance	3.1	mm
Creepage distance	3.1	mm

9	
.60 V	
3	

Бозеприон	T di Villania di	Conductor cross- section <sup>5</sup> mm <sup>2</sup>	Single contact A	Module fully equipped A	continuous current <sup>1</sup> Single contact A	Contact resistance mΩ
Pin contact	185.485.000.201.000	16	68	68	108	0.2
Socket contact	178.880.100.201.000	16	00	66	108	0.2
Pin contact	185.484.000.201.000	10	56	56	90	0.2

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	975 V
Test voltage	2,925 V

#### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)3

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	611 V	485 V
Pollution degree	2	3
Test voltage	2,251 V	/ AC

<sup>&</sup>lt;sup>1</sup>For a definition of max. continuous current, see page 188 <sup>2</sup>IEC 60664-1:2020 (VDE 0110-1:2022-07) see page 179 <sup>3</sup> See page 182 <sup>4</sup> See page 185


Fine wire acc. to IEC 60228:2004 (VDE 0295:2005-09; class 5 Determined according to IEC 60512-5-2:2002 at increased temperature 45 K


## CABLE ASSEMBLY - MODULE 2 CONTACTS



Technical data wires 10 / 16 mm² / AWG 8 / 6, see page <u>163</u>		
Conductor	TPC — tin plated copper acc. to DIN EN 13602:2013-09	
Insulation	UL-PVC +105 °C (UL-Style 1015)	
Temperature range in motion	−10 up to +105 °C	
Temperature range at rest	−30 up to +105 °C	
Test voltage	2,000 V/AC (UL-Style 1015)	
Operating voltage	600 V (UL-Style 1015)	
The combined technical specification of the cable harness is determined by the inferior individual		

## PRE-ASSEMBLED MODULES

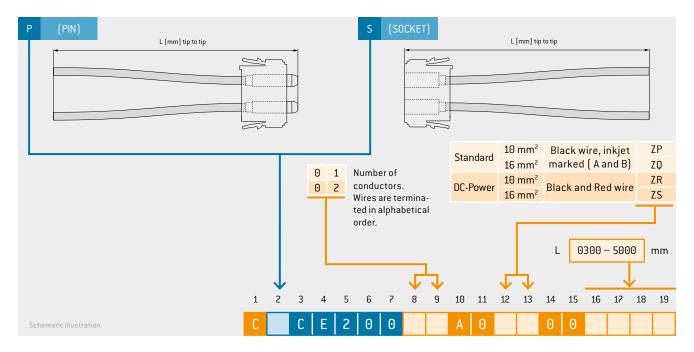

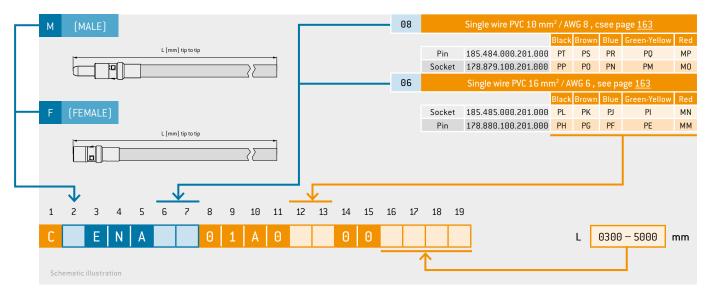

## **MODULE 2 CONTACTS**

#### ODU LAMTAC® (contact with lamella technology)



Contact diameter: 8 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 154 A

#### **TECHNICAL NOTES**

Module 2 contacts

• The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be  $\,$ reduced according to VDE 0298-4:2023-06 (see page 186).

Part number

• For crimp information, see from page 168

Materials		
Insulator	thermoplastic acc. to UL 94	
Contact body	Cu alloy	
Contact lamella	CuBe alloy	
Contact finishing	silver-plated	

Insulator	sulator thermoplastic		cket		630.114.102.923.000		
Cantacthadu		Insulator pin			631.114.102.923.000		
Contact body	Cu alloy	Dummy contact			021.341.203.946.000		
Contact lamella	CuBe alloy	Dulling con	tact		021.541.205	.540.000	
Contact finishing	silver-plated						
	1 00	Description	Part number	cross- mm <sup>2</sup>	Nominal current⁵	Max. continuou	

Techni	cal data	
Voltage data according to (VDE 0110-1:2022-07) <sup>2</sup>	IEC 60664-1:	2020
Operating voltage	400 V	160 V
Pollution degree	2	3
Rated surge voltage 3,000 V		
Clearance distance	2.3	mm
Creepage distance	2.4	mm

Description	Part number	ross-	Nominal current <sup>6</sup>		Max. continuous	Cm Cm
		Conductor cross- section <sup>5</sup> mm <sup>2</sup>	Single contact A	Module fully equipped A	current <sup>1</sup> Single contact A	Contact resistance r
Pin contact	181.874.100.200.001	25	405	100	454	0.2
Socket contact	178.874.100.201.001	25	105	100	154	0.2
Pin contact	181.875.100.200.001	16	90	85	133	0.2
Socket contact	178.875.100.201.001					0.2
Assembly tool	598.054.004.000.000					
Torx bit TX10 Assembly tool	598.054.104.000.000					

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	700 V
Test voltage	2,100 V

#### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)3

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	537 V	428 V
Pollution degree	2	3
Test voltage	1,844\	/ AC


<sup>&</sup>lt;sup>1</sup>For a definition of max. continuous current, see page 188 <sup>2</sup> IEC 60664-1:2020 (VDE 0110-1:2022-07) see page 179 <sup>3</sup> See page 182 <sup>4</sup> See page 185 <sup>5</sup> Fine wire acc. to IEC 60228:2004 (VDE 0295:2005-09; class 5) <sup>6</sup> Determined according to IEC 60512-5-2:2002 at increased temperature 45 K


## CABLE ASSEMBLY - MODULE 2 CONTACTS



Technical data wires $16/25  \text{mm}^2/AWG6/4$ , see page $\underline{163}$			
Conductor	TPC — tin plated copper acc. to DIN EN 13602:2013-09		
Insulation	UL-PVC +105 °C (UL-Style 1015)		
Temperature range in motion	-10 up to $+105$ °C		
Temperature range at rest	−30 up to +105 °C		
Test voltage	2,000 V/AC (UL-Style 1015)		
Operating voltage 600 V (UL-Style 1015)			
The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.			

## PRE-ASSEMBLED MODULES

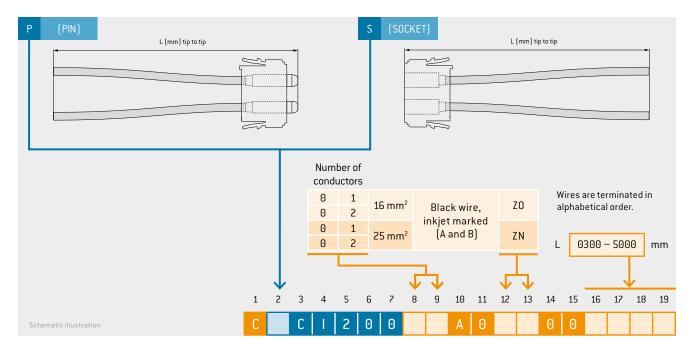

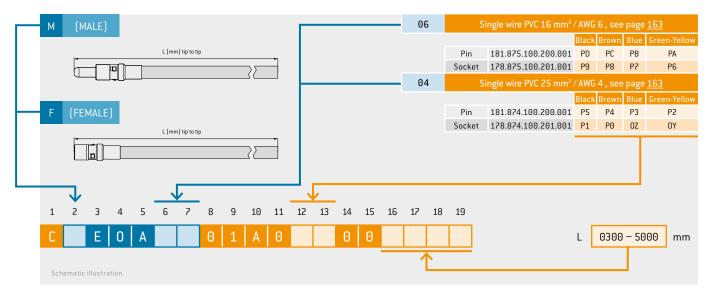

## **MODULE 1 CONTACT**

#### ODU LAMTAC® (contact with lamella technology)



Contact diameter: 12 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>1</sup>: 225 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be  $\,$ reduced according to VDE 0298-4:2023-06 (see page 186).
- For crimp information, see from page 168

Materials			
Insulator	Thermoplastic acc. to UL 94		
Contact body	Cu alloy		
Contact lamella	CuBe alloy		
Contact finishing	Silver-plated		

Insulator	acc. to UL 94	
Contact body	Cu alloy	
Contact lamella	CuBe alloy	
Contact finishing	Silver-plated	
Technical data		

### Voltage data according to IEC 60664-1:2020

(VDE 0110-1:2022-07)°		
Operating voltage	2,500 V	1,000 V
Pollution degree	2	3
Rated surge voltage	10,0	00 V
Clearance distance	13.5	mm
Creepage distance	13.5	mm

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	850 V	
Test voltage	2,550 V	

#### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03) $^3$

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	2,700 V	1,071 V
Pollution degree	2	3
Test voltage	6,388 V AC	

Module 1 contact	Part number Part number		
Insulator socket	630.115.101.923.000		
Insulator pin	631.115.101.923.000		

Description	Part number	ctor on <sup>5</sup> mm²	Nominal current <sup>6</sup>	Max. continuous current <sup>1</sup>	Contact resistance
		Conductor cross-section <sup>5</sup> mm <sup>2</sup>	Single contact A	Single contact A	mΩ
Pin contact	181.943.100.200.001	F0	455	225	
Socket contact	178.943.100.201.001	50	155	225	
Pin contact	181.945.100.200.001	35	135	195	
Socket contact	178.953.100.201.001	35	135	192	
Pin contact	181.944.100.200.001	25	115	167	0.1
Socket contact	178.948.100.201.001	23	115	107	0.1
Pin contact		16	96	144	
Socket contact	on request	10	36	144	
Pin contact	on request	10	71	106	
Socket contact		10	10 71	106	
Assembly tool	598.054.006.000.000				
Torx bit TX20 Assembly tool	598.054.105.000.000				

<sup>&</sup>lt;sup>1</sup>For a definition of max. continuous current, see page 188 <sup>2</sup> IEC 60664-1:2020 (VDE 0110-1:2022-07) see page 179 <sup>3</sup> See page 182 <sup>4</sup> See page 185


Fine wire acc. to IEC 60228:2004 (VDE 0295:2005-09; class 5) Determined according to IEC 60512-5-2:2002 at increased temperature 45 K


## CABLE ASSEMBLY - MODULE 1 CONTACT



Technical data wires 25 / 35 / 50 mm² / AWG 4 / 2 / 1, see page <u>163</u>		
Conductor	TPC – tin plated copper acc. to DIN EN 13602:2013-09	
Insulation	UL-PVC +105 °C (UL-Style 1015/1569)	
Temperature range in motion	−10 up to +105 °C	
Temperature range at rest	−30 up to +105 °C	
2000 V/AC for 25 mm² / AWG4 Test voltage 2500 V/AC for 35 / 50mm² / AWG2 / 1 (UL-Style 1015)		
Operating voltage	600 V (UL-Style 1015)	
The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.		

## PRE-ASSEMBLED MODULES

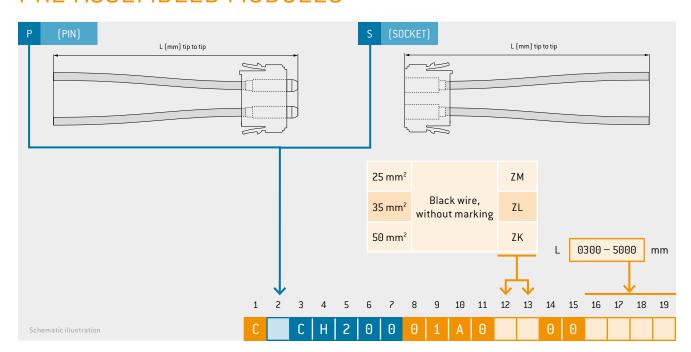

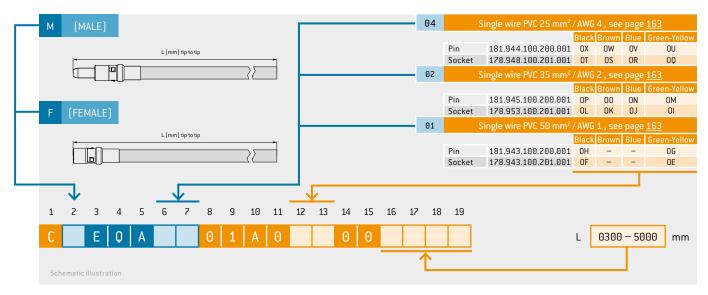

## MODULE 3 CONTACTS 1



Contact diameter: 3.5 mm Mating cycles: min. 10,000 Current-carrying capacity<sup>6</sup>: 58 A

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts or fully equipped modules. For use in connector systems, the load should be reduced according to VDE 0298-4:2023-06 (see page <u>186</u>).
- For crimp information, see from page <u>168</u>

Materials		
Insulator	Thermoplastic acc. to UL 94	
Contact/insulator	Cu alloy	
Contact finishing	Gold-plated	

Module 3 contacts	Part number
Insulator socket	630.113.103.923.000
Insulator pin	631.113.103.923.000
Dummy contact	021.341.201.946.000

## Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)<sup>2</sup>

Technical data

Operating voltage	2,500 V	1,000 V
Pollution degree	2	3
Rated surge voltage	10,000 V	
Clearance distance	16.3 mm	
Creepage distance	16.3 mm	

#### Voltage data according to MIL<sup>4</sup>

Operating voltage	3,750 V
Test voltage	11,250 V

## Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)<sup>3</sup>

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	3,260 V	1,276 V
Pollution degree	2	3
Test voltage	7,514 V AC	


Description	Part number	ross- nm²	ion	Nominal current <sup>6</sup>		Max. continuous current¹	t Gm 8
		Conductor cross- section <sup>5</sup> mm <sup>2</sup>	Termination AWG	Single contact A	Module fully equipped A	Single contact A	Contact resistance mΩ
Pin contact short	185.443.000.270.000						
Pin contact long	185.442.000.270.000	6	10	39	30	58	0.4
Socket contact	177.058.000.270.000						
Pin contact short	185.461.000.270.000						
Pin contact long	185.460.000.270.000	4	12	39	30	58	0.4
Socket contact	177.059.000.270.000						
Pin contact short	185.463.000.270.000						
Pin contact long	185.462.000.270.000	2.5	14	25	21	37	0.4
Socket contact	177.060.000.270.000						
Removal tool	087.7CC.350.001.000						

For Push-Lock only with max. 2,5 mm<sup>2</sup> possible, if PE grounding is needed.

 $<sup>^1</sup>$ For a definition of max. continuous current, see page  $\underline{188}^{\,2}$  IEC 60664-1:2020 (VDE 0110-1:2022-07) see page  $\underline{179}^{\,3}$  See page  $\underline{182}^{\,4}$  See page  $\underline{185}^{\,4}$ 

<sup>&</sup>lt;sup>5</sup>Fine wire acc. to IEC 60228:2004 (VDE 0295:2005-09; class 5) Determined according to IEC 60512-5-2:2002 at increased temperature 45 K


# CABLE ASSEMBLY — MODULE 3 CONTACTS [6]

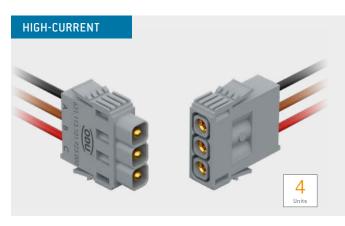


Technical data wires 2,5 / 6mm² / AWG10 / 14, see page <u>163</u>		
Conductor	TPC – tin plated copper acc. to DIN EN 13602:2013-09	
Insulation	UL-PVC +105 °C (UL-Style 1015 / 1569)	
Temperature range in motion	−10 up to +105 °C	
Temperature range at rest	−30 up to +105 °C	
Test voltage	2000 V/AC for 6 mm²/ AWG10 (UL-Style 1015) 3000 V/AC for 2.5 mm²/ AWG14 (UL-Style 1569)	
Operating voltage	600 V for 6 mm² / AWG10 (UL-Style 1015) 300 V for 2.5 mm² / AWG14 (UL-Style 1569)	
The second state of the se		

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.

# PRE-ASSEMBLED MODULES

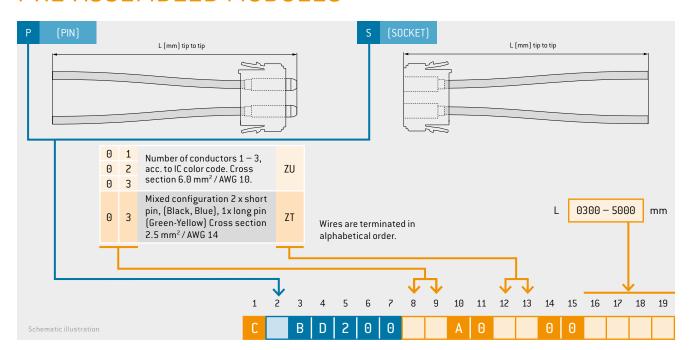

# PRE-ASSEMBLED CONTACTS

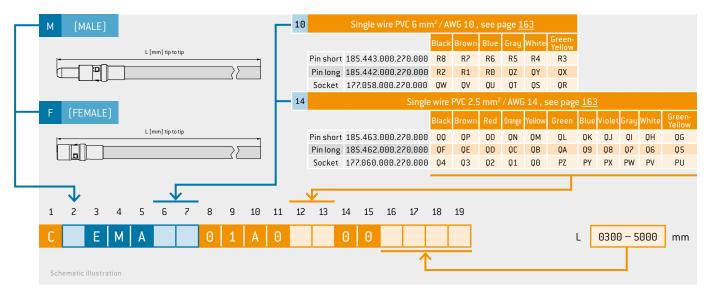

# **MODULE 1 CONTACT**

Flexible protective grounding for all conductive housings and docking frame versions



Contact diameter: 8 mm Mating cycles<sup>1</sup>: min. 10,000

Conductor cross-section: 10/16/25/35 mm<sup>2</sup>

### **TECHNICAL NOTES**


- The module can be freely positioned in any frame and allows contacting to the frame and conductive housing.
- Novel torx cone connection for optimized power transmission
- For crimp information, see from page 168

Description	Part number	Conductor cross-section <sup>1</sup>	Nominal current <sup>2</sup> Single contact	Impulse current	Contact resistance
		mm²	А	kA	Ω
PE module/Pin	181.870.400.204.000	35	135	>20	< 0.1
PE module/Socket	178.870.400.204.000	33	133	>20	< 0.1
PE module/Pin	181.869.400.204.000	25	125	>20	< 0.1
PE module/Socket	178.869.400.204.000	23	125	>20	< 0.1
PE module/Pin	181.866.400.204.000	16	90	>20	< 0.1
PE module/Socket	178.866.400.204.000	10	90	>20	< 0.1
PE module/Pin	181.872.400.204.000	10	65	>20	< 0.1
PE module/Socket	178.872.400.204.000	10	00	>20	< 0.1
Assembly tool	598.054.002.000.000				
Bit torx TX 10 assembly tool	598.054.104.000.000				

 $<sup>^{\</sup>rm 1}{\rm Fine}$  wire acc. to IEC 60228:2004 (VDE 0295:2005-09; class5).

<sup>&</sup>lt;sup>2</sup> Determined acc. to IEC 60512-5-1:2002 at a temperature increase of 45 K.


# CABLE ASSEMBLY - MODULE 1 CONTACT

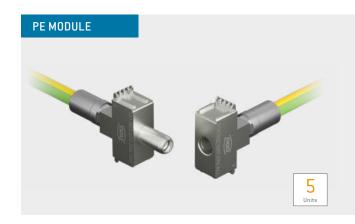

Technical data wires, see page <u>163</u>		
Conductor	TPC — tin plated copper acc. to DIN EN 13602:2013-09	
Insulation	UL-PVC +105 °C (UL-Style 1015)	
Temperature range in motion $-10 \mathrm{up}$ to $+105^{\circ}\mathrm{C}$		
Temperature range at rest −30 up to +105 °C		
Test voltage 2,000 V/AC (UL-Style 1015)		
Operating voltage 600 V (UL-Style 1015)		
The combined technical specification of the cable barness is determined but be inferior individual.		

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.

# PRE-ASSEMBLED MODULES

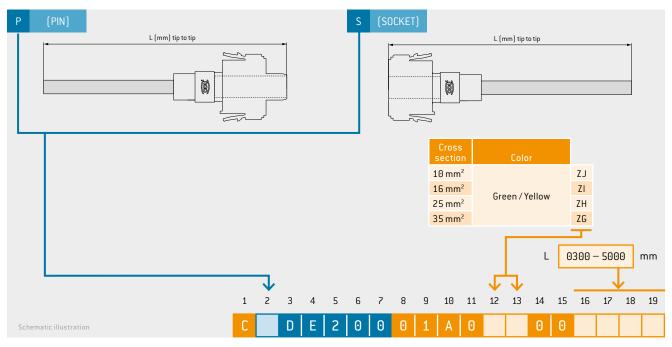

# MODULE 2 CONTACTS 1



Contact diameter: 1.3 mm Mating cycles: min. 10,000 Operating voltage: 4,000 V

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts. For use in connector systems, the load should be reduced according to VDE 0298-4:2023-06 (see page 188).
- For crimp information, see from page 168

MATERIALS			
Insulator	Thermoplastic acc. to UL 94		
Contact/insulator	Cu alloy		
Contact finishing	Gold-plated		

MATERIALS		Module 2 contacts	Part number Part number	
	Thermoplastic	Insulator socket	630.160.102.923.000	
sulator	acc. to UL 94	Insulator pin	631.160.102.923.000	
ontact/insulator	Cu alloy			

Description	Part number	m <sup>2</sup>		m <sup>2</sup> m		Nomin	al current <sup>6</sup>	Max. continuous	Qu
		Conductor cross- section <sup>5</sup> mm <sup>2</sup>	Termination AWG	Single contact A	Module fully equipped A	current <sup>1</sup> Single contact A	Contact resistance mΩ		
Pin contact short	185.432.000.270.000	00							
Pin contact long	185.424.000.270.000	0.5 - 1.00	18 – 20	12.5	11.5	19.5	1.8		
Socket contact	175.535.000.270.000	.0							
Pin contact short	185.714.000.270.000	0.38	(0						
Pin contact long	185.713.000.270.000	1	22 – 26	9.5	7	12	1.8		
Socket contact	175.A42.000.270.000	0.14	10						
Removal tool	087.7CC.130.004.000								

### TECHNICAL DATA

### Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)<sup>2</sup>

Operating voltage	4,000 V	1,600 V
Pollution degree	2	3
Rated surge voltage	12,0	00 V
Clearance distance	15.5	mm
Creepage distance	20.6	mm

### Voltage data according to MIL<sup>4</sup>


Operating voltage	3,300 V
Test voltage	9,900 V

#### Voltage data according to IEC 61010-1:2010 (VDE 0411-1:2020-03)3

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	4,000 V	1,600 V
Pollution degree	2	3
Test voltage	7,198 V AC	

<sup>&</sup>lt;sup>1</sup> For a definition of max. continuous current, see page 188 <sup>2</sup> IEC 60664-1:2020 (VDE 0110-1:2022-07) see page 179 <sup>3</sup> See page 182 <sup>4</sup> See page 185 <sup>5</sup> Fine wire acc. to IEC 60228:2004 (VDE 0295:2005-09; class 5) 6 Determined according to IEC 60512-5-2:2002 at increased temperature 45 K


# CABLE ASSEMBLY — MODULE 2 CONTACTS

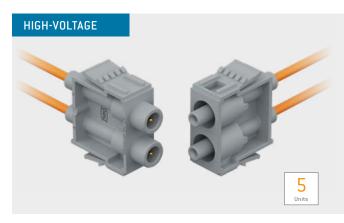


Technical data wires 1.00 mm² / AWG 18, see page <u>165</u>		
Conductor	SPC – silver plated copper	
Insulation	Fp-FEP	
Temperature range	−40 up to +200 °C	
Test voltage	13,100 V/AC	
Operating voltage	5,800 V	

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.


# PRE-ASSEMBLED MODULES

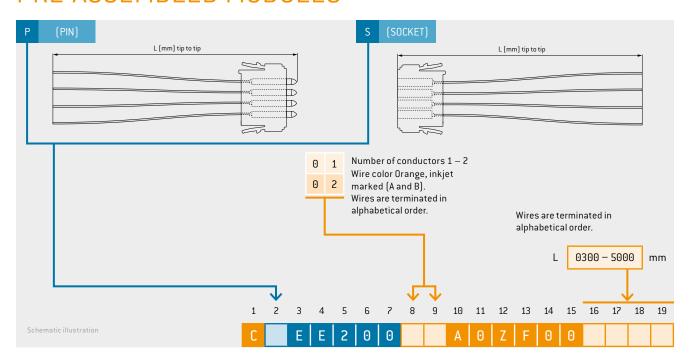

# PRE-ASSEMBLED CONTACTS

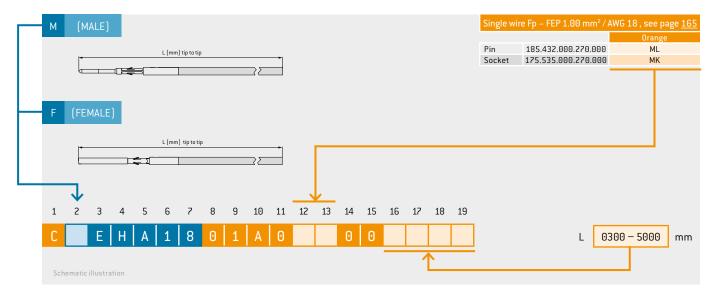

# MODULE 6 CONTACTS

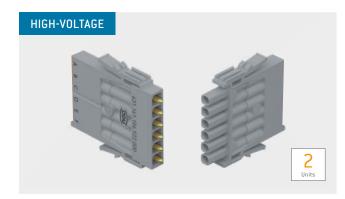

Contact diameter: 1.3 mm Mating cycles: min. 10,000 Operating voltage: 1,500 V

#### **TECHNICAL NOTES**

- The current load information is valid for single contacts. For use in connector systems, the load should be reduced according to VDE 0298-4:2023-06 (see page 188).
- For crimp information, see from page 168

MATERIALS			
Insulator	Thermoplastic acc. to UL 94		
Contact/insulator	Cu alloy		
Contact finishing	Gold-plated		

MATERIALS		
Insulator	Thermoplastic acc. to UL 94	
Contact/insulator	Cu alloy	
Contact finishing	Gold-plated	

TECHNICAL DATA

# Voltage data according to IEC 60664-1:2020 (VDE 0110-1:2022-07)<sup>2</sup>

Operating voltage	1,500 V	600 V
Pollution degree	2	3
Rated surge voltage	6,00	90 V
Clearance distance	7.8 :	mm
Creepage distance	7.8	mm

### Voltage data according to MIL<sup>4</sup>

Operating voltage	2,000 V
Test voltage	6,000 V

#### Voltage data according to standard IEC 61010-1:2010 (VDE 0411-1:2020-03)3

Supply voltage from grid supply circuit (CAT.2)	150 V < U <sub>rms</sub>	≤ 300 V
Operating voltage	1,500 V	600 V
Pollution degree	2	3
Test voltage	2,602\	'AC


Module 2 contacts	Part number
Insulator socket	630.161.106.922.000
Insulator pin <sup>3</sup>	631.161.106.922.000

Description	Part number	oss- m²	<u> </u>	Nomin	al current <sup>6</sup>	Max. continuous	G	
		Conductor cross- section <sup>s</sup> mm <sup>2</sup>	Termination AWG	Single contact A	Module fully equipped A	current <sup>1</sup> Single contact A	Contact	
Pin contact short	185.432.000.270.000	00						
Pin contact long	185.424.000.270.000	.5 – 1.00	18 – 20	12.5	11.5	19.5	1.8	
Socket contact	175.535.000.270.000	0	.0					
Pin contact short	185.714.000.270.000	0.38	10					
Pin contact long	185.713.000.270.000	1	22 – 26	9.5	7.0	12.0	1.8	
Socket contact	175.A42.000.270.000	0.14	10					
Removal tool	087.7CC.130.004.000							

Touch protection on the socket side: 2.8 mm distance to the test finger (according to UL 1977:2022 and DIN EN 61010-1:2020)

<sup>&</sup>lt;sup>1</sup> For a definition of max. continuous current, see page 188 <sup>2</sup> IEC 60664-1:2020 (VDE 0110-1:2022-07) see page 179 <sup>3</sup> See page 182 <sup>4</sup> See page 185 <sup>5</sup> Fine wire acc. to IEC 60228:2004 (VDE 0295:2005-09; class 5) 6 Determined according to IEC 60512-5-2:2002 at increased temperature 45 K


# CABLE ASSEMBLY - MODULE 6 CONTACTS

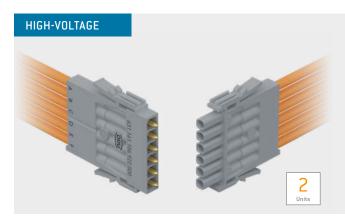


Technical data wires 1.00 mm² / AWG 18, see page <u>165</u>		
Conductor	TPC — tin plated copper	
Insulation	PVC	
Temperature range in motion	−10 up to +105 °C	
Temperature range at rest	−30 up to +105 °C	
Test voltage 5,000 V / AC		
Operating voltage	1,500 V	
The combined technical specification of the cable barness is determined by the inferior individual.		

The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.

# PRE-ASSEMBLED MODULES

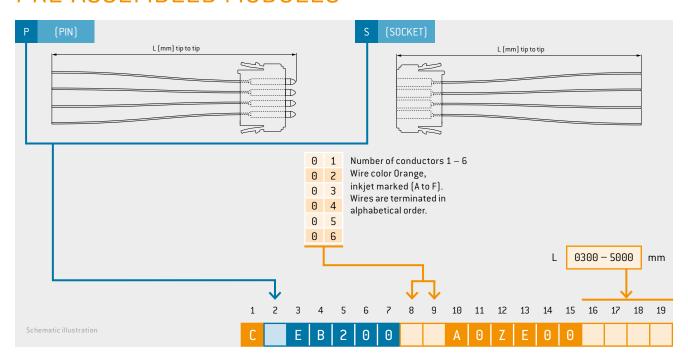

# PRE-ASSEMBLED CONTACTS

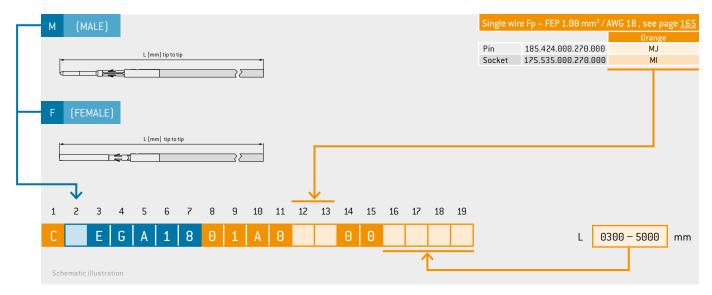

# COMBINATION MODULE FOR HIGH-SPEED DATA TECHNOLOGY AND COMPRESSED AIR

Size 1



Mating cycles<sup>1</sup>: min. 10,000 CAT 5, USB<sup>®</sup> 2.0, USB<sup>®</sup> 3.2 Gen 1x1, FireWire<sup>®</sup>, Ethernet, SPE 12 bar or 0 – 4 GHz

#### **TECHNICAL NOTES**

• Note for high-speed module, see pages 122 – 130


#### COMBINATION MODULE FOR HIGH-SPEED AND COMPRESSED AIR

- The function dictates that contacts are spring loaded in the mated state. The frame must maintain this spring load with a holding device
- Vacuum modules and further termination types on request
- No 0, model<sup>2</sup>
- Termination accessories, see page 121

#### COMBINATION MODULE CAN BE EASILY INTERCHANGEABLE

- Can be retrofitted with 50  $\Omega$  coax contact, see pages 108 109
- Can be retrofitted with 75  $\Omega$  coax contact, see pages 112 113
- Can be retrofitted with compressed air, see pages 114 115

### HOW TO CONFIGURE YOUR COMBINATION MODULE FOR HIGH-SPEED AND COAX / COMPRESSED AIR

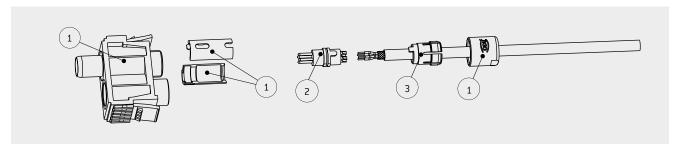


#### **ASSEMBLY SET**

Order	Base parts	Part number
1	Insulator incl. housing	See next page
2	Insert for shielded feedthrough cpl. solder contacts <sup>3</sup>	See pages <u>122 – 130</u>
3	Assembly set	See table on the right

Cable-∅	Part number
mm	
1.5 to 2.1	751.020.188.304.022
2 to 3.2	751.020.188.304.032
3 to 4.2	751.020.188.304.042
4 to 5.2	751.020.188.304.052
5 to 6.2	751.020.188.304.062
6 to 7.2	751.020.188.304.072
7 to 7.7	751.020.188.304.077

<sup>&</sup>lt;sup>1</sup>The stated mating cycles for compressed air module are possible via regular maintaince intervals <sup>2</sup> Not suitable for mixtures with over 25% oxygen content or explosive gases. <sup>3</sup> Insert for crimp contacts on request

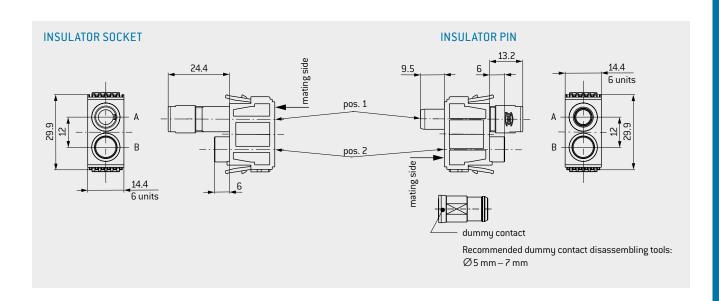

Description	Part number
Socket side	630.131.102.923.001
Pin side	631.131.102.923.001
Dummy contact	021.341.204.946.000

For useable 50  $\Omega$  coax contacts see page  $\underline{108}$  For useable 75  $\Omega$  coax contacts see page  $\underline{112}$  For useable compressed air contacts see page  $\underline{114}$ 


# CABLE ASSEMBLY — COMBINATION MODULE FOR HIGH-SPEED DATA TECHNOLOGY AND COMPRESSED AIR




#### For cable specification please see page 158/161


The combined technical specification of the cable harness is determined by the inferior individual technical values of the modules and raw cable.


# PRE-ASSEMBLED MODULES

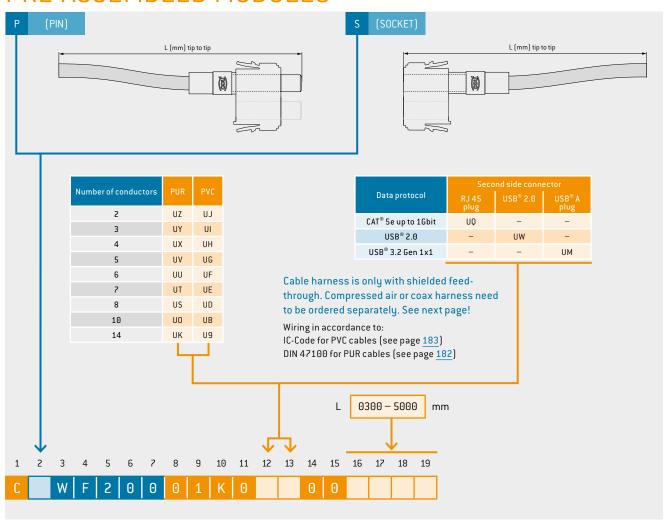


# PRE-ASSEMBLED CONTACTS

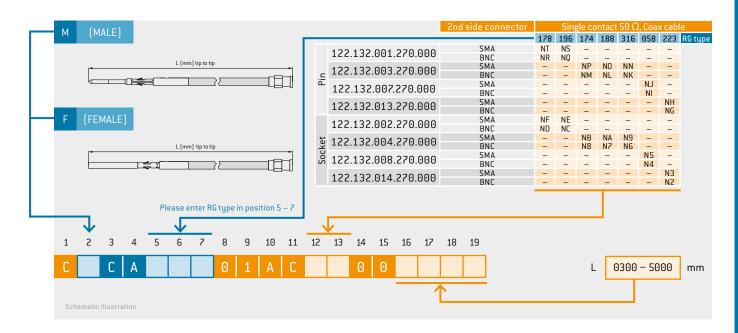

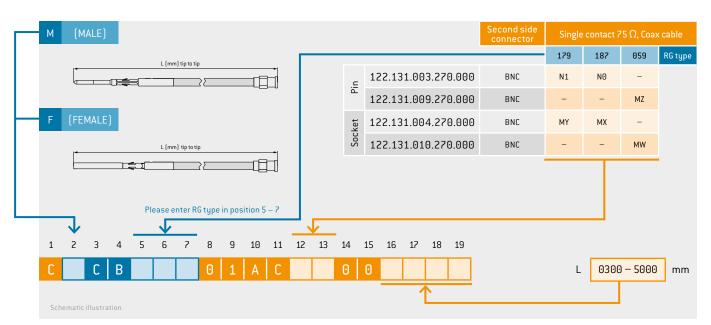

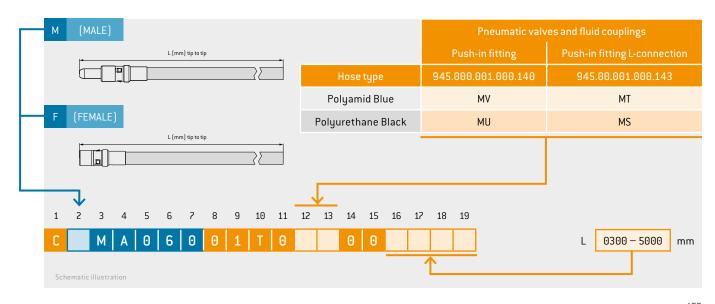

# MODULE 6 CONTACTS FOR 3 THERMOCOUPLES

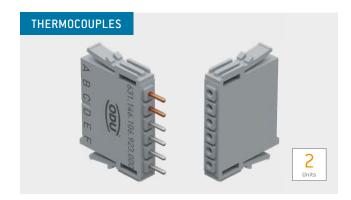

Contact diameter: 1.0 mm Mating cycles: min. 5,000

Thermocouple types: Type K and Type T

### **TECHNICAL NOTES**

- The current load information is valid for single contacts.

  For use in connector systems, the load should be reduced according to VDE 0298-4:2023-06 (see page 188).
- For crimp information, see from page 168

MATERIALS		
Insulator	Thermoplastic acc. to UL 94	
Contact type K	Ni-Cr (+) / Ni (-)	
Contact type T	Cu (+) / Cu-Ni (-)	

TECHNI	CAL DATA
Typical temp. range (Type K)	-200° C to 1,250° C
Typical temp. range (Type T)	-250° C to 350° C

Module 2 contacts	Part number
Insulator socket	630.146.106.923.000
Insulator pin	631.146.106.923.000

Description		Part number	cross- mm²	ation	Farbcode		
	Type		Conductor cross- section mm <sup>2</sup>	Termination AWG	Contact	ANSI <sup>1</sup>	IEC
Pin contact Ni-Cr (+)	oge:	186.050.000.905.000			Green	Yellow	Green
Pin contact Ni (-)	<b>K</b> Temperature range: -200°C to 1,250°C	186.051.000.905.000	- 0.5	20 – 24	White	Red	White
Socket contact Ni-Cr (+)		176.050.000.905.000	0.22		Green	Yellow	Green
Socket contact Ni (-)		176.051.000.905.000			White	Red	White
Pin contact Cu (+)	<b>T</b> Temperature range: -250 °C to 350 °C	186.052.000.905.000		20 – 24	Red	Blue	Brown
Pin contact Cu-Ni (-)		186.053.000.905.000	- 0.5		Yellow	Red	White
Socket contact Cu (+)		176.052.000.905.000	0.22		Red	Blue	Brown
Socket contact Cu-Ni (-)		176.053.000.905.000			Yellow	Red	White
Insert & removal tool		087.170.999.000.000					

# BLANK MODULES 🐧




Used to fill incomplete frames.

The frames must be fully equipped with insulators or blank modules.

### **TECHNICAL DATA**

Insulator

thermoplastic acc. to UL 94

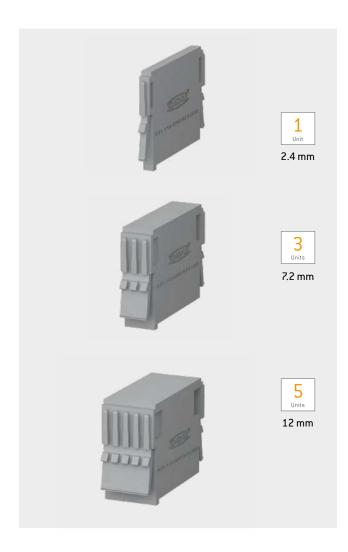


Units	Part number
1	631.151.000.923.000
3	631.153.000.923.000
5	631.155.000.923.000

# **CABLE SPECIFICATIONS**


# TECHNICAL DATA

# DATA CABLE USB® 2.0 — PRE-ASSEMBLED TYPE A




TECHNICAL DATA	USB <sup>®</sup> 2.0
Conductor	Stranded copper wire
Composition	1 x 2 x AWG 28 2 x AWG 24
Temperature range	−15 up to +80 °C
Test voltage	100 V
Jacket/Color	PVC Ø 4.5 mm / Black
Configuration	USB® 2.0 Type A Plug

# DATA CABLE USB® 3.2 GEN 1x1 — PRE-ASSEMBLED TYPE A




TECHNICAL DATA	USB <sup>®</sup> 3.2 GEN 1X1		
Conductor	Stranded copper wire		
Composition	2 x 2 x AWG 28 1 x 2 x AWG 28 2 x AWG 24		
Temperature range	−15 up to +80 °C		
Test voltage	300 V		
Jacket / Color	PVC Ø 5.5 mm / Black		
UL-Style	20276		
Configuration	USB® 3.2 Gen 1x1 Type A		

# DATA CABLE USB® 3.2 GEN 2x2 — PRE-ASSEMBLED TYPE C



TECHNICAL DATA	USB® 3.2 GEN 2X2		
Conductor	Stranded copper wire		
Composition	8 x AWG 30 / Coaxial 1 x 2 x AWG 30 2 x AWG 28 3 x AWG 30 3 x AWG 30 / Foil shield		
Temperature range	$-20\mathrm{up}\mathrm{to}+85^\circ\mathrm{C}$		
Temperature range in motion	±0 to +50 °C		
Test voltage	300 V		
Jacket / Color	TPE Ø 4.9 mm / Black		
UL-Style	758		
Configuration	USB® 3.2. Gen 2x2 Type C plug		

# DATA CABLE DISPLAYPORT® 2.0 - PRE-ASSEMBLED




TECHNICAL DATA	DISPLAYPORT® 2.0		
Conductor	Stranded copper wire		
Composition	5 x 2 x AWG30 4 x AWG30		
Temperature range	−20 up to +80 °C		
Test voltage	300 V		
Jacket / Color	PVC Ø 6.2 / 6.8 / 7.0 mm Black		
UL-Style	20276		
Configuration	DisplayPort® plug		

# **CABLE SPECIFICATIONS**


# TECHNICAL DATA

# DATA CABLE HDMI® 2.0 - PRE-ASSEMBLED




TECHNICAL DATA	HDMI® 2.0
Conductor	Stranded copper wire
Composition	5 x 2 x AWG30 4 x AWG30
Temperature range	−20 up to +80 °C
Test voltage	300 V
Jacket / Color	PVC Ø 7.3 mm / Black
UL-Style	20276
Configuration	HDMI® 2.0 Type A plug

# DATA CABLE HDMI® 2.1 - PRE-ASSEMBLED



TECHNICAL DATA	HDMI® 2.1		
Conductor	Stranded copper wire		
Composition	Length 1 m / 2 m: 5 x 2 x AWG30 4 x AWG30 Length 3 m: 5 x 2 x AWG30 4 x AWG28		
Temperature range	−20 up to +80 °C		
Test voltage	300 V		
Jacket / Color	PVC Ø 6.3 / 7.3 mm / Black		
UL-Style	20276		
Configuration	HDMI® 2.1 Type A plug		

# DATA CABLE ETHERNET — PRE-ASSEMBLED




TECHNICAL DATA	ETHERNET
Conductor	Bare copper wire, Ø 0.46 mm AWG 27 / 7
UL listed	E244889
Insulation	PE Ø 1.02 mm (core)
Jacket / Color	LSZH (jacket) / PVC (bend relief) / Black
Shielding	Tinned copper braid
Particle intrusion	IP2X
Water / submerge	IPX0
Ambient temperature	−40 °C to +75 °C
Halogen-free	IEC 60754-2
Flame retardant	IEC 60332-1; UL 444 CM
Transmission characteristics	Suitable for 10 Gigabit Ethernet Category 6A: ISO/IEC 11801; DIN EN 50173-1 Class EA: ISO/IEC 11801; DIN EN 50173-1 Category 6A: ANSI/TIA/EIA-568-C.2
Configuration	RJ45 plug

# **CABLE SPECIFICATIONS**

# TECHNICAL DATA

# DATA CABLES SINGLE PAIR ETHERNET — PRE-ASSEMBLED



TECHNICAL DATA	SINGLE PAIR ETHERNET		
Conductor	Tinned copper wire		
Composition	1 x 2 x AWG 22		
Insulation	PE Ø 1.65 mm		
Stranding	2 cores stranded to a pair		
Shielding	Tinned copper		
Jacket/Color	PVC / Black Ø 5.1 mm		
Temperature range	−20 up to +80 °C		
Configuration	DIN IEC 63171-2:2022-10 plug		

# **COAXIAL CABLES**




### TECHNICAL DATA

Conductor	See table
Insulation	See table
Jacket / Color	PVC / Black FEP-6Y / Transparent PFA-51Y / White
Shielding	Copper spiral shield
Temperature range in motion	See table (m)
Temperature range at rest	See table (r)

### WITHOUT UL APPROVAL

RG-	Z	Temperature range	nperature range Conductor Dimensions in mm		ns in mm	Insulation
Туре		(motion/rest)	Conductor	Outer-Ø	Core-Ø	Jacket
RG58	50 Ω	$-40^{\circ}\text{C}/+80^{\circ}\text{C}(r)$	tin-plated copper	$4.95 \pm 0.12$	2.95	PVC
RG59	75Ω	-20°C/+70°C(r)	steel-copper – conductor blank	6.15 ± 0.20	$3.70 \pm 0.10$	PVC
RG174	50 Ω	-10 °C / +70 °C (m)	steel-copper – conductor blank	$2.80 \pm 0.13$	$1.50 \pm 0.08$	PVC
RG178	50 Ω	-55 °C / +200 °C (m)	steel-copper – silver-plated conductor	$1.80 \pm 0.10$	$0.84 \pm 0.05$	FEP-6Y
RG179	75Ω	-55 °C / +200 °C (m)	steel-copper – silver-plated conductor	$2.54\pm0.10$	$1.60 \pm 0.05$	FEP-6Y
RG187	75Ω	-55 °C / +200 °C (m)	steel-copper – silver-plated conductor	$2.54 \pm 0.15$	$1.60\pm0.10$	PFA-51Y
RG188	50 Ω	-55 °C/+200 °C (m)	steel-copper – silver-plated conductor	$2.59 \pm 0.10$	1.52 ± 0.05	PFA-51Y
RG196	50 Ω	-55 °C / +200 °C (r)	steel-copper – silver-plated conductor	1.94	0.84	PTFE-5Y
RG223	50 Ω	-30 °C/+70 °C (m)	silver-plated copper acc. to EN13602	5.40 ± 0.20	$2.95 \pm 0.10$	PVC
RG316	50 Ω	-55 °C/+200 °C (m)	steel-copper – silver-plated conductor	2.50 ± 0.10	1.52 ± 0.05	FEP-6Y

# SINGLE WIRES PVC UL-Style 1061 / 10002 | UL-Style 1007 / 1569 | UL-Style 1015

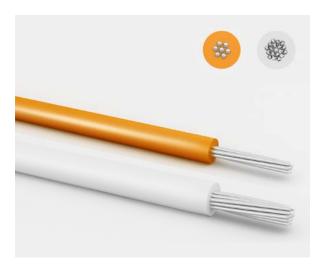

### TECHNICAL DATA

Conductor	TPC — tin plated copper acc. to DIN EN 13602:2013-09
Insulation	UL-PVC semi rigid (UL-Style 1061 / 10002 UL-PVC 105 °C (UL-Style 1007 / 1569 & 1015)
Temperature range in motion	-10 up to +105°C (UL-Style 10002/1569/1015) -10 up to +80°C (UL-Style 1007) -30 up to +80°C (UL-Style 1061)
Temperature range at rest	−30 up to +105°C (UL-Style 10002/1569/1015) −30 up to +80°C (UL-Style 1007 /1061)
Test voltage	1,500 V/AC (UL-Style 1061 / 10002) 3,000 V/AC (UL-Style 1007 / 1569) 6,000 V/AC (UL-Style 1015)
Operating voltage	300 V (UL-Style 1061 / 10002 & 1007 / 1569) 600 V (UL-Style 1015)

# **CABLE SPECIFICATIONS**

# TECHNICAL DATA

# MULTI-CONDUCTOR CABLES PVC SCREENED UL / CUL — LIYCY STYLE 2464 / 2517-10002



### TECHNICAL DATA

Conductor	TPC – tin plated copper acc. to DIN EN 13602:2013-09
Insulation	UL-PVC semi rigid
Jacket / Color	PVC / Black
Shielding	Copper braid tinned
Temperature range in motion	−10 up to +80 °C (style 2464) −10 up to +105 °C (style 2517)
Temperature range at rest	-30 up to +80 °C (style 2464) -30 up to +105 °C (style 2517)
Test voltage	1,500 V/AC
Operating voltage UL	300 V
Wire colors	acc. to IC-Code

# MULTI-CONDUCTOR CABLES PUR SHIELDED-UL / CUL — STYLE 20233 / 10042



### TECHNICAL DATA

Conductor	Bare copper acc. to DIN EN 13602:2013-09
Insulation	TPE (12Y) thermoplastic compound
Jacket/Color	PUR - (11Y), UL-AWM758 / Black
Temperature range in motion	−40 up to +80 °C
Temperature range at rest	−50 up to +80 °C
Test voltage	1,500 V/AC
Operating voltage UL	300 V
Wire colors	acc. to DIN 47100

# HIGH-VOLTAGE SINGLE WIRE



TECHNICAL DATA

Conductor	SPC – silver plated copper
Insulation	Fp-FEP
Jacket / Color	Orange Ø 2.45 mm
Temperature range	−40 up to +200 °C
Test voltage	13,100 V/AC
Operating voltage UL	5,800 V

CROSS SECTION 1.00 mm² / AWG 18

Composition: 19 x 0.120 mm

## HIGH-VOLTAGE SINGLE WIRE



### TECHNICAL DATA

Conductor	TPC — tin plated copper
Insulation	PVC
Color	Orange Ø 2.90 mm
Temperature range	−10 up to +105 °C
Test voltage	5,000 V / AC
Operating voltage UL	1,500 V

## CROSS SECTION 1.00 mm<sup>2</sup> / AWG 18

Composition: 19 x 0.254 mm





# TOOLS

Termination technology	168
Crimping tools	169
Tensile strength diagram for crimp terminations	<u>170</u>
Crimp information	<u>171</u>
Assembly aids	<u>172</u>
Removal tools	173
Removal of contacts	174
Service kit for ODU SPRINGTAC® and ODU LAMTAC® contacts	<u>175</u>

# TERMINATION TECHNOLOGY



ODU offers three different termination technologies for the single contacts:

- Crimp
- Solder
- PCB

#### **CRIMP TERMINATION**

The contact processing for the production of connecting cables via crimping creates a secure, durable, and corrosion-free contact. For most people, crimping is easy and quick to carry out.

Through crimping, the conductor and contact materials in the compressed areas become so dense as to create a connection which is nearly gas-proof, and with a tensile strength befitting the conductor material.

Crimping can be carried out on the tiniest of crosssections as well as on larger crosssections. For small crosssections (0.14–2.5  $\,$  mm²), 8-point crimping tools are used; hexagonal crimping tools are used for larger crosssections. The corner measurement of the crimping is never larger than the original diameter. The cable insulation is not damaged in the process and can be directly attached to the connector end.

For error-free crimping, the bore diameter must be perfectly fitted to the cable. Such error-free crimping is only guaranteed if using ODU-recommended crimping tools. In order to correctly advise you, we need to know your cable type and cable cross-section, preferably by means of a sample and corresponding data sheet.





FOR ASSEMBLY INSTRUCTIONS, PLEASE REFER TO OUR WEBSITE: WWW.ODU-CONNECTORS.COM

# **CRIMPING TOOLS**



For further crimp information, please refer to the table on page 171.

### 8-POINT CRIMPING TOOL FOR CONDUCTOR CONNECTIONS FROM 0.08 TO 1 mm<sup>2</sup>



With user-friendly digital display PART NUMBER: 080.000.051.000.000

POSITIONER FOR CONTACT DIAMETER FROM 0.7 TO 2 mm PART NUMBER: 080.000.051.101.000

Has to be ordered separately

### 8-POINT CRIMPING TOOL FOR CONDUCTOR CONNECTIONS FROM 1.5 TO 2.5 mm<sup>2</sup>



With user-friendly digital display PART NUMBER: 080.000.057.000.000

POSITIONER FOR CONTACT DIAMETER FROM 2 TO 3.5 mm PART NUMBER: 080.000.057.101.000 Has to be ordered separately

### HEXAGONAL CRIMPING TOOL FOR CROSSSECTIONS (AWG 12) FROM 4 TO 6 mm<sup>2</sup>



With blocking system
PART NUMBER: 080.000.062.000.000

### MECHANICAL HEXAGONAL HAND CRIMPING TOOL FROM 10 TO 50 mm<sup>2</sup>



### PART NUMBER: 080.000.064.000.000

High pressing force with low manual force through precision mechanics. Folding head facilitates processing of unwieldy connector forms and changing of crimp dies.

CRIMPING JAWS FOR CONTACT DIAMETER FROM 5 TO 8 mm SEE PAGE  $\underline{171}$ . Has to be ordered separately

### HEXAGONAL CRIMPING TOOL FOR COAX CONTACTS



With blocking system
PART NUMBER PLIER: 080.000.039.000.000

#### **CRIMPING JAWS SEE PAGE 171.**

Has to be ordered separately

### CRIMPING TOOL FOR THERMO CONTACTS



PART NUMBER: 080.000.071.000.000


# TENSILE STRENGTH FOR CRIMP TERMINATIONS



### IEC 60352-2:2006 (DIN EN 60352-2:2014-04)

Tensile strength diagram of a crimp termination depending on the conductor crosssection IEC 60352-2:2006 (DIN EN 60352-2:2014-04).

Example: A 2.5 mm<sup>2</sup> conductor must achieve a minimum tensile strength of approx. 320 N.

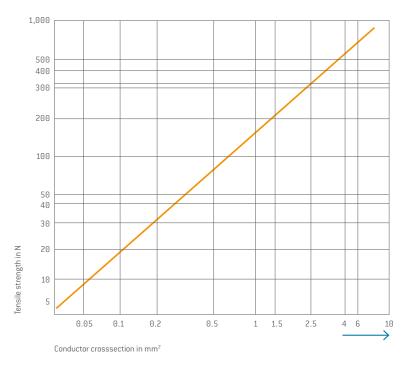

#### NOTE

Internal standards and guidelines are used for crosssections (> 10 mm<sup>2</sup>), as these are not clearly defined in the international standard.

### TESTING ELECTRICAL CONTINUITY FOLLOWING ASSEMBLY / TESTING OF WIRING:

One of the most important functional features is the observance of the specified mating and sliding forces. All socket contacts in fully automatic systems supplied by ODU are therefore tested for 100 % observance of these values in the context of process monitoring. This takes place with the correctly chosen testing systems without damage to the socket. However, ODU points out that incorrectly chosen testing systems (e.g., test

pin) or processing methods (e.g., test speed) following assembly can damage the sockets / pins. Please note the instructions in the assembly instructions on the ODU website:

### odu-connectors.com

We recommend using suitable test adapters here.





# **CRIMP INFORMATION**



Module	е		nation ection <sup>5</sup>	8-point crimping tool 080.000.051.000.000 without positioner	8-point crimping tool 080.000.057.000.000 without positioner	Hexagonal crimping tool 080.000.062.000.000	Hexagonal crimping tool 080.000.064.000.000
		AWG 7 wire	mm²	Positioner 080.000.051.101.000 Position / adjusting	Positioner 080.000.057.101.000 Position / adjusting		
		19 wire	Class 5	dimension	dimension		Crimping jaws
		30	-	9/0.45	-	-	-
		28	-	9/0.55	-	-	-
	0	26	-		-	-	-
10 or 20 contacts	7	24	-	9/0.62	-	-	_
(Signal)	_	22	-		-	-	_
(Signal)		_	0.05	9/0.45	-	_	-
		_	0.08	9/0.55	-	-	-
	3	-	0.14	9/0.62	-	-	-
		-	0.38	37 0.02	-	-	-
	1	26	-	10/0.62	-	-	-
6 contacts		24	-	10/0.62	-	-	-
(Signal)		22	-	10/0.62	-	-	-
		-	0.14	10/0.62	-	-	-
	- die	-	0.25	10/0.62	-	-	-
2 or 6 contacts		-	0.38	10/0.62	-	-	-
(High-voltage)	SE	20	-		-	-	-
(Iligii-voitage)	Allaha.	18	-	10/0.92	-	-	-
	1	-	0.50	107 0.52	-	-	-
		-	0.75		-	-	-
		-	1	10/1.02	-	-	-
		18	-	11/1.22	-	-	-
	No.	16	-	11/1.27	-	-	-
5 contacts	- E	14	-	-	3/1.67	-	-
(Signal)	18/18/18	-	1	11/1.22	-	-	-
		-	1.5	-	3/1.27	-	-
		-	2.5	-	3/1.67	-	-
		14	-	-	1 <sup>1</sup> , 2 <sup>2</sup> / 1.67		-
		12	-	-	-	Profile no. 3	-
3 contacts	100 8	10	-	-	-	Profile no. 3	-
(High-current)	4118	-	2.5	-	1 <sup>1</sup> , 2 <sup>2</sup> / 1.67	5 /// 0	-
		-	4	-	-	Profile no. 3	-
		-	6	-	-	Profile no. 3	-
2 contacts	360	-	10	-	-	-	080.000.064.110.000
(High-current)	A ST	_	16	_	-	-	080.000.064.101.000
2 contacts		-	16	-	-	-	080.000.064.116.000
(High-current)	nse	-	25	-	-	-	080.000.064.125.000
1 00/111	-	-	25	-	-	-	080.000.064.125.000
1 contact (High-current)	CHI.	-	35	-	-	-	080.000.064.135.000
(mgn-current)	6	-	50	-	-	-	080.000.064.150.000

#### COAX CRIMP INFORMATION

CUAX CRIMP INFURMATION		
	Positioner for inner conductor 080.000.051.102.000	Crimp dies for outer conductor
	Position / adjusting dimension	
RG 178 / RG 196	2 / 0.67 <sup>3</sup> 1 / 0.57 <sup>4</sup>	082.000.039.101.000
RG 174/RG 179/RG 187/ RG 188/RG 316	2 / 0.67 <sup>3</sup> 1 / 0.57 <sup>4</sup>	082.000.039.102.001
RG 58	2/0.923	082.000.039.106.000
RG 223	2/0.923	082.000.039.108.000
RG 59	2/0.673	082.000.039.109.000

### CRIMP INFORMATION FOR THERMOCONTACT

Crimp tool 080.000.071.000.000

<sup>&</sup>lt;sup>1</sup> Pin <sup>2</sup> Socket <sup>3</sup> For contacts 122.131 ... & 122.132 ... <sup>4</sup> For contacts 122.133 ... <sup>5</sup> The listed cross-section correspond to a finely stranded conductor design according to IEC 60228:2004 (VDE 0295:2005-09) class 5 or a finely stranded conductor design (7 / 19 stranded) according to AWG ASTM B258-14

# **ASSEMBLY AIDS**





### TORQUE WRENCH

With cross handle, fixed, automatic release (for inner hexagonal bits with C6.3 or E6.3 shaft).
Bit has to be ordered separately.

Description	Usage for	Part number	Nm	Recommended tightening torque
Torque wrench		598.054.001.000.000	0.9	-
Torque wrench		598.054.002.000.000	1.2	-
Torque wrench		598.054.004.000.000	1.5	-
Torque wrench		598.054.006.000.000	2.2	-
Torque wrench		598.054.003.000.000	3	-
Bit slot 8 (1.2 / 50)	Coding socket (DIN frame)	598.054.110.000.000	-	$1.2~\text{Nm} \pm 0.2~\text{Nm}$
Bit combination profile size 2	Coding socket (DIN frame)	598.054.113.000.000	-	1.2 Nm ± 0.2 Nm
Special bit	Coding pin for frames in a housing	598.054.203.000.000	-	$1.2~\text{Nm}\pm0.2~\text{Nm}$
Bit combination slot size 1	Fastening screw on frames in a housing	598.054.102.000.000	-	$1.2~\text{Nm} \pm 0.2~\text{Nm}$
Bit slot 5.5 (0.8 / 50)	Fastening screw on pin frames, floating mounted	598.054.101.000.000	-	1.2 Nm ± 0.2 Nm
Phillips bit cross slot size 2	Oval-head screw of grounding pin on frame	598.054.115.000.000	-	$1.2~\text{Nm} \pm 0.2~\text{Nm}$
Phillips PH1 Bit	PUSH-LOCK assembly	598.054.114.000.000	-	$0.6 \text{ Nm} \pm 0.2 \text{ Nm}$
Torx bit TX 10	Screws of the securing bracket in the spindle locking and spare spindle knob	598.054.104.000.000	-	1.2 Nm ± 0.2 Nm
Torx bit TX 10	Screws for PE module	598.054.104.000.000	-	1.2 Nm ± 0.2 Nm
Torx bit TX 10	Screw for power contact 8 mm contact- $\varnothing$	598.054.104.000.000	-	$1.5~\text{Nm} \pm 0.5~\text{Nm}$
Torx bit TX 20	Screw for power contact 12 mm contact- $\varnothing$	598.054.105.000.000	-	$2.2~\text{Nm} \pm 0.2~\text{Nm}$
Assembly tool back nut size 1	Back nut for shielded feedthrough size 1	598.055.001.000.000	-	0.9 Nm ± 0.2 Nm
Assembly tool back nut size 2	Back nut for shielded feedthrough size 2	598.055.003.000.000	-	2.0 Nm ± 0.4 Nm
Bit for coded spindle, slot $3 \times 0.5$ mm	Assembly of the spindle coding	598.054.109.000.000	-	0.9 Nm ± 0.2 Nm
Assembly tool back nut coax 50 $\Omega$	Back nut for coax 50 $\Omega$ (4 pole module)	598.055.005.000.000	-	-
Assembly tool back nut coax 75 $\Omega$	Back nut for coax 75 $\Omega$	598.055.006.000.000	-	-
Insertion tool (0.7 / 1.3 mm)	Insertion tool for mounting the 0.7mm and 1.3mm contacts	085.7CC.000.000.000	-	-

# **REMOVAL TOOLS**







Contact-Ø	Part number
mm	
0.7	087.7CC.070.005.000
1.3	087.7CC.130.004.000
2.0	087.7CC.200.003.000
3.5	087.7CC.350.001.000
5.0	087.7CC.680.001.000



Contact	Part number
Coax 4 contacts	087.7CC.310.001.000
Coax 2 contacts	087.7CC.690.001.000
Compressed air	087.7CC.680.001.000

Description	Usage for	Part number	
Insertion tool (0.7 / 1.3 mm)	Insertion tool for mounting the 0.7 mm and 1.3 mm contacts	085.7CC.000.000.000	
Insert and removal tool (1.0 mm)	Insert and removal tool for thermocontacts	087.170.999.000.000	

REMOVAL AND ASSEMBLY OF CONTACTS IS ONLY POSSIBLE WITH ODU TOOLS!

### REMOVAL TOOL FOR CONTACTS DIAMETER 0.7 mm

The contact is removed from the front, in the case of already assembled contacts, the cable does not have to be disconnected.

#### PART NUMBER: 087.7CC.070.005.000

### REMOVAL TOOL FOR CONTACTS DIAMETER 1.3 TO 5 mm

The contact is removed from the front, in the case of already assembled contacts, the cable does **not** have to be disconnected.

### REMOVAL TOOL FOR COAX AND **COMPRESSED-AIR CONTACTS**

The contact is removed from the front, in the case of already assembled contacts, the cable does **not** have to be disconnected.

INSERTION / REMOVAL TOOLS FOR ODU-MAC® BLUE-LINE CONTACTS

# REMOVAL OF CONTACTS





### REMOVAL OF THE ASSEMBLED CONTACT

Use the conductor to push the contact to be removed to the front from behind, in order to make unlocking easier. The removal tool is pushed from the front over the contact and into the insulator until there is an audible click. By lightly pulling on the cable, the contact can be pulled from the rear of the insulator. The ODU-MAC® Blue-Line has the advantage that the contacts can also be clipped out of the module in an assembled condition without separation of the assembly.

REMOVAL OF CONTACTS IS ONLY POSSIBLE WITH ODU TOOLS

# SERVICE KIT FOR ODU CONTACTS





Contact lubrication improves the mechanical properties of contact systems. Cleaning the contact surfaces prior to lubrication is also recommended in order to remove pollution. With appropriate care, wear due to high mating frequency can be significantly minimized and the mating and demating forces reduced. The cleaning and lubricating interval must be individually adapted to circumstances and should only be carried out with products recommended by the contact manufacturer.

ODU has put together a service kit for this purpose, so that lubrication can be carried out directly on site. A cleaning brush and a special cleaning cloth, as well as precise instructions, help to ensure optimal care of the contacts. In the absence of other specifications, the service kit can be used for all ODU Contacts and connections.

PART NUMBER: 170.000.000.000.100

To reorder individual tubes of the lubricant:

**ORDER NUMBER: 50270079** 

For technical properties of the service kit, please refer to our website: <a href="mailto:odu-connectors.com">odu-connectors.com</a>

### **CLEANING INFORMATION**

Service manual 003.170.000.000.000


### **FURTHER INFORMATION**

Never submerge the connector in liquid. The connector may only be put back into operation again when it has been assured that it is completely dry.

Ensure that contact pins are not bent or otherwise damaged. The connector must no longer be used if damage or other signs of wear are detected. Clean with maximum 2.5 bar compressed air to avoid contact damage. A slight blackening of the contact points may occur over the course of the service life and represents no impairment of the electrical properties.

### Recommended cleaning agent

Soap: liquid soaps on sodium bicarbonate or potassium base Alcohol: ethanol 70 %, isopropyl alcohol 70 %

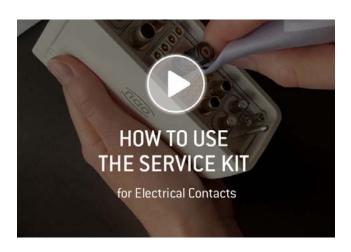

Additional information on https://vimeo.com/560732341







# **TECHNICAL INFORMATION**

International Protection classes (IP) according to	
IEC 60529:1989 (VDE 0470-1:2014-09)	<u>178</u>
Explanations and details of safety requirements, inspections and voltage data	<u>179</u>
IEC 61010-1:2010 (VDE 0411-1:2020-03)	<u>182</u>
Color code acc. to DIN 47100	183
International Color Code / IC-Code	184
Voltage data according to "MIL"	185
Conversions / AWG	186
Basic principles of current-carrying capacity	<u>187</u>
Current load	188
Current-carrying capacity diagram	189
Nominal current load of lines	191
Technical terms	<u>192</u>

# INTERNATIONAL PROTECTION CLASSES

i

According to IEC 60529:1989 (VDE 0470-1:2014-09)

Code letters First code number (International Protection) (degrees of protection against access to he ardous parts or against solid foreign object							
	IP 6			5			
Code number	Protection against access to hazardous parts / protection against ingress of solid foreign objects			Code number	Protection against harmful effects due to the ingress of water		
0	No protection		No protection against contact / no protection against solid foreign objects	0	No protection against water		No protection against water
1	Protection against large foreign objects		Protection against contact with the back of the hand / protection against solid foreign objects <b>diameter</b> ≥ 50 mm	1	Protection against dripping water		Protection against vertically falling water drops
2	Protection against medium-sized foreign objects		Protection against contact with the fingers / protection against solid foreign objects <b>diameter</b> ≥ 12.5 mm	2	Protection against water dripping at an angle		Protection against water drops falling at an angle (any angle up to 15° either side of the vertical)
3	Protection against small foreign objects		Protection against contact with tools / protection against solid foreign objects <b>diameter</b> ≥ 2.5 mm	3	Protection against spray water		Protection against spray water (any angle up to 60° either side of the vertical)
4	Protection against granular foreign objects		Protection against contact with a wire / protection against solid foreign objects <b>diameter</b> ≥ 1 mm	4	Protection against splashing water		Protection against splashing water from any direction
5	Dustproof		Protection against contact with a wire / protection against uncontrolled ingress of dust	5	Protection against water jet		Protection against water jet from any direction
6	Dustproof		Protection against contact with a wire / complete protection against ingress of dust	6	Protection against power- ful water jet		Protection against powerful water jet from any direction
-	-	-	-	7	Protection against the effects of temporary immersion in water		Protection against ingress of harmful quantities of water by temporary submersion into water
-	-	-	-	8	Protection against the effects of continuous immersion in water		Protection against ingress of harmful quantities of water by continuous submersion into water
-	-	-	-	9	Protection against high-pressure water jet featuring high temperatures		Protection against water from all directions character- ized by high pressure and high temperatures

# **EXPLANATIONS AND DETAILS OF** SAFETY REQUIREMENTS, INSPECTIONS, AND **VOLTAGE DATA GENERAL** IEC 60664-1:2020 (VDE 0110-1:2022-07) All the technical information listed in this catalog and the data WITHIN LOW-VOLTAGE SYSTEMS"



sheets has been determined by drawing on various standards. Unless otherwise stated, standard IEC 61984:2008 (VDE 0627: 2009-11) "Connectors – Safety requirements and tests" has been used to dimension and determine the values provided.

This international standard applies to connectors (with rated voltages of 50 V to 1,000 V alternating and direct, and rated currents of up to 125 A per contact) which either have no type specification or which have a type specification whose safety requirements refer to this standard. The standard can be used as a guide for connectors with rated voltages up to 50 V. In cases such as this, IEC 60664-1:2020 (VDE 0110-1:2022-07) must be consulted when dimensioning the clearance and creepage distances. This standard can also serve as a guide for connectors with rated currents higher than 125 A per contact.

All shown connectors and cable assemblies are defined without breaking capacity (COC) according to IEC 61984:2008 (VDE 0627:2009-11).

All of the voltage data listed in this catalog refers to the use of insulators, which have been installed according to assembly regulations for the ODU-MAC® Portfolio. Customer-specific attachments, which could reduce the clearance and creepage distances, have not been taken into account here.

The clearance and creepage distances are determined on the bases specified in IEC 60664-1:2020 (VDE 0110-1:2022-07).

The most important influence variables and the electrical parameters harmonized with these will be explained in more detail in the following. We would be happy to assist you with any further questions. The texts and tables given here are excerpts from the indicated standards. As a rule, product committees lay down application-specific safety requirements for various fields of use; these requirements also regulate the insulation coordination and inspection of connectors. In such cases, the "product standards" take precedence and must be observed instead of the "basic safety standards" stated here. However, since this catalog and the technical data sheets cannot take all product standards into consideration, we have restricted ourselves to the following standard in terms of voltage data:

# "INSULATION COORDINATION FOR EQUIPMENT

This is what is known as a basic safety standard, which regulates the minimum requirements for dimensioning clearance and creepage distances, as well as their inspection. The standard applies to equipment used up to an altitude of 2,000 m above sea level and with a rated alternating voltage of up to 1,000 V and a nominal frequency of up to 30 KHz or a rated direct voltage of up to 1,500 V. It applies in those cases where corresponding product standards do not define any values for clearance and creepage distances, nor lay down any requirements for solid insulation, or where no product standards are even available.

The permissible overvoltages and the rated voltages may be significantly influenced by the use of blank modules and varying positioning of the contacts in the insulators.

### The following general specifications have been defined for dimensioning:

- Insulation between electrical circuits (functional insulation between the contacts) or between an electrical circuit and local ground (contact with grounded frame) has been dimensioned as basic insulation. If "double insulation" or "reinforced insulation" is required, the voltage data provided may no longer apply; insulating clearances may need to be extended.
- Unless otherwise stated, all voltages are given as rms voltage values.
- Overvoltage category III is used, along with the TT and TN system types, to dimension the rated surge voltage.
- Condition A is always used for the inhomogeneous field when dimensioning the clearance distances.
- The prescribed tests for solid insulation and for the airways (if necessary) shall be carried out in accordance to the tables shown in annex F.
- The clearance and creepage distances are determined on the bases specified in this standard.
- Unless otherwise noted, all values for test voltages are values for type tests.

#### OPERATING VOLTAGE / RATED VOLTAGE / NOMINAL VOLTAGE

The max. operating voltage (= rated voltage) is the value of a voltage that is specified by the manufacturer for a component, device, or item of equipment according to various applicable standards, and to which the operating and performance



features relate. Some standards use the term "rated voltage" or "working voltage" instead of "operating voltage". In these explanations, the term "nominal voltage" is used for the value of the issued voltage indicated by the power supply company (PSC) or by the manufacturer of the voltage source for classification of the overvoltage category.

Equipment may have more than one value or one range for rated voltage.

(see Table F.5 in IEC 60664-1:2020 (VDE 0110-1:2022-07))

#### RATED SURGE VOLTAGE

Value of an impulse withstand voltage that is indicated by the manufacturer for equipment or a part thereof, and which indicates the defined endurance of its insulation against transient (brief, duration of a few milliseconds) overvoltages. The impulse withstand voltage is the highest value of the surge voltage of a defined form and polarity which will not result in the dielectric breakdown of the insulation under defined conditions.

Depending upon the indicated pollution degree, the rated surge voltage depends upon the clearance distance between the individual contacts (see Table F.2 in IEC 60664-1:2020 (VDE 0110-1:2022-07)).

According to this standard, the minimum clearance distances for equipment not connected directly to the low voltage mains should be measured according to the possible permanent voltages, the temporary overvoltages, or periodic peak voltages [see Table F.8 in IEC 60664-1:2020 [VDE 0110-1:2022-07]].

If a "periodic peak voltage" is present for a long time over the service life (more than approximately 60 minutes), this is not an overvoltage as regards insulation dimensioning under the terms of the standard, but must be considered a continuous voltage instead. In such cases, the "periodic peak voltage" must be used as the operating voltage.

### **POLLUTION DEGREE**

Potentially occurring pollution combined with moisture can influence the insulation capacity on the surface of the connector. In order to define various rating parameters, a pollution degree according to the criteria listed below must be selected for the equipment.

In the case of a connector with a degree of protection of minimum IP54 IEC 60529:1989 (VDE 0470-1:2014-09), the insulating parts may be measured enclosed according to the standard for a low pollution degree. This also applies for mated connectors for which enclosure is ensured by the connector housing and which are only disconnected for testing and maintenance purposes.

### Pollution degree 1

No or only dry, non-conductive pollution is present. The pollution has no influence. For example, computer systems and measuring instruments in clean, dry or air-conditioned rooms.

#### Pollution degree 2

Only non-conductive pollution is present. However, temporary conductivity due to condensation must be anticipated. For example, devices in laboratories, residential, sales, and other business areas.

#### Pollution degree 3

[= Standard, if no specific pollution degree is indicated] Conductive pollution occurs or dry, non-conductive pollution that becomes conductive because of condensation must be expected. For example, devices in industrial, commercial, and agricultural operations, unheated storage areas and workshops.

### Pollution degree 4

Permanent conductivity is present, caused by conductive dust, rain or moisture. For example, devices in the open air or outdoor facilities and construction machinery.

Depending upon the indicated pollution degree, the rated voltage is dependent upon the insulating material group of the connector and the respective creepage distances between the individual contacts.



#### **CLEARANCE DISTANCE**

The shortest distance in the air between two conductive parts.

#### CREEPAGE DISTANCE

The shortest distance between two conductive parts over the surface of an insulation material. The creepage distance is influenced by the pollution degree applied.

#### **TEST VOLTAGES**

The dielectric strength of the connector is confirmed according to the standard corresponding to the indicated rated surge voltage by applying the test voltage according to Table F.5 over a defined time range.

IEC 60664-1:2020 (VDE 0110-1:2022-07): Table F.6 – test voltages for testing clearance distances at different altitudes (the voltage levels are valid only to verify the clearance distances)

Rated surge voltage	Test surge voltage at sea level	Test surge voltage at 200 m elevation	Test surge voltage at 500 m elevation				
û kV	û kV	û kV	û kV				
0.33	0.357	0.355	0.350				
0.5	0.541	0.537	0.531				
0.8	0.934	0.920	0.899				
1.5	1.751	1.725	1.685				
2.5	2.920	2.874	2.808				
4	4.923	4.874	4.675				
6	7.385	7.236	7.013				
8	9.847	9.648	9.350				
12	14.770	14.471	14.025				
15	18.464	18.091	17.533				

### COLOR CODE ACC. TO DIN 47100



#### **CORED WITHOUT COLOR REPETITION**

Core	Core Color	Code	Core	
1	White	ws	32	
2	Brown	br	33	
3	Green	gn	34	
4	Yellow	ge	35	
5	Gray	gr	36	
6	Pink	rs	37	
7	Blue	bl	38	
8	Red	rt	39	
9	Black	sw	40	
10	Violet	vio	41	
11	Gray-Pink	grrs	42	
12	Red-Blue	rtbl	43	
13	White-Green	wsgn	44	
14	Brown-Green	brgn	45	
15	White-Yellow	wsge	46	
16	Yellow-Brown	gebr	47	
17	White-Gray	wsgr	48	
18	Gray-Brown	grbr	49	
19	White-Pink	wsrs	50	
20	Pink-Brown	rsbr	51	
21	White-Blue	wsbl	52	
22	Brown-Blue	brbl	53	
23	White-Red	wsrt	54	
24	Brown-Red	brrt	55	
25	White-Black	wssw	56	
26	Brown-Black	brsw	57	
27	Gray-Green	grgn	58	
28	Yellow-Gray	gegr	59	
29	Pink-Green	rsgn	60	
30	Yellow-Pink	gers	61	
31	Green-Blue	gnbl		

Core	Core Color	Code
32	Yellow-Blue	gebl
33	Green-Red	gnrt
34	Yellow-Red	gert
35	Green-Black	gnsw
36	Yellow-Black	gesw
37	Gray-Blue	grbl
38	Pink-Blue	gsbl
39	Gray-Red	grrt
40	Pink-Red	rsrt
41	Gray-Black	grsw
42	Pink-Black	rssw
43	Blue-Black	blsw
44	Red-Black	rtsw
45	White-Brown-Black	wsbrsw
46	Yellow-Green-Black	gegnsw
47	Gray-Pink-Black	grrssw
48	Blue-Red-Black	blrtsw
49	White-Green-Black	wsgnsw
50	Green-Brown-Black	gnbrsw
51	White-Yellow-Black	wsgesw
52	Yellow-Brown-Black	gebrsw
53	White-Gray-Black	wsgrsw
54	Gray-Brown-Black	grbrsw
55	White-Pink-Black	wsrssw
56	Pink-Brown-Black	rsbrsw
57	White-Blue-Black	wsblsw
58	Brown-Blue-Black	brblsw
59	White-Red-Black	wsrtsw
60	Brown-Red-Black	brrtsw
61	Black-White	swws

- The cores are counted starting in the outer layer and continuing through all layers in the same direction.
- The first color is the base color
- The 2<sup>nd</sup> and 3<sup>rd</sup> color is applied in the form of abrasion-resistant color rings.
- For 2 and 3-colored cores, the characters of the color code are lined up directly next to each other
- ullet For cables with color repetition, the color code starts again with White (1) from the  $45^{th}$  core onwards.
- For paired cores, always the two colors named in sequence are stranded.
- The color code is repeated from the 23<sup>rd</sup> and 45<sup>th</sup> pair onwards.

# INTERNATIONAL COLOR CODE / IC - CODE



#### FOR UL / CSA CONTROL CABLES

Core	Core Color	Core
1	Black	31
2	Brown	32
3	Red	33
4	Orange	34
5	Yellow	35
6	Green	36
7	Blue	37
8	Violet	38
9	Gray	39
10	White	40
11	White-Black	41
12	White-Brown	42
13	White-Red	43
14	White-Orange	44
15	White-Yellow	45
16	White-Green	46
17	White-Blue	47
18	White-Violet	48
19	White-Gray	49
20	Brown-Black	50
21	Brown-Red	51
22	Brown-Orange	52
23	Brown-Yellow	53
24	Brown-Green	54
25	Brown-Blue	55
26	Brown-Violet	56
27	Brown-Gray	57
28	Brown-White	58
29	Green-Black	59
30	Green-Brown	60

31	Core	Core Color
33 Green-Blue 34 Green-Violet 35 Green-Gray 36 Green-White 37 Yellow-Black 38 Yellow-Brown 39 Yellow-Red 40 Yellow-Orange 41 Yellow-Blue 42 Yellow-Gray 44 Yellow-Gray 45 Gray-Black 46 Gray-Brown 47 Gray-Red 48 Gray-Orange 49 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Fed 58 Orange-Green 59 Orange-Blue	31	Green-Red
34       Green-Violet         35       Green-Gray         36       Green-White         37       Yellow-Black         38       Yellow-Brown         39       Yellow-Orange         40       Yellow-Orange         41       Yellow-Blue         42       Yellow-Violet         43       Yellow-Gray         44       Yellow-White         45       Gray-Black         46       Gray-Brown         47       Gray-Red         48       Gray-Orange         49       Gray-Yellow         50       Gray-Green         51       Gray-Blue         52       Gray-White         53       Gray-White         54       Orange-Black         55       Orange-Red         57       Orange-Red         57       Orange-Green         59       Orange-Blue	32	Green-Orange
35       Green-Gray         36       Green-White         37       Yellow-Black         38       Yellow-Brown         39       Yellow-Red         40       Yellow-Orange         41       Yellow-Blue         42       Yellow-Violet         43       Yellow-Gray         44       Yellow-White         45       Gray-Black         46       Gray-Brown         47       Gray-Red         48       Gray-Orange         49       Gray-Fellow         50       Gray-Green         51       Gray-Blue         52       Gray-White         54       Orange-Black         55       Orange-Brown         56       Orange-Red         57       Orange-Red         57       Orange-Green         58       Orange-Green         59       Orange-Blue	33	Green-Blue
36 Green-White 37 Yellow-Black 38 Yellow-Brown 39 Yellow-Red 40 Yellow-Orange 41 Yellow-Uriolet 42 Yellow-White 43 Yellow-Gray 44 Yellow-White 45 Gray-Black 46 Gray-Brown 47 Gray-Red 48 Gray-Orange 49 Gray-Yellow 50 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Red 57 Orange-Green 59 Orange-Green	34	Green-Violet
37 Yellow-Black 38 Yellow-Brown 39 Yellow-Red 40 Yellow-Orange 41 Yellow-Blue 42 Yellow-Gray 44 Yellow-White 45 Gray-Black 46 Gray-Brown 47 Gray-Red 48 Gray-Orange 49 Gray-Yellow 50 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Red 57 Orange-Red 57 Orange-Green 59 Orange-Green	35	Green-Gray
Yellow-Brown Yellow-Red Yellow-Orange Yellow-Blue Yellow-Gray Yellow-Gray Yellow-White Yellow-White Gray-Black Gray-Brown Gray-Red Gray-Orange Gray-Green Gray-Blue Gray-White Gray-White  The Gray-White	36	Green-White
Yellow-Red Yellow-Orange Yellow-Blue Yellow-Violet Yellow-Gray Yellow-White Yellow-White Gray-Black Gray-Brown Gray-Red Gray-Gray Gray-Green Gray-Green Gray-Blue Gray-White Gray-Black Gray-White Gray-White Gray-White Gray-White Gray-Black Gray-White	37	Yellow-Black
40 Yellow-Orange 41 Yellow-Blue 42 Yellow-Violet 43 Yellow-White 44 Yellow-White 45 Gray-Black 46 Gray-Brown 47 Gray-Red 48 Gray-Orange 49 Gray-Green 51 Gray-Blue 52 Gray-White 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Blue	38	Yellow-Brown
41 Yellow-Blue 42 Yellow-Violet 43 Yellow-Gray 44 Yellow-White 45 Gray-Black 46 Gray-Brown 47 Gray-Red 48 Gray-Orange 49 Gray-Yellow 50 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	39	Yellow-Red
42 Yellow-Violet 43 Yellow-Gray 44 Yellow-White 45 Gray-Black 46 Gray-Brown 47 Gray-Red 48 Gray-Orange 49 Gray-Yellow 50 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Blue	40	Yellow-Orange
43  44  Yellow-Gray  44  Yellow-White  45  Gray-Black  46  Gray-Brown  47  Gray-Red  48  Gray-Orange  49  Gray-Green  51  Gray-Blue  52  Gray-White  53  Gray-White  54  Orange-Black  55  Orange-Brown  56  Orange-Red  57  Orange-Yellow  58  Orange-Green  59  Orange-Blue	41	Yellow-Blue
44 Yellow-White 45 Gray-Black 46 Gray-Brown 47 Gray-Red 48 Gray-Orange 49 Gray-Yellow 50 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Blue	42	Yellow-Violet
45 Gray-Black 46 Gray-Brown 47 Gray-Red 48 Gray-Orange 49 Gray-Green 50 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Green 59 Orange-Blue	43	Yellow-Gray
46 Gray-Brown 47 Gray-Red 48 Gray-Orange 49 Gray-Yellow 50 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Blue	44	Yellow-White
47 Gray-Red  48 Gray-Orange  49 Gray-Yellow  50 Gray-Green  51 Gray-Blue  52 Gray-Violet  53 Gray-White  54 Orange-Black  55 Orange-Brown  56 Orange-Red  57 Orange-Yellow  58 Orange-Green  59 Orange-Blue	45	Gray-Black
48 Gray-Orange 49 Gray-Yellow 50 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	46	Gray-Brown
49 Gray-Yellow 50 Gray-Green 51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	47	Gray-Red
Gray-Green Gray-Blue Gray-Violet Gray-White Gray-White Gray-Black Gray-Gray-Black Gray-Gray-Black Gray-Gray-Black Gray-Black Gray-Bl	48	Gray-Orange
51 Gray-Blue 52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	49	Gray-Yellow
52 Gray-Violet 53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	50	Gray-Green
53 Gray-White 54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	51	Gray-Blue
54 Orange-Black 55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	52	Gray-Violet
55 Orange-Brown 56 Orange-Red 57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	53	Gray-White
56 Orange-Red 57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	54	Orange-Black
57 Orange-Yellow 58 Orange-Green 59 Orange-Blue	55	Orange-Brown
58 Orange-Green 59 Orange-Blue	56	Orange-Red
59 Orange-Blue	57	Orange-Yellow
	58	Orange-Green
60 Orange-Violet	59	Orange-Blue
orange-violet	60	Orange-Violet

# IEC 61010-1:2010 (VDE 0411-1:2020-03)



"Safety requirements for electrical equipment for measurement, control, and laboratory use"

This is what is known as a type specification or product standard, which is universally applicable to all devices belonging to the application area covered by this standard. For particular types of device, these requirements are supplemented or modified by the specific requirements contained in one or more special additional parts of the standard (Part 2), which must be read in conjunction with the requirements contained in Part 1.

Devices belonging to the application area:

- Electrical test and measurement instruments: devices that test, measure, display or record electrical and/or physical variables (also applies to test instruments integrated in production processes)
- Electrical open and closed-loop control devices for industrial process control: devices that set one or more output variables to specific values
- Electrical laboratory equipment: devices that measure, display, monitor or analyze substances (may also be used outside of the laboratory)

Devices excluded from the application area:

- IEC 60065:2014 (Audio, video and similar electronic apparatus)
- IEC 60204:2016 (Electrical equipment of machines)
- IEC 60601:2005 (Medical electrical equipment)

#### This standard defines some special cases, unlike IEC 60664-1:2020 (VDE 0110-1:2022-07):

Limit values for accessible parts (Section 6.31):

The voltages listed below are classed as dangerous and active, if certain currents (0.5 mA AC; 2.0 mA DC) are exceeded at the same time:

- Alternating voltage (AC): U<sub>rms</sub> = 30 V (U<sub>peak</sub> = 42.4 V)
- Direct voltage (DC): U = 60 V
- Wet environment  $U_{rms} = 16 \text{ V AC } (U_{peak} = 22.6 \text{ V}); U = 35 \text{ V DC}$

A general distinction is made between the supply circuit (primary circuit) and the secondary circuit, which have different values for the clearance and creepage distances.

A partial discharge test is not compulsory at voltages > 700 V here either, it is merely recommended.

<sup>&</sup>lt;sup>1</sup>See corresponding section in the IEC 61010-1:2010 (VDE0411-1:2020-03) safety standard

### **VOLTAGE DATA ACCORDING TO "MIL"**



#### EIA-364-20F:2019

"Withstanding Voltage - Test Procedure for Electrical Connectors, Sockets and Coaxial Contacts"

The withstanding voltage values stated in this catalog were determined according to the method described in EIA-364-20F:2019 "Withstanding Voltage — Test Procedure for Electrical Connectors, Sockets and Coaxial Contacts". The inserts were tested while mated, and the test current was applied to the pin insert.

75 % of the calculated dielectric withstanding voltage is used as the test voltage for further calculations. The operating voltage is 1/3 of this value.

This standard refers to IEC 60512-4-1:2003 "Connectors for electronic equipment – Tests and measurements – Part 4-1: Voltage stress tests – Test 4a: Voltage proof".

Test voltage: dielectric withstanding voltage  $\times$  0.75 Operating voltage: dielectric withstanding voltage  $\times$  0.75  $\times$  0.33

If there are any deviations, the derating factors are to be factored in according to the applicable standards. All tests were conducted at the prescribed indoor climate and apply up to an altitude of 2,000 m.

# CONVERSIONS / AWG (AMERICAN WIRE GAUGE)



		Circul	ar wire		
AWG	Diam	neter	Cross- section	Weight	Max. resistance
	Inch	mm	mm²	kg/km	$\Omega$ / km
4/0[259/21]	0.6010	15.300	107.0	997.00	0.17
3/0[259/22]	0.5360	13.600	85.0	793.00	0.22
2/0[259/23]	0.4770	12.100	67.4	628.00	0.27
1/0[259/24]	0.4240	10.800	53.5	497.00	0.34
1 [259/25]	0.3780	9.600	42.2	395.00	0.43
2 [259/26]	0.3350	8.500	33.6	312.00	0.55
4 [133 / 25]	0.2660	6.800	21.1	195.00	0.87
6 [133 / 27]	0.2100	5.300	13.3	122.00	1.38
8 [133 / 29]	0.1670	4.200	8.37	76.80	2.18
10 [1]	0.1019	2.590	5.26	46.77	3.45
10 [37/26]	0.1150	2.921	4.74	42.10	4.13
12 [1]	0.0808	2.050	3.31	29.41	5.45
12 [19/25]	0.0930	2.362	3.08	27.36	5.94
12 [37 / 28]	0.0910	2.311	2.97	26.45	6.36
14 [1]	0.0641	1.630	2.08	18.51	8.79
14 [19/27]	0.0730	1.854	1.94	17.23	9.94
16 [1]	0.0508	1.290	1.31	11.625	13.94
16 [19/29]	0.0590	1.499	1.23	10.928	15.70
18 [1]	0.0403	1.020	0.823	7.316	22.18
20 [1]	0.0320	0.813	0.519	4.613	35.10
20 [7/28]	0.0390	0.991	0.563	5.003	34.10
20 [19/32]	0.0420	1.067	0.616	5.473	32.00
22 [1]	0.0253	0.643	0.324	2.883	57.70
22 [19/34]	0.0330	0.838	0.382	3.395	51.80
24 [1]	0.0201	0.511	0.205	1.820	91.20
24 [7/32]	0.0250	0.635	0.227	2.016	86.00
24 [19/36]	0.0270	0.686	0.241	2.145	83.30
26 [1]	0.0159	0.404	0.128	1.139	147.00
26 [7/34]	0.0200	0.508	0.141	1.251	140.00
26 [19/38]	0.0220	0.559	0.154	1.370	131.00
28 [1]	0.0126	0.320	0.0804	0.715	231.00
28 [7/36]	0.0160	0.406	0.0889	0.790	224.00
28 [19 / 40]	0.0170	0.432	0.0925	0.823	207.00
30 [1]	0.0100	0.254	0.0507	0.450	374.00
30 [7/38]	0.0130	0.330	0.0568	0.505	354.00
32 [1]	0.0080	0.203	0.0324	0.288	561.00
32 [7/40]	0.0110	0.279	0.0341	0.303	597.10
34 [1]	0.0063	0.160	0.0201	0.179	951.00
34 [7/42]	0.0070	0.180	0.0222	0.197	1,491.00
36 [1]	0.0050	0.127	0.0127	0.1126	1,519.00
36 [7/44]	0.0060	0.150	0.0142	0.1263	1,322.00

The American Wire Gauge (AWG) is based on the principle that the crosssection of the wire changes by 26 % from one gauge number to the next. The AWG numbers decrease as the wire diameter increases, while the AWG numbers increase as the wire diameter decreases. This only applies to solid wire.

However, stranded wire is predominately used in practice. This has the advantage of a longer service life under bending and vibration as well as greater flexibility in comparison with solid wire.

Stranded wires are made of multiple, smaler-gauge wires (higher AWG number). The stranded wire then receives the AWG numbers of a solid wire with the next closest crosssection to that of the stranded wire. In this case, the crosssection of the stranded wire refers to the sum of the copper crosssections of the individual wires.

Accordingly, strands with the same AWG number but different numbers of wires differ in cross-section. For instance, an AWG 20 strand of 7 AWG 28 wires has a crosssection of 0.563 mm², while an AWG 20 strand of 19 AWG 32 wires has a cross-section of 0.616 mm².


Source: ASTM

# BASIC PRINCIPLES OF CURRENT-CARRYING CAPACITY



Derating measurement method IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003-01)

#### STRUCTURE OF THE BASE CURRENT-CARRYING CAPACITY CURVE

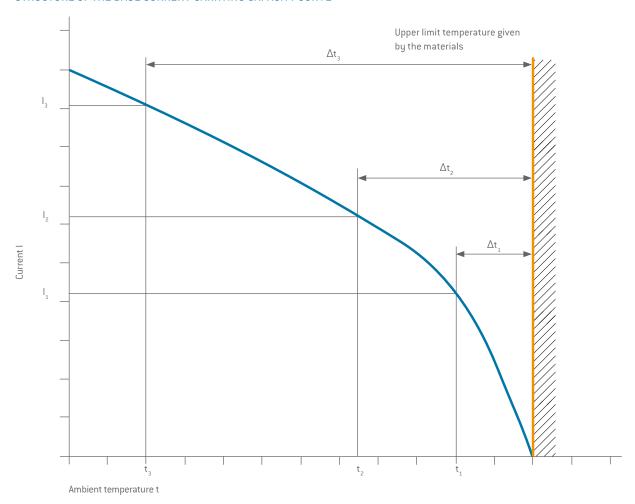

The current-carrying capacity of a connector is determined by measurement. It is determined taking self-heating by current heat and the ambient temperature into account, and is limited by the thermal properties of the contact materials used. Their upper limit temperature must not be exceeded in the process.

The relationship between current, the resulting temperature increase, conditioned by the dissipation loss at the contact resistance, and the ambient temperature is represented in a curve. The curve is plotted in a linear coordinate system with current "I" as Y-axis and temperature "t" as X-axis. The upper limit temperature forms the limit of the diagram.

Over three measurements, the temperature rise due to current heat  $[\Delta t]$  is measured respectively for different currents

on minimum three connectors, and the resulting values are joined to produce the parabolic basic curve. The basic curve is then used to derive the corrected current-carrying capacity curve (derating curve). The safety factor  $(0.8 \times I_n)$  also makes allowance for factors such as manufacturing tolerances and uncertainties in temperature measurement or the measuring arrangement.

### **CURRENT LOAD**

#### (In dependence on VDE 0276-1000:1995-06)



#### RATED CURRENT (NOMINAL CURRENT)


The metrologically determined current which is permitted to flow continuously through all contacts at the same time and will increase the contact temperature by 45 Kelvin.

The amperage is determined according to the derating measurement method (DIN EN 60512-5-2:2003-01) and derived from the derating curve. The values specified in the catalog apply to either single contacts or completely assembled inserts / modules, as indicated.

#### **DERATING FACTORS**

In the case of multi-position connectors and cables, the heating is greater than it is with single contacts. It is therefore calculated with a derating factor.

There are no direct regulations for connectors in this context. The derating factors for multi-core cables pursuant to VDE 0298-4:2023-06 are applied. The derating factor assumes relevance as of 5 live cores or count the nominal current of the fully equipped modules. Dependend on the application and the cable-management.

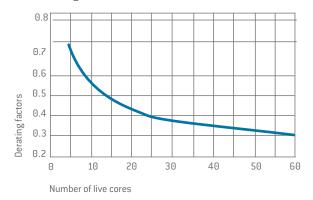

#### MAX. CONTINUOUS CURRENT

The measured amperage at room temperature (approx. 20  $^{\circ}$ C) which increases the contact temperature to the limit temperature. The values specified in the catalog apply to either single contacts or completely assembled inserts / modules, as indicated.

Number of live cores or fully equipped module	Derating factor
5	0.75
7	0.65
10	0.55
14	0.5
19	0.45
24	0.4
40	0.35
61	0.3

#### Load and derating factors

Multi-core plastic cable with conductor crosssection of 1.5 to 10 mm<sup>2</sup> when installed in the open air

#### Example:

VA cable with 24 cores is used (24 contacts). The nominal crosssection of a core is 6 mm $^2$ . A derating factor of 0.4 (e.g., cable installed in the open air) is to be presumed for the load reduction depending upon the number of live cable cores. A 6 mm $^2$  Cu line (contact diameter 3.0 mm) can be used according to current-carrying capacity with 39 ampere. The 24 contacts connector can thus be loaded with a max. of 15.6 A / contact (0.4  $\times$  39 A).

#### NOTE

Designs may differ depending upon the wiring of the modules and be verified with a heating test.

### **CURRENT-CARRYING CAPACITY DIAGRAM**




#### FOR SINGLE CONTACTS

Measurement made in acc. with IEC 60512-5-2:2002 (derating curve shown = 0.8 × base curve)

Upper limit temperature: +120 °C

Termination with nominal crosssection

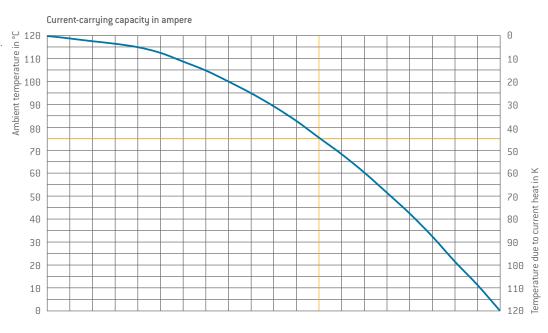

Contact	Contact-	Termination crosssection mm²	1	1	1	1	1	1	1	1	1	1	T.	1	1	T	1	1	T.	T	1	1	1
	0.7	0.14	0	ı	1,1	ı	2,1	- 1	3,2	ı	4,3	ı	5,4	ı	6,5	I	7,6	ı	8,7	I	9,8	- 1	10,9
	0.7	0.38	0	-1	1	1	2.5	1	3.5	-1	5	1	6	1	7	1	8.5	-1	9.5	1	11	1	12
	1.3	0.38	0		1.5		3		4.5		6		7.5		9		11		12.5		14		15.5
TAC®	1.3	1	0	I	2	I	4	I	6.5	1	8.5	1	10.5	1	12.5	1	15	-1	17	I	19.5	1	21.5
ODU TURNTAC®	2	1.5	0		3		6		9		12		15		18		21		24		27		30
nao	2	2.5	0	ı	4	I	8	I	12	1	16	1	20	I	24	1	27	I	30	1	33	1	37
		2.5	0		4		8		12.5		16.5		20.5		25		29		33		37		41
	3.5	4	0	-1	6.5	Î	13	1	19.5	ı	26	ı	32.5	1	39	1	45	1	51.5	1	58	1	64
		6	0		6.5		13		19.5		26		32.5		39		45		51.5		58		64
	5	10	0	-1	10	I	20	1	29	ı	38	ı	47	1	56	1	67	-1	78	1	90	1	99
	5	16	0		11		22		33		44		56		68		81		94		108		119
	8	16	0	-1	14	-1	28	-1	44	ı	59	-1	74	1	90	1	97	-1	118	1	133	-1	148
.AC®	0	25	0		17		34		51		68		85		105		119		136		154		170
ODU LAMTAC®		10	0		12		23.5		35.5		47		59		71		83		94.5		106		118
000		16	0		16		32		48		64		80		96		112		128		144		160
	12	25	0		19		38		57		76		95		115		133		150		167		186
		35	0	ı	22	1	44	1	66	ı	88	1	111	ı	135	1	156	1	176	1	195	1	217
		50	0		25		51		76		101		127		155		179		204		225		250

Nominal current

Max. continuous current

### **CURRENT-CARRYING CAPACITY DIAGRAM**




## FOR FULLY EQUIPPED MODULES

Measurement made in acc. with IEC 60512-5-2:2002 (derating curve shown = 0.8 × base curve)

Upper limit temperature:  $+120\,^{\circ}\text{C}$ 

Termination with nominal crosssection

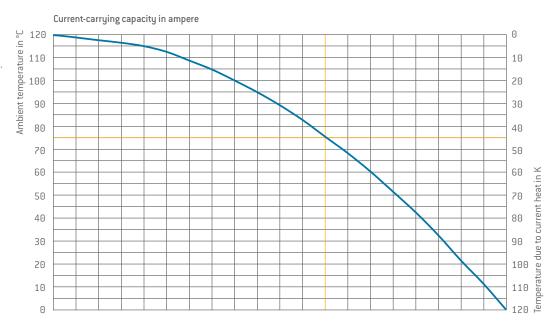

Contact	Contact-	Termination crosssection mm²	T	1	1	T	T.	1	1	1	T.	1	T.	1	1	1	1	1	T.	1	T.	1	1
		0.14 (10 pos.)	Θ	ı	0.8	ı	1.6	ı	2.4	1	3.3	ı	4.1	ı	4.9	1	5.7	ı	6.6	1	7.4	ı	8.2
		0.14 (20 pos.)	0	ı	0.5	ı	1	ı	1.6	1	2.1	1	2.6	1	3.2	1	3.7	ı	4.2	1	4.7	-1	5.2
	0.7	0.38 (10 pos.)	0		1		2		3		4		5		5.5		6.5		7.5		8.5		9.5
		0.38 (20 pos.)	0		1		2		3		4		5		5.5		6.5		7.5		8.5		9.5
		PCB	0		1		1.5		2.5		3		4		4.5		5.5		6		7		7.5
e <b>.</b>		0.38	0	ı	1	1	2	ı	3.5	1	4.5	ı	5.5	ı	7	1	8	ı	9	1	10.5	-1	11.5
ODU TURNTAC®	1.3	1	0		1.5		3.5		5.5		7.5		9.5		11.5		14		16.5		19		20.5
DT UO		PCB	0	ı	1.5	-1	2.5	ı	4	1	5	-1	6.5	ı	8	1	9.5	1	11	1	12.5	1	14
0		1.5	0		2.5		5		7.5		10		12.5		15		17.5		20		22		24
	2	2.5	0	I	3	I	6	I	9	1	12	1	15	ı	19	1	22	I	25	1	28	-1	31
		PCB	0		3		5.5		8		11		13.5		16		19		22		25		27.5
		2.5	0	I	3.5	Ì	7	I	10.5	Î	14	I	17.5	I	21	1	24	ı	27.5	1	31	-1	34.5
	3.5	4	0		5		10		15		20		25		30		34		39		44		49
		6	0	ı	5	1	10	ı	15	1	20	-1	25	I	30	1	34	-1	39	1	44	-1	49
©	5	10	0		9		18		27		37		46		56		65		74		83		92
AMTAC	J	16	0	I	11	I	22	I	33	1	45	I	56	I	68	1	79	I	90	1	101	1	112
ODU LAMTAC®	8	16	0		14		28		43		57		72		85		101		115		129		143
J		25	0	I	17	-1	33	-1	50	I	66	-1	83	1	100	1	117	1	133	1	150	-1	167

Nominal current

Max. continuous current

### NOMINAL CURRENT LOAD OF LINES



The current-carrying capacity of the individual conductors is frequently lower than that of the single contacts used. When determining the maximum current-carrying capacity, the lowest value is always to be taken into account.

Laying procedure	Exposed in air	Or on surfaces									
	Single-wire lines	Multi-wire high	Multi-wire movable lines PVC, PE, PUR, TPE								
	PVC, PE, PUR, TPE heat-resistant	For hand-held dev cold-resistant,	standard program harmonized series								
Number of live cores	1	2	3	4							
Nominal crosssection copper conductor in mm <sup>2</sup>		Nominal curi	rent load in A								
0.141	3	-	-	2							
0.251	5	-	-	4							
0.341	8	-	-	6							
0.5 <sup>1</sup>	12	3	3	9							
0.75	15	6	6	12							
1	19	10	10	15							
1.5	24	16	16	18							
2.5	32	25	20	26							
4	42	32	25	34							
6	54	40	-	44							
10	73	63	-	61							
16	98	-	-	82							
25	129	-	-	108							
35	158	-	-	135							
50	198	-	-	168							
Nominal current load acc. to:		VDE 0298-4:20	23-06 Table 11								

Nominal current load of lines with a nominal voltage of up to  $1,000\,\mathrm{V}$  and of heat-resistant lines.

The specification of data does not release one from the need to conduct the test. The original standards remain authoritative for all of the listed technical specifications.

<sup>&</sup>lt;sup>1</sup>DIN VDE 0891-1:1990-05

### **TECHNICAL TERMS**



#### AMBIENT TEMPERATURE

Temperature of the air or other medium in which a connector or a corresponding cable assembly is intended to be used.

#### AWG

American Wire Gauge see page 186

#### **BASE CURVE**

See page 187

#### **CHEMICAL RESISTANCE**

Chemical resistance is the ability of a material to protect itself against chemical attack or solvent reaction. In contrast to corrosion, there is no material removal, which is particularly typical for plastics and elastomers.

Adhesives, cleaning agents or other chemicals are often used on our products within the scope of general deployment and further handling. Contact with unsuitable chemicals may have an adverse effect on the mechanical and electrical properties of the insulation and housing materials. The connector specifications may no longer be sustainable. Please observe our handling suggestions and technical instructions as given in this catalog or corresponding assembly instructions as well as the special information for the plastic housings.

#### **CLEARANCE DISTANCE**

The shortest distance by air between two conductive parts (according to IEC 60664-1:2020 (VDE 0110-1:2022-07). The insulation coordination is explained in detail from page 179.

#### CODING (MECHANICAL)

Geometry detail that prevents interchangeability of otherwise identical connectors. This is useful when two or more identical connectors are attached to the same device.

#### CONNECTOR WITH BREAKING CAPACITY (CBC)

Connector that may be mated or unmated during intended use, live or under load (according to IEC 61984:2008 (VDE 0627:2009-11)).

#### CONNECTOR WITHOUT BREAKING CAPACITY (COC)

Connector which is not deemed to be engagend or disengaged in normal use when live under load (according to IEC 61984:2008 (VDE 0627:2009-11)).

#### **CONNECTORS**

An element which enables electrical conductors to be connected and is intended to create and / or separate connections with a suitable counterpart (according to IEC 61984:2008 (VDE 0627:2009-11)). If not otherwise specified, these are connectors without breaking capacity (COC).

#### **CONTACT RESISTANCE**

The contact resistance is the resistance at the contact zone of an electrical contact pair. The contact resistance is significantly lower than the total resistance (refer to total resistance). The specifications are average values.

#### **CORES**

Electrical conductor, solid wire or multi-wire strand, with insulation as well as any conductive layers. Cables or leads may have one or more cores.

#### **CREEPAGE DISTANCE**

The shortest distance between two conductive parts along the surface of a solid insulation material (according to IEC 60664-1:2020 (VDE 0110-1:2022-07). This factors in all elevations and recesses in the insulator, as long as defined minimum dimensions are on hand. The insulation coordination is explained in detail from page 179.

#### CRIMP BARREI

A terminal sleeve which can accommodate one or more conductors and be crimped by a crimping tool.

#### CRIMP CONNECTION (CRIMP TERMINATION)

The permanent, non-detachable and solder-free mounting of a contact to a conductor via deforming or shaping under pressure to make a good electrical and mechanical connection. Executed with crimping tool, press or automatic crimping machine (see page 168).

#### **CRIMPING AREA**

The specified area of the crimp barrel in which the crimp termination is executed by means of deforming or shaping the barrel under pressure around the conductor.

# CURRENT-CARRYING CAPACITY [NOMINAL CURRENT AND MAXIMUM CONTINUOUS CURRENT]

The value is derived from an adequately dimensioned connection cable in accordance with IEC 60228:2004

### **TECHNICAL TERMS**



(VDE 0295:2005-09; class 5), so that a significant temperature increase is not incurred. The indicated temperature increase takes place through the contact. The specifications are average values.

#### **DELIVERY FORM**

The delivery of the connector is carried out in the form of individual parts.

#### **DERATING CURVE**

See page 188

# DERATING MEASUREMENT METHOD IN ACCORDANCE WITH IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003-01)

See page 189

#### INSERTION AND WITHDRAWAL FORCE

The force required to fully insert or withdraw pluggable elements without the influence of a coupling or locking device.

#### **INSULATOR**

Part of a connector or modul that separates conductive parts with different potential, usually identical to the contact carrier.

#### **LUBRICATION**

All standard contacts are lubricated at the factory. We recommend using the ODU Electrical Contacts Service kit.

#### MATING CYCLES

A mating cycle consists of one insertion and withdrawal action of both connector parts with each other. The given values are only valid under the following conditions: clean environment, adequate radial alignment, flawless counter contact pins.

#### MAX. CONTINUOUS CURRENT

The metrologically determined amperage at room temperature (approx.  $20^{\circ}$  C) which increases the contact temperature to the limit temperature. The values specified in the catalog apply to either individual contacts or completely assembled inserts / modules, as indicated. Refer to page  $\underline{188}$  for the derating curve, if a different ambient temperature is valid.

#### **NOMINAL CURRENT**

See Rated Current.

#### NOMINAL SINGLE-CONTACT CURRENT LOAD

The current-carrying capacity which each individual contact can be loaded with on its own (see page 188.)

#### **NOMINAL VOLTAGE**

The nominal voltage of the power source for which the connector is being used. The nominal voltage may not be higher than the rated voltage of the connector.

#### **OPERATING TEMPERATURE**

Permissable temperature range between the uppermost and lowermost limits. This includes contact heating through current-carrying capacity.

#### **OPERATING VOLTAGE**

The operating voltage is the voltage supply at the device. The operating voltage may not be higher than the rated voltage of the connector.

#### **PCB TERMINATION**

A conductive connection between the PCB and an element in through-hole assembly, THT (through-hole technology).

#### **POLLUTION DEGREE**

Numerical value indicating the expected pollution of the micro-environment. The pollution levels 1-4 were defined. (Pollution: any deposit of solid, liquid or gaseous foreign matter that may reduce the electrical strength or surface resistance of the insulation; micro-environment: immediate vacinity of the insulation, which in particular influences the dimensioning of the creepage distances). See IEC 60664-1:2020 (VDE 0110-1:2022-07)) See from page 179.

#### PRINTED CIRCUIT BOARD (PCB)

A PCB is a carrier for electronic components. It serves the purposes of mechanical mounting and electrical connection.

#### RATED CURRENT (NOMINAL CURRENT)

The values specified in the catalog apply to individual contacts or to completely assembled inserts / modules, depending on the specification. See page 188

### **TECHNICAL TERMS**



#### **RATED VOLTAGE**

The rated voltage which the manufacturer specifies for a connector and which the operating and performane features relate to

#### REDUCTION FACTOR

Based on VDE 0298-4:2023-06, connectors and cables with more than 5 contacts have a higher heating rate compared to individual contacts. For this reason, the aforementioned standard is calculated with a reduction. See page 187

#### SLIDING FORCE

Please refer to Insertion and Withdrawal force.

The higher value of the insertion force is caused by the "attachment peak". Subsequently, only the pure sliding force has an effect. In the case of lamella contacts, the data refers to contacts in the lubricated state (status at delivery) and after approx. 30 mating cycles. The forces are / may be higher in new condition (lubricated). In the case of springwire contacts, the data refers to contacts in new condition. The data represents average values with a potential fluctuation of  $\pm$  50 %.

#### **SOLDER CONNECTION (SOLDER TERMINATION)**

Termination technology in which a molten additional metal (solder) with a lower melting point than the base materials to be connected is used to attach two metallic materials to one another.

#### SPINDLE LOCKING

Ergonomic locking of the housings with an easy-to-operate precsision locking spindle. This spindle enables easy closing and opening of the housings with a single turning movement. The mating and sliding forces which are thereby overcome ease handling significantly. For relubrication, we recommend the ODU Electrical Contacts Service Kit.

#### STRANDED WIRE

The stranded wire is an electrical conductor consisting of thin individual wires and is therefore easy to bend.

#### TERMINATION CROSSSECTION

The specified cross-sections correspond to a a "fine-wire" conductor structure (7 / 19 wire) according to AWG (ASTM B258-14) or to a "fine-wire" conductor structure pursuant to IEC 60228:2004 (VDE 0295:2005-09; Class 5), borderline conductor structures require a separate review.

#### TERMINATION TECHNOLOGIES

Methods for connecting the leads to the electro-mechanical element, such as solder-free connections pursuant to IEC 60352-4:2020 (DIN EN 60352-2:2014-04): crimp, screw connection etc. or soldering connection (see from page 168).

#### **TEST VOLTAGE**

The test voltage which a connector or a corresponding cable assembly can withstand under defined conditions without dielectric breakdown or flashover.

#### TIGHTNESS IEC 60529:1989 (VDE 0470-1:2014-09)

See protection types on page 178

#### TOTAL RESISTANCE

Total resistance value measured from terminal to terminal (e.g. without crimp resistance). The specifications are average values.

#### WIRE

Solid conductor



#### **GENERAL NOTE**

The connectors and cable assemblies listed in this catalog are generally designed as connectors without breaking capacity unless otherwise stated. The rated voltage specification given on the respective data sheet must be respected. Suitable precautionary measures must be taken to ensure that people do not come into contact with live conductors during installation and operation. All entries in this catalog were thoroughly reviewed before printing. ODU reserves the right to make changes based on the current status of knowledge without prior notice and without being obliged to provide replacement deliveries or refinements of older designs.



All dimensions are in mm.

Some figures are for illustrative purposes only. Subject to change without notice. Errors and omissions excepted. We reserve the right to change our products and their technical specifications at any time in the interest of technical improvement. This publication supersedes all prior publications.

ODU-MAC BLUE-LINE® / C / 0925 / EN

This publication is also available as a PDF file that can be downloaded from www.odu-connectors.com